



Test Report issued under the responsibility of:



## TEST REPORT

IEC 60335-2-24

### Safety of household and similar electrical appliances Part 2: Particular requirements for refrigerating appliances, ice-cream appliances and ice-makers

Report Number.....: CQCSC01116-0174

Date of issue.....: 2016-12-26

Total number of pages.....: 112

Name of Testing Laboratory  
preparing the Report.....: China Quality Certification Centre South China Laboratory

Applicant's name.....: Shenzhen FND Air & Water Technology Development Co., Ltd.  
4th Building, No.48, PingziRoad, Nianfeng, Pingdi, Longgang,  
Address.....: Shenzhen, China

#### Test specification:

Standard.....: IEC 60335-2-24:2010 (Seventh Edition) + A1:2012 in conjunction  
with IEC 60335-1:2010 (Fifth Edition) incl. Corr. 1:2010 and Corr.  
2:2011 + A1:2013

Test procedure.....: CB Scheme

Non-standard test method.....: N/A

Test Report Form No.....: IEC60335\_2\_24P

Test Report Form(s) Originator.....: Electrosuisse

Master TRF.....: Dated 2016-03

**Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.




If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

#### General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

|   |  |   |
|---|--|---|
| <b>Test item description..... :</b>   | Water Dispenser (AIR WATER GENERATOR)  |   |
| <b>Trade Mark..... :</b>  | N/A  |   |
| <b>Manufacturer..... :</b>  | Shenzhen FND Air & Water Technology Development Co., Ltd.<br>4th Building, No.48, PingziRoad, Nianfeng, Pingdi, Longgang,<br>Shenzhen, China |   |
| <b>Model/Type reference..... :</b>  | KLR-50LA   |   |
| <b>Ratings..... :</b>   | 220-240 V~; 50 Hz; R22; 900 W; 4 A   |   |
| <b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b> |  |   |
| <input checked="" type="checkbox"/> <b>CB Testing Laboratory:</b>                                 | China Quality Certification Centre South China Laboratory  |   |
| <b>Testing location/ address..... :</b>   | No. 11 South of Shenghui Road, Nantou, Zhongshan,<br>Guangdong, China  |   |
| <input type="checkbox"/> <b>Associated CB Testing Laboratory:</b>                                 | N/A  |   |
| <b>Testing location/ address..... :</b>   |    |   |
| <b>Tested by (name, function, signature)..... :</b>   | <br>Hu Haihan<br>(Engineer)                               |   |
| <b>Approved by (name, function, signature)... :</b>   | Peng Zhengwen<br>(Reviewer)  |  |
| <input type="checkbox"/> <b>Testing procedure: CTF Stage 1:</b>                                   | N/A  |   |
| <b>Testing location/ address..... :</b>   |  |   |
| <b>Tested by (name, function, signature)..... :</b>   |  |   |
| <b>Approved by (name, function, signature)... :</b>   |  |   |
| <input type="checkbox"/> <b>Testing procedure: CTF Stage 2:</b>                                   | N/A  |   |
| <b>Testing location/ address..... :</b>   |  |   |
| <b>Tested by (name + signature)..... :</b>  |  |   |
| <b>Witnessed by (name, function, signature).. :</b>   |  |   |
| <b>Approved by (name, function, signature)... :</b>   |  |   |
| <input type="checkbox"/> <b>Testing procedure: CTF Stage 3:</b>                                   | N/A  |   |
| <input type="checkbox"/> <b>Testing procedure: CTF Stage 4:</b>                                   | N/A  |   |
| <b>Testing location/ address..... :</b>   |  |   |
| <b>Tested by (name, function, signature)..... :</b>   |  |   |
| <b>Witnessed by (name, function, signature).. :</b>   |  |   |
| <b>Approved by (name, function, signature)... :</b>   |  |   |
| <b>Supervised by (name, function, signature) :</b>  |  |   |

**List of Attachments (including a total number of pages in each attachment):**

Attachment 1: Photo documentation (17 pages).

**Summary of testing:**

Appliance complies with these standards:

IEC 60335-2-24:2010 (Seventh Edition) + A1:2012;

IEC 60335-1:2010 (Fifth Edition) incl. Corr. 1:2010 and Corr. 2:2011 + A1:2013.

**Tests performed (name of test and test clause):**

Model KLR-50LA was selected for full test.

The submitted sample complied with above standards.

**Testing location**


See page 2

**Summary of compliance with National Differences:**

N/A

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

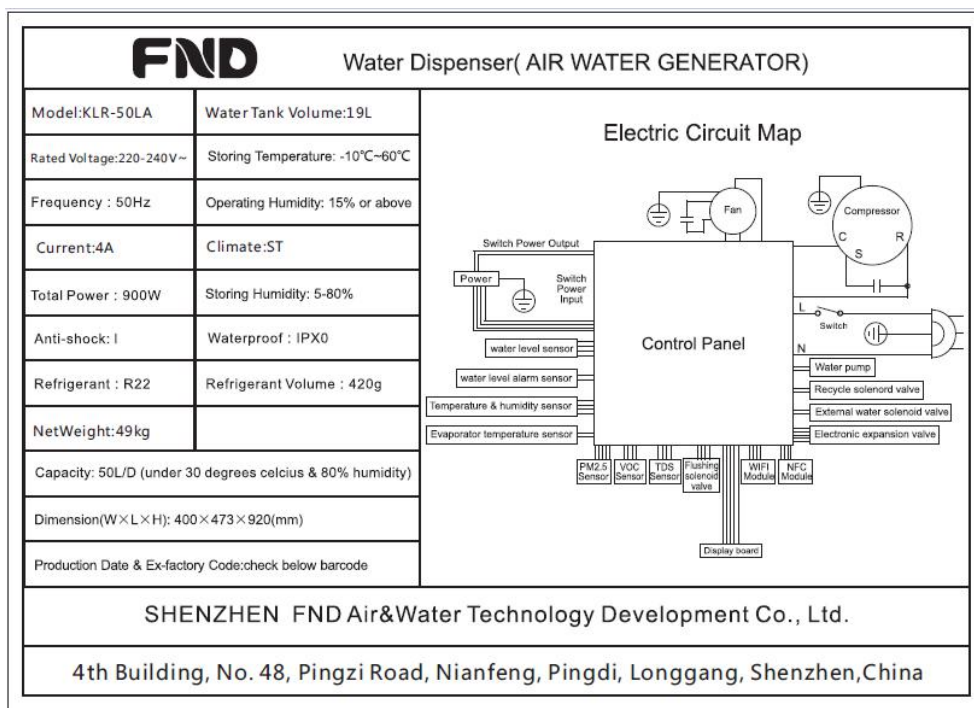





|  |   |
|--|---|
| <b>Test item particulars..... :</b>  |   |
| Classification of installation and use.....:   | Class I   |
| Supply Connection.....:  | Coupler   |
| .....:   |   |
| <b>Possible test case verdicts: .....</b>  |   |
| - test case does not apply to the test object.....:  | N/A   |
| - test object does meet the requirement.....:  | P (Pass)  |
| - test object does not meet the requirement.....:  | F (Fail)  |
| <b>Testing..... :</b>  |   |
| Date of receipt of test item.....:   | 2016-08-17  |
| Date (s) of performance of tests.....:   | 2016-08-17 to 2016-11-23  |
|  |   |
| <b>General remarks:</b>  |   |
| <p>"(See Enclosure #)" refers to additional information appended to the report.</p> <p>"(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> |   |
| <b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60335-1:</b>   |   |
| The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:                                | <input type="checkbox"/> Yes<br><input type="checkbox"/> Not applicable   |
| When differences exist; they shall be identified in the General product information section.   |   |
| <b>Name and address of factory (ies)..... :</b>  | Guangdong Shunde Hongshu Environment Protection Technology Co., Ltd.<br>17th of the 1st floor, No. 16, Huaafa Road, Huakou, Ronggui, Shunde, Foshan, Guangdong, China |
| <b>General product information:</b>  |   |
| Remark: The original test Report Ref. No. CQCSCL0116-0174, dated 2016-11-23 was modified on 2016-12-26 to correct the applicant's address and manufacturer's address, and the report No. of the affected pages was changed to CQCSCL0116-0174-XG1.   |   |

| IEC 60335-2-24 |   |                                       |         |
|----------------|---|---------------------------------------|---------|
| Clause         | Requirement – Test  | Result – Remark                       | Verdict |
| <b>5</b>       | <b>GENERAL CONDITIONS FOR THE TESTS</b>   |                                       | —       |
|                | Tests performed according to cl. 5, e.g. nature of supply, sequence of testing, etc.  |                                       | P       |
| 5.3            | Before starting the tests (IEC 60335-2-24:2010):  |                                       | —       |
|                | - ice cream appliances are operated empty of rated voltage for 1 h  |                                       | N/A     |
|                | - other compression-type appliances shall be operated at rated voltage for 24 h then switched off for 12 h  |                                       | P       |
| 5.4            | Tests are additionally carried out with all combinations of energy sources supplied simultaneously unless this is prevented by interlocking devices (IEC 60335-2-24:2010) |                                       | N/A     |
| 5.7            | Tests according to sub-clause 10, 11, 13 and subcl. 19.103 at ambient temperature of (IEC 60335-2-24:2010)  |                                       | —       |
|                | (23 ± 2) °C for ice-cream appliances  |                                       | N/A     |
|                | (32 ± 1) °C Climatic class  | SN <input type="checkbox"/>           | N/A     |
|                | (32 ± 1) °C Climatic class  | N <input type="checkbox"/>            | N/A     |
|                | (38 ± 1) °C Climatic class  | ST <input type="checkbox"/>           | N/A     |
|                | (43 ± 1) °C Climatic class  | T <input checked="" type="checkbox"/> | P       |
| 5.102          | Compression-type appliances with heating systems and Peltier-type appliances are tested as combined appliances (IEC 60335-2-24:2010)                                      |                                       | N/A     |
| <b>6</b>       | <b>CLASSIFICATION</b>   |                                       | —       |
| 6.1            | Protection against electric shock: Class 0, 0I, I, II, III  | Class I                               | P       |
| 6.2            | Protection against harmful ingress of water   | IPX0                                  | N/A     |
| 6.101          | Appliances, other than ice-cream appliances, shall be of one or more of the following climatic classes: SN, N, ST, T (IEC 60335-2-24:2010)                                |                                       | —       |
| <b>7</b>       | <b>MARKING AND INSTRUCTIONS</b>   |                                       | —       |
| 7.1            | Rated voltage or voltage range (V) .....  | 220-240 V                             | P       |
|                | Nature of supply.....   | ~                                     | P       |
|                | Rated frequency (Hz) .....  | 50 Hz                                 | P       |
|                | Rated power input (W) .....   | See rating labels                     | P       |
|                | Rated current (A) .....   | See rating labels                     | P       |
|                | Manufacturer's or responsible vendor's name, trademark or identification mark.....  | See rating labels                     | P       |
|                | Model or type reference.....  | See rating labels                     | P       |
|                | Symbol 5172 of IEC 60417, for Class II appliances   | Class I appliance                     | N/A     |
|                | IP number, other than IPX0.....   | IPX0                                  | N/A     |

| IEC 60335-2-24 |  |                   |         |
|----------------|--|-------------------|---------|
| Clause         | Requirement – Test   | Result – Remark   | Verdict |
|                | Symbol IEC 60417-5180, for class III appliances, unless  | Class I appliance | N/A     |
|                | the appliance is operated by batteries only  |                   | N/A     |
|                | Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage |                   | N/A     |
|                | Power input of heating systems, if greater than 100 W, (W) (IEC 60335-2-24:2010)   |                   | N/A     |
|                | Defrosting input, in W, if greater than the rated power input, (W) (IEC 60335-2-24:2010)   |                   | N/A     |
|                | Rated power input in Watts (IEC 60335-2-24:2010)   | See rating labels | P       |
|                | Rated current in Amperes for compression-type appliances (IEC 60335-2-24:2010)   | See rating labels | P       |
|                | Climatic class of the appliance (SN, N, ST or T) (IEC 60335-2-24:2010)   | T                 | P       |
|                | Maximum rated input of lamps in Watts (IEC 60335-2-24:2010)  |                   | N/A     |
|                | Total mass of the refrigerant (IEC 60335-2-24:2010)  | 420 g             | P       |
|                | For a single component refrigerant, at least one of the following (IEC 60335-2-24:2010):   |                   | —       |
|                | - the chemical name  |                   | N/A     |
|                | - the chemical formula   |                   | N/A     |
|                | - the refrigerant number   | R22               | P       |
|                | For a blended refrigerant, at least one of the following (IEC 60335-2-24:2010):  |                   | —       |
|                | - the chemical name and nominal proportion of each of the components   |                   | N/A     |
|                | - the chemical formula and nominal proportion for each of the components   |                   | N/A     |
|                | - the refrigerant numbers and nominal proportion of each of the components   |                   | N/A     |
|                | - the refrigerant number of the refrigerant blend  |                   | N/A     |
|                | The chemical name or refrigerant number of the insulation blowing gas (IEC 60335-2-24:2010)  |                   | N/A     |
|                | Battery voltage for appliances which can be mains and battery operated (IEC 60335-2-24:2010)   |                   | N/A     |
|                | Max. power input for incorporated ice-maker, if greater than 100 W (IEC 60335-2-24:2010)   |                   | N/A     |
|                | Ice-makers shall be marked with the maximum permissible water level (IEC 60335-2-24:2010)  |                   | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
|                | Compression-type refrigerating systems appliance shall be marked with mass of the refrigerant for each separate refrigerant circuit (IEC 60335-2-24:2010)                  | 420 g           | P       |
|                | Compression-type appliances flammable which use refrigerants shall be marked the symbol Caution: risk of fire” (IEC 60335-2-24:2010)                                       |                 | N/A     |
|                | Appliances employing R-744 in a transcritical refrigeration system shall be marked with the substance of the following: (IEC 60335-2-24:2010)                              |                 | —       |
|                | Warning: System contains refrigerant under high pressure. Do not tamper with the system. It must be serviced by qualified persons only.                                    |                 | N/A     |
|                | Appliances employing R-744 in a transcritical refrigeration system shall be marked with symbol ISO 7000 – 1701 (2004-01). (IEC 60335-2-24:2010)                            |                 | N/A     |
| 7.2            | Warning for stationary appliances for multiple supply  |                 | N/A     |
|                | Warning placed in vicinity of terminal cover   |                 | N/A     |
| 7.3            | Range of rated values marked with the lower and upper limits separated by a hyphen   | 220-240 V       | P       |
|                | Different rated values marked with the values separated by an oblique stroke   |                 | N/A     |
| 7.4            | Appliances adjustable for different rated voltages or rated frequencies, the voltage or the frequency setting is clearly discernible                                       |                 | N/A     |
|                | Requirement met if frequent changes are not required and the rated voltage or rated frequency to which the appliance is to be adjusted is determined from a wiring diagram |                 | N/A     |
| 7.5            | Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless          |                 | P       |
|                | the power input is related to the arithmetic mean value of the rated voltage range   |                 | P       |
|                | Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear   |                 | N/A     |
| 7.6            | Correct symbols used   |                 | P       |
|                | Symbol for nature of supply placed next to rated voltage   |                 | P       |
|                | Symbol for class II appliances placed unlikely to be confused with other marking   |                 | N/A     |
|                | Units of physical quantities and their symbols according to international standardized system  |                 | P       |

| IEC 60335-2-24 |  |                            |         |
|----------------|--|----------------------------|---------|
| Clause         | Requirement – Test   | Result – Remark            | Verdict |
|                |  Symbol IEC 60417-5005 (2002-10)<br>Plus; positive polarity (IEC 60335-2-24:2010)   |                            | N/A     |
|                |  Symbol IEC 60417-5006 (2002-10)<br>Minus; negative polarity (IEC 60335-2-24:2010)  |                            | N/A     |
|                |  Symbol ISO 7010 W021<br>Caution: risk of fire (A1:12)  |                            | N/A     |
|                |  Symbol ISO 7000-1701 (2004-01)<br>Pressure (IEC 60335-2-24:2010)   |                            | N/A     |
| 7.7            | Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply   |                            | N/A     |
|                | correct mode of connection is obvious  |                            | N/A     |
| 7.8            | Except for type Z attachment, terminals for connection to the supply mains indicated as follows:   |                            | —       |
|                | - marking of terminals exclusively for the neutral conductor (letter N)  |                            | N/A     |
|                | - marking of protective earthing terminals (symbol IEC 60417-5019)   |                            | P       |
|                | - marking of functional earthing terminals (symbol IEC 60417-5018)   |                            | N/A     |
|                | - marking not placed on removable parts  |                            | P       |
| 7.9            | Marking or placing of switches which may cause a hazard  |                            | N/A     |
| 7.10           | Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means:  |                            | P       |
|                | This applies also to switches which are part of a control  |                            | P       |
|                | If figures are used, the off position indicated by the figure 0  |                            | N/A     |
|                | The figure 0 indicates only OFF position, unless no confusion with the OFF position  |                            | N/A     |
|                | See Note (IEC 60335-2-24:2010)   |                            | N/A     |
| 7.11           | Indication for direction of adjustment of controls   |                            | P       |
| 7.12           | Instructions for safe use provided   | See the instruction manual | P       |
|                | Details concerning precautions during user maintenance   |                            | P       |
|                | The instructions state that:   |                            | —       |
|                | - the appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction |                            | P       |



| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | - children being supervised not to play with the appliance  |                 | P       |
|                | For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided                |                 | N/A     |
|                | Instructions for class III appliances state that it must only be supplied at SELV, unless   |                 | N/A     |
|                | it is a battery-operated appliance, the battery being charged outside the appliance   |                 | N/A     |
|                | For appliances for altitudes exceeding 2000 m, the maximum altitude is stated.....:   |                 | N/A     |
|                | The instructions for appliances incorporating a functional earth states that the appliance incorporates an earth connection for functional purposes only                              |                 | N/A     |
|                | Instructions for refrigerating appliances and ice-makers for camping or similar use include the substance of the following (IEC 60335-2-24:2010):                                     |                 | —       |
|                | - suitable for camping use  |                 | N/A     |
|                | - the appliances connected to more than one source of energy  |                 | N/A     |
|                | - the appliances shall not be exposed to rain unless at least IPX4  |                 | N/A     |
|                | - for ice-makers not intended to be connected to the water supply<br>WARNING: fill with potable water only  |                 | N/A     |
|                | For compression-type appliances which use flammable refrigerants, instructions shall include information pertaining to the installation, handling, servicing (IEC 60335-2-24:2010)    |                 | N/A     |
|                | For compression-type appliances that use flammable refrigerants shall additionally include the substance of the warnings listed below: (IEC 60335-2-24:2010)                          |                 | N/A     |
|                | - WARNING – Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction (IEC 60335-2-24:2010)  |                 | N/A     |
|                | - WARNING – Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer (IEC 60335-2-24:2010)                 |                 | N/A     |
|                | - WARNING – Do not damage the refrigerant circuit (IEC 60335-2-24:2010)   |                 | N/A     |
|                | - WARNING – Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer (IEC 60335-2-24:2010) |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | Appliances which use flammable insulation blowing gases, instructions shall include information regarding disposal of the appliance (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Instructions for ice-cream appliances shall include ingredients and max. quantity of mixtures that can be used in the appliance (IEC 60335-2-24:2010)       |                 | N/A     |
|                | The instructions shall state the substance of the following (IEC 60335-2-24:2010)   |                 | —       |
|                | Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.   |                 | N/A     |
|                | If symbol ISO 7000–1701 (2004-01) is used, its meaning shall be explained.  |                 | N/A     |
|                | The instructions shall include the substance of the following (IEC 60335-2-24:2010)   |                 | —       |
|                | This appliance is intended to be used in household and similar applications (list)  |                 | P       |
| 7.12.1         | Sufficient details for installation supplied  |                 | P       |
|                | For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated                                    |                 | N/A     |
|                | If different rated voltages or different rated frequencies are marked, the instructions state what action to be taken to adjust the appliance               |                 | P       |
|                | The method for replacing illuminating lamps included (IEC 60335-2-24:2010), if the lamps can be replaced by the user (A1:12)                                |                 | N/A     |
|                | Appliances designed for incorporating ice-makers, the types of ice-makers (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Information on the installation of incorporated ice-makers as optional accessories (IEC 60335-2-24:2010)  |                 | N/A     |
|                | Incorporated ice-makers installed only by the manufacturer or its service agent (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Ice makers intended to be connected to the water supply (IEC 60335-2-24:2010):  |                 | —       |
|                | WARNING: connect to potable water supply only (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Instructions for fixed appliances shall include the following warning (IEC 60335-2-24:2010):  |                 | —       |
|                | WARNING: To avoid a hazard due to instability of the appliance, it must be fixed in accordance with the instructions (IEC 60335-2-24:2010)                  |                 | N/A     |
|                | In appliances employing R-744 in a transcritical refrigeration system the instructions shall include the substance of the following (IEC 60335-2-24:2010) : |                 | —       |
|                | WARNING: The refrigeration system is under high pressure. Do not tamper with it. Contact qualified service personal before disposal.                        |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| 7.12.2         | Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules |                 | N/A     |
| 7.12.3         | Insulation of the fixed wiring in contact with parts exceeding 50 K during Clause 11; instructions stating that the fixed wiring must be protected  |                 | N/A     |
| 7.12.4         | Instructions for built-in appliances:   |                 | —       |
|                | - dimensions of space   |                 | N/A     |
|                | - dimensions and position of supporting and fixing  |                 | N/A     |
|                | - minimum distances between parts and surrounding structure   |                 | N/A     |
|                | - minimum dimensions of ventilating openings and arrangement  |                 | N/A     |
|                | - connection to supply mains and interconnection of separate components   |                 | N/A     |
|                | - allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless   |                 | N/A     |
|                | a switch complying with 24.3  |                 | N/A     |
|                | Also applicable to fixed appliances (IEC 60335-2-24:2010)   |                 | N/A     |
| 7.12.5         | Replacement cord instructions, type X attachment with a specially prepared cord   |                 | N/A     |
|                | Replacement cord instructions, type Y attachment  |                 | N/A     |
|                | Replacement cord instructions, type Z attachment  |                 | N/A     |
| 7.12.6         | Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard   |                 | N/A     |
| 7.12.7         | The instructions for fixed appliances shall state how the appliance is to be fixed to its support   |                 | N/A     |
| 7.12.8         | Instructions for appliances connected to the water mains:   |                 | —       |
|                | - max. inlet water pressure (Pa).....:  |                 | N/A     |
|                | - min. inlet water pressure, if necessary (Pa).....:  |                 | N/A     |
|                | Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets   |                 | N/A     |
| 7.13           | Instructions and other texts in an official language  | English         | P       |
| 7.14           | Marking clearly legible and durable, rubbing test as specified  |                 | P       |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
|                | The height of the triangle in the symbol “Caution: risk of fire” shall be at least 15 mm (IEC 60335-2-24:2010)   |                 | N/A     |
|                | The height of the letters used for the marking of the type of flammable blowing insulation gas shall be at least 40 mm (IEC 60335-2-24:2010 + A1:12)   |                 | N/A     |
| 7.15           | Marking on a main part   |                 | P       |
|                | Marking clearly discernible from the outside, if necessary after removal of a cover  |                 | P       |
|                | For portable appliances, cover can be removed or opened without a tool   |                 | N/A     |
|                | For stationary appliances, name, trademark or identification mark and model or type reference visible after installation   |                 | P       |
|                | For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions  |                 | N/A     |
|                | Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading  |                 | P       |
|                | The symbol IEC 60417-5018 placed next to the symbol IEC 60417-5172 or IEC 60417-5180   |                 | N/A     |
|                | Max. rated input of lamps discernible (IEC 60335-2-24:2010 + A1:12)  |                 | N/A     |
|                | Compression-type appliances the marking of the type of flammable refrigerant and of the flammable insulation blowing gas, as well as the symbol Caution: risk of fire, shall be visible when gaining access to the motor-compressors (IEC 60335-2-24:2010) |                 | N/A     |
| 7.16           | Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link  |                 | P       |
| 7.101          | Appliances which can be battery operated the connection shall be indicated by the symbol “+” or the colour red and “-” or black (IEC 60335-2-24:2010)  |                 | N/A     |
|                | The positive terminal shall be indicated by symbol IEC 60417-5005 (2002-10) and the negative terminal by symbol IEC 60417-5006 (2002-10). (IEC 60335-2-24:2010)  |                 | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
| <b>8</b>       | <b>PROTECTION AGAINST ACCESS TO LIVE PARTS</b>   |                 | —       |
| 8.1            | Adequate protection against accidental contact with live parts   |                 | P       |
| 8.1.1          | Requirement applies for all positions, detachable parts removed  |                 | P       |
|                | Lamps behind a detachable cover not removed, if conditions met   |                 | N/A     |
|                | Insertion or removal of lamps, protection against contact with live parts of the lamp cap  |                 | N/A     |
|                | Use of test probe B of IEC 61032, with a force not exceeding 1 N: no contact with live parts   |                 | P       |
|                | Use of test probe B of IEC 61032 through openings, with a force of 20 N: no contact with live parts  |                 | P       |
|                | Removal of lamps: protection against contact with live parts (IEC 60335-2-24:2010)   |                 | N/A     |
| 8.1.2          | Use of test probe 13 of IEC 61032 through openings in class 0 appliances and class II appliances/constructions: no contact with live parts |                 | P       |
|                | Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts        |                 | P       |
| 8.1.3          | For appliances other than class II, use of test probe 41 of IEC 61032: no contact with live parts of visible glowing heating elements      |                 | N/A     |
| 8.1.4          | Accessible part not considered live if:  |                 | —       |
|                | - safety extra-low a.c. voltage: peak value not exceeding 42.4 V   |                 | N/A     |
|                | - safety extra-low d.c. voltage: not exceeding 42.4 V  |                 | N/A     |
|                | - or separated from live parts by protective impedance   |                 | N/A     |
|                | If protective impedance: d.c. current not exceeding 2 mA, and  |                 | N/A     |
|                | a.c. peak value not exceeding 0.7mA  |                 | N/A     |
|                | - for peak values over 42.4 V up to and including 450 V, capacitance not exceeding 0.1 $\mu$ F   |                 | N/A     |
|                | - for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 $\mu$ C   |                 | N/A     |
|                | - for voltages having a peak value over 15 kV, the energy in the discharge shall not exceed 350 mJ.  |                 | N/A     |
| 8.1.5          | Live parts protected at least by basic insulation before installation or assembly:   |                 | —       |
|                | - built-in appliances  |                 | N/A     |
|                | - fixed appliances   |                 | N/A     |
|                | - appliances delivered in separate units   |                 | N/A     |

| IEC 60335-2-24 |   |                      |         |
|----------------|---|----------------------|---------|
| Clause         | Requirement – Test  | Result – Remark      | Verdict |
| 8.2            | Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only  |                      | P       |
|                | Only possible to touch parts separated from live parts by double or reinforced insulation   |                      | P       |
|                |   |                      |         |
| <b>9</b>       | <b>STARTING OF MOTOR-OPERATED APPLIANCES</b>  |                      | —       |
|                | Requirements and tests are specified in part 2 when necessary   |                      | N/A     |
|                | Not applicable (IEC 60335-2-24:2010)  |                      | —       |
|                |   |                      |         |
| <b>10</b>      | <b>POWER INPUT AND CURRENT</b>  |                      | —       |
| 10.1           | Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in Table 1:   | (see appended table) | P       |
|                | If the power input varies throughout the operating cycle and the maximum value of the power input exceeds, by a factor greater than two, the arithmetic mean value of the power input occurring during a representative period, the power input is the maximum value that is exceeded for more than 10 % of the representative period |                      | N/A     |
|                | Otherwise the power input is the arithmetic mean value  |                      | P       |
|                | Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless   |                      | N/A     |
|                | the rated power input is related to the arithmetic mean value   |                      | P       |
|                | Appliances being operated under normal operation, user adjustable temperature controls are set to give the lowest temperature (IEC 60335-2-24:2010)   |                      | P       |
|                | The power input stabilized, steady conditions established (IEC 60335-2-24:2010)   |                      | P       |
|                | A period between the making and the breaking of the temperature control, or highest and lowest values of power input measured excluding starting power input but including the power input of the incorporated ice-maker, if any (IEC 60335-2-24:2010)  |                      | P       |
| 10.2           | Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in Table 2:   | (see appended table) | P       |

| IEC 60335-2-24 |   |   |         |
|----------------|---|---|---------|
| Clause         | Requirement – Test  | Result – Remark                                 | Verdict |
|                | If the current varies throughout the operating cycle and the maximum value of the current exceeds, by a factor greater than two, the arithmetic mean value of the current occurring during a representative period, the current is the maximum value that is exceeded for more than 10 % of the representative period |   | N/A     |
|                | Otherwise the current is the arithmetic mean value  |   | P       |
|                | Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless   |   | N/A     |
|                | The appliance being operated under normal operation, user adjustable temperature controls are set to give the lowest temperature (IEC 60335-2-24:2010)  |   | P       |
|                | The appliance is operated for 1 h. The max. value of the current averaged over any 5 min period is obtained. The interval shall not exceed 30 s. Starting after 1 min (IEC 60335-2-24:2010)   |   | P       |
| 10.101         | The power input of the defrosting system, deviation shown in Table 1 (IEC 60335-2-24:2010)  |   | N/A     |
| 10.102         | The power input of any heating system, deviation shown in Table 1 (IEC 60335-2-24:2010)   |   | N/A     |
|                |   |   |         |
| <b>11</b>      | <b>HEATING</b>  |   | —       |
| 11.1           | No excessive temperatures in normal use   |   | P       |
|                | If the winding temperatures of motor-compressors exceed the values given in Table 101, compliance is checked by the test of 11.101 (IEC 60335-2-24:2010)  |   | N/A     |
|                | The winding temperatures of motor-compressors conforming IEC 60335-2-34 (incl. Annex AA) are not measured (IEC 60335-2-24:2010)   | Motor-compressors complying with IEC 60335-2-34 | P       |
| 11.2           | Placing and mounting of appliance as described (IEC 60335-2-24:2010)  |   | P       |
|                | - according to instructions for installation  |   | N/A     |
|                | - in a test corner  |   | N/A     |
|                | - test enclosure  |   | P       |
| 11.3           | Temperature rises, other than of windings, determined by thermocouples  |   | P       |
|                | Temperature rises of windings determined by resistance method, unless   |   | P       |
|                | the windings are non-uniform or it is difficult to make the necessary connections   |   | P       |
| 11.4           | Heating appliances operated under normal operation at 1.15 times rated power input:   |   | N/A     |

| IEC 60335-2-24 |   |                      |         |
|----------------|---|----------------------|---------|
| Clause         | Requirement – Test  | Result – Remark      | Verdict |
| 11.5           | Motor-operated appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage..... : |                      | N/A     |
| 11.6           | Combined appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage..... :       | 254,4 V              | P       |
| 11.7           | Operation duration corresponding to the most unfavourable conditions of normal use  |                      | P       |
|                | The appliances is operated until steady conditions are established (IEC 60335-2-24:2010)  |                      | P       |
| 11.8           | Temperature rises monitored continuously and not exceeding the values in Table 3 :  | (see appended table) | P       |
|                | If the temperature rise of a motor winding exceeds the value of Table 3, or   |                      | N/A     |
|                | if there is doubt with regard to classification of insulation,  |                      | N/A     |
|                | tests of Annex C are carried out  |                      | N/A     |
|                | Sealing compound does not flow out  |                      | P       |
|                | Protective devices do not operate, except   |                      | P       |
|                | components in protective electronic circuits tested for the number of cycles specified in 24.1.4  |                      | N/A     |
|                | During the test protective devices do not operate (IEC 60335-2-24:2010)   |                      | P       |
|                | During the test sealing compound doesn't flow out (IEC 60335-2-24:2010)   |                      | P       |
|                | During the test temperatures are monitored continuously (IEC 60335-2-24:2010)   |                      | P       |
|                | For (SN) and (N) class, the temperature rises not exceeding values in Table 3 (IEC 60335-2-24:2010)                                     |                      | N/A     |
|                | For (ST) and (T) class, the temperature rises not exceeding values in Table 3 reduced by 7 K (IEC 60335-2-24:2010)                      |                      | P       |
|                | For motor-compressors not conforming to IEC 60335-2-34 (incl. its Annex AA), the temperatures of (IEC 60335-2-24:2010)                  |                      | —       |
|                | - housings of motor-compressors and   |                      | N/A     |
|                | - windings of motor-compressors   |                      | N/A     |
|                | shall not exceed the values given in Table 101  |                      | N/A     |
|                | For motor-compressors conforming to IEC 60335-2-34 (including its Annex AA), the temperatures are not measured (IEC 60335-2-24:2010)    |                      | P       |
|                | The temperature rise of the external enclosure of motor-operated appliances not applicable for: (IEC 60335-2-24:2010)                   |                      | —       |
|                | - built-in appliances   |                      | N/A     |
|                | - other appliances (distance from a wall $\leq$ 75 mm)  |                      | N/A     |



| IEC 60335-2-24 |   |                      |         |
|----------------|---|----------------------|---------|
| Clause         | Requirement – Test  | Result – Remark      | Verdict |
|                | - max. temperature rises specified in Table 101   |                      | N/A     |
|                | The temperature of ballast windings and their associated wiring shall not exceed the values specified in 12.4 of IEC 60598-1, when measured under the conditions stated (IEC 60335-2-24:2010) |                      | N/A     |
| 11.101         | If the temperatures exceed the limits, the test is carried out again (IEC 60335-2-24:2010):   |                      | —       |
|                | - winding temperatures at the end of a running cycle not higher than the limits given in Table 101  |                      | N/A     |
| 11.102         | Any defrosting system, temperature rises don't exceed the values given in 11.8 (IEC 60335-2-24:2010)  |                      | N/A     |
|                | Manual defrosting (IEC 60335-2-24:2010)   |                      | N/A     |
|                | Automatic defrosting (IEC 60335-2-24:2010)  |                      | N/A     |
| 11.103         | Heating systems, other than defrosting, temperature rises don't exceed the values given in 11.8 (IEC 60335-2-24:2010)   |                      | N/A     |
| <b>13</b>      | <b>LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE</b>   |                      | —       |
| 13.1           | Leakage current not excessive and electric strength adequate  |                      | P       |
|                | Heating appliances operated at 1.15 times rated power input (W) .....   |                      | N/A     |
|                | Motor-operated appliances and combined appliances supplied at 1.06 times rated voltage (V) .....  | 254,4 V              | P       |
|                | Protective impedance and radio interference filters disconnected before carrying out the tests  |                      | N/A     |
|                | The test of 13.2 does not apply to battery circuit (IEC 60335-2-24:2010)  |                      | N/A     |
| 13.2           | For class 0, class II and class III appliances, leakage current measured by means of the circuit described in figure 4 of IEC 60990   |                      | N/A     |
|                | For other appliances, a low impedance ammeter may be used   |                      | P       |
|                | Leakage current measurements and limits (IEC 60335-2-24:2010)   | (see appended table) | P       |
| 13.3           | Electric strength tests according to Table 4.....   | (see appended table) | P       |
|                | No breakdown during the tests   |                      | P       |
|                | The test voltage for reinforced insulation is applied between separate circuits for battery operation and mains supply operation (IEC 60335-2-24:2010)  |                      | N/A     |

| IEC 60335-2-24 |   |  |         |
|----------------|---|--|---------|
| Clause         | Requirement – Test  | Result – Remark  | Verdict |
| <b>14</b>      | <b>TRANSIENT OVERVOLTAGES</b>   |  | —       |
|                | Appliances withstand the transient over-voltages to which they may be subjected   |  | N/A     |
|                | Clearances having a value less than specified in Table 16 subjected to an impulse voltage test, the test voltage specified in Table 6.....:   | No clearances having a value less than specified in table 16 | N/A     |
|                | No flashover during the test, unless  |  | N/A     |
|                | of functional insulation if the appliance complies with Clause 19 with the clearance short-circuited  |  | N/A     |
| <b>15</b>      | <b>MOISTURE RESISTANCE</b>  |  | —       |
| 15.1           | Enclosure provides the degree of moisture protection according to classification of the appliance   | IPX0   | N/A     |
|                | Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3   |  | N/A     |
|                | No trace of water on insulation which can result in a reduction of clearances and creepage distances below values specified in Clause 29  |  | N/A     |
| 15.1.1         | Appliances, other than IPX0, subjected to tests as specified in IEC 60529.....:   |  | N/A     |
|                | Water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains are subjected to the test specified for IPX7 appliances.           |  | N/A     |
| 15.1.2         | Hand-held appliance turned continuously through the most unfavourable positions during the test   |  | N/A     |
|                | Built-in appliances installed according to the instructions   |  | N/A     |
|                | Appliances placed or used on the floor or table placed on a horizontal unperforated support   |  | N/A     |
|                | Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board  |  | N/A     |
|                | For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube  |  | N/A     |
|                | For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube, and  |  | N/A     |
|                | for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube |  | N/A     |
|                | Wall-mounted appliances, take into account the distance to the floor stated in the instructions   |  | N/A     |

| IEC 60335-2-24 |   |                  |         |
|----------------|---|------------------|---------|
| Clause         | Requirement – Test  | Result – Remark  | Verdict |
|                | Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support, and |                  | N/A     |
|                | for IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min   |                  | N/A     |
|                | Appliances with type X attachment fitted with a flexible cord as described  |                  | N/A     |
|                | Detachable parts subjected to the relevant treatment with the main part   |                  | N/A     |
|                | However, if a part has to be removed for user maintenance and a tool is needed, this part is not removed  |                  | N/A     |
| 15.2           | Spillage of liquid does not affect the electrical insulation  |                  | P       |
|                | Spillage solution comprising water containing approximately 1 % NaCl and 0.6 % rinsing agent  |                  | P       |
|                | Appliances with type X attachment fitted with a flexible cord as described  |                  | N/A     |
|                | Appliances incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable   |                  | P       |
|                | Detachable parts removed  |                  | N/A     |
|                | Overfilling test with additional amount of water, over a period of 1 min (I) .....  |                  | P       |
|                | The appliance withstands the electric strength test of 16.3   |                  | P       |
|                | No trace of water on insulation that can result in a reduction of clearances and creepage distances below values specified in Clause 29   |                  | P       |
|                | Lamp covers are not removed (IEC 60335-2-24:2010)   |                  | N/A     |
| 15.3           | Appliances proof against humid conditions   |                  | P       |
|                | Checked by test Cab: Damp heat steady state in IEC 60068-2-78   |                  | P       |
|                | Detachable parts removed and subjected, if necessary, to the humidity test with the main part   |                  | P       |
|                | Humidity test for 48 h in a humidity cabinet  | 25 °C, 93 % R.H. | P       |
|                | Reassembly of those parts that may have been removed  |                  | P       |
|                | The appliance withstands the tests of Clause 16   |                  | P       |
| 15.101         | Spillage of liquid from inside does not affect their electrical insulation (IEC 60335-2-24:2010)  |                  | P       |
|                | The relevant tests of 15.102, 15.103 and 15.104. are carried out (IEC 60335-2-24:2010)  |                  | P       |

| IEC 60335-2-24 |   |                      |         |
|----------------|---|----------------------|---------|
| Clause         | Requirement – Test  | Result – Remark      | Verdict |
| 15.102         | The apparatus shown in figure 101 is filled with water containing 1 % NaCl and 0.6 % of acid rinsing agent (IEC 60335-2-24:2010)                                      |                      | P       |
| 15.103         | Appliances, other than built-in appliances, ice-makers and ice-cream appliances, are tilted at an angle of up to 2° (IEC 60335-2-24:2010)                             |                      | P       |
|                | Test with 0.5 l water containing 1 % NaCl and 0.6 % of acid rinsing agent over the top of the appliance (IEC 60335-2-24:2010)   |                      | P       |
| 15.104         | Ice-makers which are directly connected to the water supply, is filled with water as in normal use. The inlet valve is then held open for 1 min (IEC 60335-2-24:2010) |                      | N/A     |
| 15.105         | Operation of a defrosting system does not affect the electrical insulation of defrost heating elements (IEC 60335-2-24:2010)  |                      | N/A     |
|                | If the water is in contact with the defrost heating element or its insulation, test of 22.102 is carried out (IEC 60335-2-24:2010)                                    |                      | N/A     |
| <b>16</b>      | <b>LEAKAGE CURRENT AND ELECTRIC STRENGTH</b>  |                      | —       |
| 16.1           | Leakage current not excessive and electric strength adequate  |                      | P       |
|                | Protective impedance disconnected from live parts before carrying out the tests   |                      | N/A     |
|                | Tests carried out at room temperature and not connected to the supply   |                      | P       |
|                | The test of 16.2 does not apply to battery circuits (IEC 60335-2-24:2010)   |                      | N/A     |
| 16.2           | Single-phase appliances: test voltage 1.06 times rated voltage (V) .....  | 254,4 V              | P       |
|                | Three-phase appliances: test voltage 1.06 times rated voltage divided by $\sqrt{3}$ (V) .....   |                      | N/A     |
|                | Leakage current measurements:   | (see appended table) | P       |
|                | Limit values doubled if:  |                      | —       |
|                | - all controls have an off position in all poles, or  |                      | N/A     |
|                | - the appliance has no control other than a thermal cut-out, or   |                      | N/A     |
|                | - all thermostats, temperature limiters and energy regulators do not have an off position, or   |                      | N/A     |
|                | - the appliance has radio interference filters  |                      | N/A     |
|                | With the radio interference filters disconnected, the leakage current do not exceed limits specified  |                      | N/A     |
|                | Limits for class 0I appliances and the various types of class I appliances (IEC 60335-2-24:2010)  |                      | P       |
| 16.3           | Electric strength tests according to Table 7  | (see appended table) | P       |

| IEC 60335-2-24 |   |                      |         |
|----------------|---|----------------------|---------|
| Clause         | Requirement – Test  | Result – Remark      | Verdict |
|                | Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified.....:   |                      | P       |
|                | No breakdown during the tests   |                      | P       |
|                | The test voltage specified in Table 7 for reinforced insulation is applied between separate circuits for battery operation and mains supply operation (IEC 60335-2-24:2010) |                      | N/A     |
|                |   |                      |         |
| <b>17</b>      | <b>OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS</b>  |                      | —       |
|                | No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use.....:  |                      | P       |
|                | Appliance supplied with 1.06 or 0.94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V).....:                      | 254,4 V              | P       |
|                | Basic insulation is not short-circuited   |                      | P       |
|                | Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in Table 3 by more than 15 K               |                      | N/A     |
|                | Temperature of the winding not exceeding the value specified in Table 8,  | (See appended table) | P       |
|                | However, limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1  |                      | N/A     |
|                |   |                      |         |
| <b>18</b>      | <b>ENDURANCE</b>  |                      | —       |
|                | Requirements and tests are specified in part 2 when necessary   |                      | N/A     |
|                |   |                      |         |
| <b>19</b>      | <b>ABNORMAL OPERATION</b>   |                      | —       |
| 19.1           | The risk of fire, mechanical damage or electric shock under abnormal or careless operation obviated   |                      | P       |
|                | Electronic circuits so designed and applied that a fault will not render the appliance unsafe   |                      | P       |
|                | Appliances incorporating heating elements subjected to the tests of 19.2 and 19.3, and  |                      | N/A     |
|                | if the appliance also has a control that limit the temperature during Clause 11 it is subjected to the test of 19.4, and  |                      | N/A     |
|                | if applicable, to the test of 19.5  |                      | N/A     |
|                | Appliances incorporating PTC heating elements are also subjected to the test of 19.6  |                      | N/A     |
|                | Appliances incorporating motors subjected to the tests of 19.7 to 19.10, as applicable  |                      | P       |

| IEC 60335-2-24 |   |  |         |
|----------------|---|--|---------|
| Clause         | Requirement – Test  | Result – Remark                                | Verdict |
|                | Appliances incorporating electronic circuits subjected to the tests of 19.11 and 19.12, as applicable   |  | P       |
|                | Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11   |  | P       |
|                | Appliances incorporating voltage selector switches subjected to the test of 19.15   |  | N/A     |
|                | Subclauses 19.2 and 19.3 do not apply to heating systems (IEC 60335-2-24:2010)  |  | P       |
|                | Motor compressors not conforming to IEC 60335-2-34 are subjected to the tests specified in IEC 60335-2-34 19.101, 19.102 and 19.104 (IEC 60335-2-24:2010)                               | Motor-compressor complying with IEC 60335-2-34 | N/A     |
|                | Fan motors of ice-cream appliances are not subject to the locked-rotor test specified in Annex AA (IEC 60335-2-24:2010)   |  | N/A     |
|                | Unless otherwise specified, the tests are continued until a non-self-resetting thermal cut-out operates, or   |  | P       |
|                | until steady conditions are established   |  | P       |
|                | If a heating element or intentionally weak part becomes open-circuited, the relevant test is repeated on a second sample  |  | N/A     |
| 19.2           | Test of appliances with heating elements with restricted heat dissipation; test voltage (V), power input of 0.85 times rated power input (W).....:                                      |  | N/A     |
| 19.3           | Test of 19.2 repeated; test voltage (V), power input of 1.24 times rated power input (W).....:  |  | N/A     |
| 19.4           | Test conditions as in Clause 11, any control limiting the temperature during tests of Clause 11 short circuited   |  | N/A     |
| 19.5           | Test of 19.4 repeated on Class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the elements sheath |  | N/A     |
|                | The test repeated with reversed polarity and the other end of the heating element connected to the sheath   |  | N/A     |
|                | The test is not carried out on appliances intended to be permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during the test of 19.4         |  | N/A     |
| 19.6           | Appliances with PTC heating elements tested at rated voltage, establishing steady conditions  |  | N/A     |

| IEC 60335-2-24 |  |                      |         |
|----------------|--|----------------------|---------|
| Clause         | Requirement – Test   | Result – Remark      | Verdict |
|                | The working voltage of the PTC heating element is increased by 5 % and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1.5 times working voltage or until the PTC heating element ruptures (V)..... : |                      | N/A     |
| 19.7           | Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque, or   | (see appended table) | P       |
|                | locking moving parts of other appliances   |                      | P       |
|                | Locked rotor, capacitors open-circuited one at a time  |                      | P       |
|                | Test repeated with capacitors short-circuited one at a time, unless  |                      | N/A     |
|                | the capacitor is of class P2 of IEC 60252-1  |                      | P       |
|                | Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed..... :   |                      | N/A     |
|                | Other appliances supplied with rated voltage for a period as specified..... :  |                      | N/A     |
|                | Winding temperatures not exceeding values specified in Table 8..... :  |                      | P       |
|                | Fan motors of ice-cream appliances are tested for 5 min (IEC 60335-2-24:2010)  |                      | N/A     |
| 19.8           | Multiphase motors operated at rated voltage with one phase disconnected  |                      | N/A     |
|                | Three-phase motor compressors operated at rated voltage with one phase disconnected, unless complying with IEC 60335-2-34 (IEC 60335-2-24:2010)  |                      | N/A     |
| 19.9           | Not applicable (IEC 60335-2-24:2010)   |                      | —       |
| 19.9           | Running overload test on appliances incorporating motors intended to be remotely or automatically controlled or liable to be operated continuously   |                      | N/A     |
|                | Motor-operated and combined appliances for which 30.2.3 is applicable and that use overload protective devices relying on electronic circuits to protect the motor windings, are also subjected to the test  |                      | N/A     |
|                | Winding temperatures not exceeding values as specified..... :  |                      | N/A     |
| 19.10          | Series motor operated at 1.3 times rated voltage for 1 min   |                      | N/A     |
|                | During the test, parts not being ejected from the appliance  |                      | N/A     |
| 19.11          | Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless   |                      | P       |
|                | they comply with the conditions specified in 19.11.1   |                      | P       |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8, unless  |                 | N/A     |
|                | restarting does not result in a hazard  |                 | N/A     |
|                | Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4                       |                 | N/A     |
|                | If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out                       |                 | P       |
|                | During and after each test the following is checked:  |                 | —       |
|                | - the temperature of the windings do not exceed the values specified in Table 8   |                 | P       |
|                | - the appliance complies with the conditions specified in 19.13   |                 | P       |
|                | - any current flowing through protective impedance not exceeding the limits specified in 8.1.4  |                 | N/A     |
|                | If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:                     |                 | —       |
|                | - the base material of the printed circuit board withstands the test of Annex E   |                 | N/A     |
|                | - any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in Clause 29                                      |                 | N/A     |
| 19.11.1        | Fault conditions a) to g) in 19.11.2 are not applied to circuits or parts of circuits meeting both of the following conditions:   |                 | —       |
|                | - the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified   |                 | P       |
|                | - the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction of other parts of the appliance does not rely on the correct functioning of the electronic circuit |                 | P       |
| 19.11.2        | Fault conditions applied one at a time, the appliance operating under conditions specified in Clause 11, but supplied at rated voltage, duration of the tests as specified:                         |                 | —       |
|                | a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in Clause 29   |                 | N/A     |
|                | b) open circuit at the terminals of any component   |                 | P       |
|                | c) short circuit of capacitors, unless  |                 | P       |
|                | they comply with IEC 60384-14   |                 | P       |
|                | d) short circuit of any two terminals of an electronic component, other than integrated circuits  |                 | P       |



| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
|                | This fault condition is not applied between the two circuits of an optocoupler   |                 | P       |
|                | e) failure of triacs in the diode mode   |                 | N/A     |
|                | f) failure of microprocessors and integrated circuits  |                 | N/A     |
|                | g) failure of an electronic power switching device   |                 | N/A     |
|                | Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made   |                 | P       |
| 19.11.3        | If the appliance incorporates a protective electronic circuit which operates to ensure compliance with Clause 19, the relevant test is repeated with a single fault simulated, as indicated in a) to f) of 19.11.2 |                 | N/A     |
| 19.11.4        | Appliances having a device with an off position obtained by electronic disconnection, or   |                 | N/A     |
|                | a device that can be placed in the stand-by mode,  |                 | N/A     |
|                | subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode   |                 | N/A     |
|                | Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated, except that           |                 | N/A     |
|                | appliances operated for 30 s or 5 min during the test of 19.7 are not subjected to the tests for electromagnetic phenomena.  |                 | N/A     |
|                | Surge protective devices disconnected, unless  |                 | N/A     |
|                | They incorporate spark gaps  |                 | N/A     |
| 19.11.4.1      | The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4  |                 | N/A     |
| 19.11.4.2      | The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, test level 3   |                 | N/A     |
| 19.11.4.3      | The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified   |                 | N/A     |
| 19.11.4.4      | The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5, test level 3 or 4 as specified   |                 | N/A     |
|                | An open circuit test voltage of 2 kV is applicable for the line-to-line coupling mode  |                 | N/A     |
|                | An open circuit test voltage of 4 kV is applicable for the line-to-earth coupling  |                 | N/A     |
|                | Earthed heating elements in class I appliances disconnected  |                 | N/A     |

| IEC 60335-2-24 |  |   |         |
|----------------|--|---|---------|
| Clause         | Requirement – Test   | Result – Remark                                   | Verdict |
| 19.11.4.5      | The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3   |   | N/A     |
| 19.11.4.6      | Appliances having a rated current not exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11   |   | N/A     |
|                | Appliances having a rated current exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-34   |   | N/A     |
| 19.11.4.7      | The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2  |   | N/A     |
| 19.11.4.8      | The appliance is supplied at rated voltage and operated under normal operation. After 60 s the power supply is reduced to a level such that the appliance ceases to respond or parts controlled by the programmable component cease to operate   |   | N/A     |
|                | The appliance continues to operate normally, or  |   | N/A     |
|                | requires a manual operation to restart   |   | N/A     |
| 19.12          | If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); rated current of the fuse-link (A)..... : | Rated current: 3,15 A<br>Measured current: 10,4 A | P       |
| 19.13          | During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts   |   | P       |
|                | Temperature rises not exceeding the values shown in Table 9:   | (see appended table)                              | P       |
|                | Compliance with Clause 8 not impaired  |   | P       |
|                | If the appliance can still be operated it complies with 20.2   |   | N/A     |
|                | Insulation, other than of class III appliances or class III constructions that do not contain live parts, withstands the electric strength test of 16.3, the test voltage as specified in Table 4:   |   | —       |
|                | - basic insulation (V).....:   | 1000  | P       |
|                | - supplementary insulation (V).....:   |   | N/A     |
|                | - reinforced insulation (V)..... :   | 3000  | P       |
|                | Temperature rises not exceeding the values shown in Table 7 or 150 °C for housing of motor-compressors (IEC 60335-2-24:2010)   |   | N/A     |
|                | After operation or interruption of a control, clearances and creepage distances across the functional insulation withstand the electric strength test of 16.3, the test voltage being twice the working voltage  |   | N/A     |
|                | The appliance does not undergo a dangerous malfunction, and  |   | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | no failure of protective electronic circuits, if the appliance is still operable  |                 | N/A     |
|                | Appliances tested with an electronic switch in the off position, or in the stand-by mode:   |                 | —       |
|                | - do not become operational, or   |                 | N/A     |
|                | - if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4   |                 | N/A     |
|                | If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that:   |                 | —       |
|                | - the lid or door does not move automatically to an open position when the interlock is released, and   |                 | N/A     |
|                | - the appliance does not start after the cycle in which the interlock was released  |                 | N/A     |
|                | The temperature of the housing of motor-compressors other than those which comply with IEC 60335-2-34 is determined at the end of the test period and shall not exceed 150 °C (IEC 60335-2-24:2010) |                 | N/A     |
| 19.14          | Appliances operated under the conditions of Clause 11, any contactor or relay contact operating under the conditions of Clause 11 being short-circuited   |                 | P       |
|                | For a relay or contactor with more than one contact, all contacts are short-circuited at the same time  |                 | N/A     |
|                | A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited  |                 | N/A     |
|                | If more than one relay or contactor operates in Clause 11, they are short-circuited in turn   |                 | N/A     |
| 19.15          | For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied                                       |                 | N/A     |
| 19.101         | Heating systems dimensioned and located properly and comply with 19.13 during and after the test (IEC 60335-2-24:2010)  |                 | N/A     |
| 19.102         | Ice-makers and ice-cream appliances so constructed that they do not cause any risk and comply with 19.13 during and after the tests (IEC 60335-2-24:2010)   |                 | N/A     |
| 19.103         | Appliances intended for camping and similar use tested on an inclined support (5 °) and comply with 19.13 during and after the test (IEC 60335-2-24:2010)   |                 | N/A     |
| 19.104         | Illuminating equipment shall not cause a fire hazard under abnormal operating conditions (IEC 60335-2-24:2010)  |                 | N/A     |
|                | Test as specified (IEC 60335-2-24:2010)   |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | Illuminating equipment having discharge lamps is operated under the fault conditions specified in items a), d) and e) of 12.5.1 of IEC 60598-1, the appliance being supplied at rated voltage until temperature stabilisation of the measured parts (IEC 60335-2-24:2010) |                 | N/A     |
|                | During and after the test, the appliance shall comply with 19.13 (IEC 60335-2-24:2010)  |                 | N/A     |
|                | The temperature of ballast windings and their associated wiring shall not exceed the values specified in 12.5 of IEC 60598-1 when measured under the conditions specified (IEC 60335-2-24:2010)   |                 | N/A     |
| 19.105         | Appliances intended for battery operation properly constructed and comply with 19.13 during and after the test (IEC 60335-2-24:2010)  |                 | N/A     |
|                |   |                 |         |
| <b>20</b>      | <b>STABILITY AND MECHANICAL HAZARDS</b>   |                 | —       |
| 20.1           | Appliances having adequate stability  |                 | N/A     |
|                | Tilting test through an angle of 10 °, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn   |                 | N/A     |
|                | Tilting test repeated on appliances with heating elements, angle of inclination increased to 15 °   |                 | N/A     |
|                | Possible heating test in overturned position; temperature rise does not exceed values shown in Table 9  |                 | N/A     |
|                | Ice-cream appliances shall have adequate stability (IEC 60335-2-24:2010)  |                 | N/A     |
| 20.2           | Moving parts adequately arranged or enclosed as to provide protection against personal injury   |                 | P       |
|                | Protective enclosures, guards and similar parts are non-detachable, and   |                 | P       |
|                | have adequate mechanical strength   |                 | P       |
|                | Enclosures that can be opened by overriding an interlock are considered to be detachable parts  |                 | P       |
|                | Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard by unexpected closure   |                 | N/A     |
|                | Not possible to touch dangerous moving parts with the test probe described  |                 | P       |
| 20.101         | Refrigeration appliances and ice-makers shall have adequate stability.<br>Tests according to 20.102, 20.103 and 20.104 (IEC 60335-2-24:2010)  |                 | P       |
|                | This requirement does not apply to built-in appliances (IEC 60335-2-24:2010)  |                 | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
| 20.102         | Tests with weights as described  |                 | N/A     |
|                | Test with door opened to 90 °<br>(IEC 60335-2-24:2010)   |                 | N/A     |
|                | Test with door opened to 180 ° or to the limit of door stop (IEC 60335-2-24:2010)  |                 | N/A     |
| 20.103         | Test with one of the drawers is pulled to the most onerous out position (IEC 60335-2-24:2010)  |                 | N/A     |
|                | Test with two drawers are pulled to the most onerous out position (IEC 60335-2-24:2010)  |                 | N/A     |
| 20.104         | Test with sliding drawers accessible without opening a door (IEC 60335-2-24:2010)  |                 | N/A     |
|                | Doors shelves are loaded as specified in 20.102 and opened 90 ° (IEC 60335-2-24:2010)  |                 | N/A     |
|                |  |                 |         |
| <b>21</b>      | <b>MECHANICAL STRENGTH</b>   |                 | —       |
| 21.1           | Appliance has adequate mechanical strength and is constructed as to withstand rough handling   |                 | P       |
|                | Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0.5 J |                 | P       |
|                | The appliance shows no damage impairing compliance with this standard, and   |                 | P       |
|                | compliance with 8.1, 15.1 and Clause 29 not impaired   |                 | P       |
|                | If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3   |                 | N/A     |
|                | If necessary, repetition of groups of three blows on a new sample  |                 | N/A     |
|                | Covers of lamps within the appliance are considered likely to be damaged in normal use. Lamps are not tested (IEC 60335-2-24:2010)   |                 | N/A     |
| 21.2           | Accessible parts of solid insulation having strength to prevent penetration by sharp implements  |                 | P       |
|                | Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm  |                 | P       |
|                | The insulation is tested as specified, and does withstand the electric strength test of 16.3   |                 | N/A     |
| 21.101         | Appliances for camping or similar use tested against the effects of dropping and vibration as specified (IEC 60335-2-24:2010)  |                 | N/A     |
| 21.102         | Lamps are protected against mechanical shocks (IEC 60335-2-24:2010)  |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| <b>22</b>      | <b>CONSTRUCTION</b>   |                 | —       |
| 22.1           | Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled  | IPX0            | N/A     |
| 22.2           | Stationary appliance: means to ensure all-pole disconnection from the supply being provided:  |                 | —       |
|                | - a supply cord fitted with a plug, or  |                 | N/A     |
|                | - a switch complying with 24.3, or  |                 | N/A     |
|                | - a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided, or  |                 | N/A     |
|                | - an appliance inlet  |                 | P       |
|                | Singe-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor                     |                 | N/A     |
| 22.3           | Appliance provided with pins: no undue strain on socket-outlets   |                 | N/A     |
|                | Applied torque not exceeding 0.25 Nm  |                 | N/A     |
|                | Pull force of 50 N to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1 mm  |                 | N/A     |
|                | Each pin subjected to a torque of 0.4 Nm; the pins are not rotating, unless   |                 | N/A     |
|                | rotating does not impair compliance with this standard  |                 | N/A     |
| 22.4           | Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets  |                 | N/A     |
| 22.5           | No risk of electric shock when touching the pins of the plug, for appliances having a capacitor with rated capacitance exceeding 0,1 $\mu$ F, the appliance being disconnected from the supply at the instant of voltage peak |                 | P       |
|                | Voltage not exceeding 34 V (V).....:  | 13,7 V          | P       |
|                | If compliance relies on the operation of an electronic circuit, the electromagnetic phenomena tests of 19.11.4.3 and 19.11.4.4 are applied  |                 | N/A     |
|                | The discharge test is then repeated three times, voltage not exceeding 34 V (V)..... :  |                 | N/A     |
| 22.6           | Electrical insulation not affected by condensing water or leaking liquid  |                 | P       |
|                | Electrical insulation of Class II appliances not affected in case of a hose rupture or seal leak  |                 | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
|                | In case of doubt, test as described  |                 | P       |
|                | Thermostats are not in contact with the evaporator unless they are adequately protected (IEC 60335-2-24:2010)  |                 | P       |
|                | Fluids don't flow along parts such as stems and tubes of thermostats (IEC 60335-2-24:2010)   |                 | P       |
| 22.7           | Compression-type appliances, including protective enclosures of a protected cooling system, using flammable refrigerants shall withstand (IEC 60335-2-24:2010)                         |                 | —       |
|                | - a pressure of 3.5 times the saturated vapour pressure (70 °C)  |                 | N/A     |
|                | - a pressure of 5 times the saturated vapour pressure (20 °C)  |                 | N/A     |
|                | Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices  |                 | N/A     |
| 22.8           | Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use |                 | N/A     |
| 22.9           | Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless   |                 | P       |
|                | the substance has adequate insulating properties   |                 | N/A     |
| 22.10          | Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:                  |                 | N/A     |
|                | - a non-self-resetting thermal cut-out is required by the standard, and  |                 | N/A     |
|                | - a voltage maintained non-self-resetting thermal cut-out is used to meet it   |                 | N/A     |
|                | Non-self-resetting thermal motor protectors have a trip-free action, unless  |                 | N/A     |
|                | they are voltage maintained  |                 | N/A     |
|                | Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely   |                 | N/A     |
| 22.11          | Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts                                  |                 | P       |
|                | Obvious locked position of snap-in devices used for fixing such parts  |                 | P       |
|                | No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing  |                 | P       |
|                | Tests as described   |                 | P       |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| 22.12          | Handles, knobs etc. fixed in a reliable manner  |                 | P       |
|                | Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible  |                 | P       |
|                | Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied  |                 | N/A     |
|                | Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied  |                 | P       |
| 22.13          | Unlikely that handles, when gripped as in normal use, make the operators hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only |                 | P       |
| 22.14          | No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance   |                 | P       |
|                | No exposed pointed ends of self-tapping screws or other fasteners, likely to be touched by the user in normal use or during user maintenance  |                 | P       |
| 22.15          | Storage hooks and the like for flexible cords smooth and well rounded   |                 | N/A     |
| 22.16          | Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands and no undue wear of contacts  |                 | N/A     |
|                | Cord reel tested with 6'000 operations, as specified  |                 | N/A     |
|                | Electric strength test of 16.3, voltage of 1'000 V applied  |                 | N/A     |
| 22.17          | Spacers not removable from the outside by hand or by means of a screwdriver or a spanner  |                 | N/A     |
|                | Not applicable to refrigeration appliances and ice-makers (IEC 60335-2-24:2010)   |                 | —       |
| 22.18          | Current-carrying parts and other metal parts resistant to corrosion   |                 | P       |
| 22.19          | Driving belts not relied upon to provide the required level of insulation, unless   |                 | N/A     |
|                | constructed to prevent inappropriate replacement  |                 | N/A     |
| 22.20          | Direct contact between live parts and thermal insulation effectively prevented, unless  |                 | P       |
|                | material used is non-corrosive, non-hygroscopic and non-combustible   |                 | P       |
| 22.21          | Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless   | Not used        | N/A     |
|                | impregnated   |                 | N/A     |
|                | This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements  |                 | N/A     |
| 22.22          | Appliances not containing asbestos  | Not used        | P       |



| IEC 60335-2-24 |  |                          |         |
|----------------|--|--------------------------|---------|
| Clause         | Requirement – Test   | Result – Remark          | Verdict |
| 22.23          | Oils containing polychlorinated biphenyl (PCB) not used  | Not used                 | P       |
| 22.24          | Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported  | No bare heating elements | N/A     |
|                | In case of rupture, the heating conductor is unlikely to come in contact with accessible metal parts   |                          | N/A     |
| 22.25          | Sagging heating conductors, except in class III appliances or class III constructions that do not contain live parts, cannot come into contact with accessible metal parts             |                          | N/A     |
| 22.26          | For class III constructions the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation |                          | N/A     |
| 22.27          | Parts connected by protective impedance separated by double or reinforced insulation   |                          | N/A     |
| 22.28          | Metal parts of Class II appliances conductively connected to gas pipes or in contact with water: separated from live parts by double or reinforced insulation                          |                          | N/A     |
| 22.29          | Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation                             |                          | N/A     |
| 22.30          | Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or   |                          | P       |
|                | so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete                   |                          | P       |
| 22.31          | Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values specified in Clause 29 as a result of wear                                 |                          | P       |
|                | Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws etc. become loose                 |                          | P       |
| 22.32          | Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in Clause 29              |                          | P       |
|                | Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2     |                          | N/A     |
|                | Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation   |                          | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | Ceramic and similar porous material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation  |                 | N/A     |
|                | Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature   |                 | N/A     |
| 22.33          | Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts   |                 | P       |
|                | unearthed metal parts separated from live parts by basic insulation only  |                 | N/A     |
|                | Electrodes not used for heating liquids   |                 | N/A     |
|                | For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts, not in direct contact with basic or reinforced insulation, unless                                    |                 | P       |
|                | the reinforced insulation consists of at least 3 layers   |                 | N/A     |
|                | For class II constructions, conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation, unless   |                 | P       |
|                | the reinforced insulation consists of at least 3 layers   |                 | N/A     |
|                | An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid  |                 | N/A     |
|                | Heating conductors having only one layer of insulation are not in direct contact with water or ice during normal use (IEC 60335-2-24:2010)  |                 | N/A     |
|                | NOTE : Frozen water is regarded as a conducting liquid (IEC 60335-2-24:2010)  |                 | P       |
| 22.34          | Shafts of operating knobs, handles, levers etc. not live, unless  |                 | P       |
|                | the shaft is not accessible when the part is removed  |                 | N/A     |
| 22.35          | For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation  |                 | P       |
|                | Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation |                 | N/A     |
|                | This requirement does not apply to handles, levers and knobs on stationary appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal                     |                 | N/A     |

| IEC 60335-2-24 |  |                               |         |
|----------------|--|-------------------------------|---------|
| Clause         | Requirement – Test   | Result – Remark               | Verdict |
|                | Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation   |                               | N/A     |
| 22.36          | For appliances other than class III, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless  |                               | N/A     |
|                | they are separated from live parts by double or reinforced insulation  |                               | N/A     |
| 22.37          | Capacitors in Class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless  |                               | N/A     |
|                | the capacitors comply with 22.42   |                               | N/A     |
| 22.38          | Capacitors not connected between the contacts of a thermal cut-out   |                               | P       |
| 22.39          | Lamp holders used only for the connection of lamps   |                               | N/A     |
| 22.40          | Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible                        |                               | N/A     |
|                | If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible |                               | N/A     |
| 22.41          | No components, other than lamps, containing mercury  | Appliance not contain mercury | N/A     |
| 22.42          | Protective impedance consisting of at least two separate components  | No protective impedance       | N/A     |
|                | Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited  |                               | N/A     |
|                | Resistors checked by the test of 14.1 a) in IEC 60065  |                               | N/A     |
|                | Capacitors checked by the tests for class Y capacitors in IEC 60384-14   |                               | N/A     |
| 22.43          | Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur  |                               | N/A     |
| 22.44          | Appliances not having an enclosure that is shaped or decorated like a toy  |                               | P       |
| 22.45          | When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure  |                               | P       |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| 22.46          | For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in Table R.1                          |                 | N/A     |
|                | Software that contains measures to control the fault/error conditions specified in Table R.2 is to be specified in parts 2 for particular constructions or to address specific hazards                  |                 | N/A     |
|                | These requirements are not applicable to software used for functional purpose or compliance with Clause 11  |                 | N/A     |
| 22.47          | Appliances connected to the water mains withstand the water pressure expected in normal use   |                 | P       |
|                | No leakage from any part, including any inlet water hose  |                 | P       |
| 22.48          | Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water   |                 | P       |
| 22.49          | For remote operation, the duration of operation is to be set before the appliance can be started, unless  |                 | N/A     |
|                | the appliance switches off automatically or can operate continuously without hazard   |                 | N/A     |
| 22.50          | Controls incorporated in the appliance take priority over controls actuated by remote operation   |                 | N/A     |
| 22.51          | There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode   |                 | N/A     |
|                | There is a visual indication showing that the appliance is adjusted for remote operation  |                 | N/A     |
|                | These requirements not necessary on appliances that can operate as follows, without giving rise to a hazard:  |                 | —       |
|                | - continuously, or  |                 | N/A     |
|                | - automatically, or   |                 | N/A     |
|                | - remotely  |                 | N/A     |
| 22.52          | Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold  |                 | N/A     |
| 22.53          | Class II appliances and class III appliances that incorporate functionally earthed parts have at least double insulation or reinforced insulation between live parts and the functionally earthed parts |                 | N/A     |
| 22.54          | Button cells and batteries designated R1 not accessible without the aid of a tool, unless   |                 | N/A     |
|                | the cover of their compartment can only be opened after at least two independent movements have been applied simultaneously   |                 | N/A     |
| 22.101         | Lampholders properly fixed<br>(IEC 60335-2-24:2010)   |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | NOTE: Normal use includes replacement of lamps (IEC 60335-2-24:2010)  |                 | N/A     |
|                | Test with torque of (IEC 60335-2-24:2010):  |                 | N/A     |
|                | Lampholders for a fluorescent lamp shall comply with the test of 4.4.4 i) in IEC 60598-1 (IEC 60335-2-24:2010)  |                 | N/A     |
| 22.102         | Insulated wire heaters and their joints protected against entry of water (IEC 60335-2-24:2010)  |                 | N/A     |
|                | 3 heating elements: 24 h immersion in water with 1 % NaCl; electric strength test between heating conductor and water (1'250 V, 15 min) (IEC 60335-2-24:2010)   |                 | N/A     |
| 22.103         | Appliances employing a transcritical refrigeration system shall in the high pressure side of the refrigeration system include a pressure relief device on the compressor or between the compressor and the gas cooler. There shall be no shut off devices or other components except piping between the compressor and the pressure relief device, which could introduce a pressure drop. (IEC 60335-2-24:2010) |                 | N/A     |
|                | Pressure relief device installed as described (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Test of pressure relief device as described (IEC 60335-2-24:2010)   |                 | N/A     |
| 22.104         | Appliances with two or more temperature control devices controlling the same motor-compressor don't cause undue operation of the thermal motor-protector (IEC 60335-2-24:2010)  |                 | N/A     |
|                | The test is carried out separately with each combination of control devices (IEC 60335-2-24:2010)   |                 | N/A     |
| 22.105         | Appliances which can also be battery operated, the battery circuit is insulated from live parts by double insulation or reinforced insulation (IEC 60335-2-24:2010)   |                 | N/A     |
|                | It is not possible to touch live parts when making the connections to the battery (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Specified for double insulation or reinforced insulation (IEC 60335-2-24:2010)  |                 | N/A     |
| 22.106         | The mass of refrigerant (flammable refrigerant) shall not exceed 150 g (IEC 60335-2-24:2010)  |                 | N/A     |
| 22.107         | Compression-type appliances with a protected cooling system and which use flammable refrigerants shall be constructed to avoid any fire or explosion hazard, in the event of leakage of the cooling system (IEC 60335-2-24:2010)  |                 | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
| 22.107.1       | A leakage is simulated at the most critical point of the cooling system (method as specified) (IEC 60335-2-24:2010)  |                 | N/A     |
|                | Measured as specified  |                 | N/A     |
|                | The measured value shall not exceed 75 % LEL of the refrigerant (Table 102) and shall not exceed 50 % LEL for a period exceeding 5 min. (IEC 60335-2-24:2010)  |                 | N/A     |
| 22.107.2       | All accessible surfaces of protected cooling system components, are scratched using the tool whose tip is shown in figure 102 (IEC 60335-2-24:2010)  |                 | N/A     |
|                | The tool is applied using the following parameters (IEC 60335-2-24:2010):  |                 | —       |
|                | - force at right angles to the surface to be tested 35 N $\pm$ 3 N   |                 | N/A     |
|                | - force parallel to the surface to be tested 250 N   |                 | N/A     |
|                | The appropriate part shall withstand the test of 22.7 reduced by 50 % (IEC 60335-2-24:2010)  |                 | N/A     |
| 22.107.3       | If aluminium having a purity of less than 99.5 % according to ISO 209 is used in a protected cooling system that is embedded in thermal insulation, a sample of the cooling system is subjected to the salt mist test of IEC 60068-2-11 for a test duration of 48 h. (IEC 60335-2-24:2010)   |                 | N/A     |
| 22.108         | Compression-type appliances with unprotected cooling systems and which use flammable refrigerants, any electrical apparatus other than non-self-resetting protective devices, shall be tested and found to comply with the requirements in Annex CC for group IIA gases or the refrigerant used (IEC 60335-2-24:2010)  |                 | N/A     |
|                | Refrigerant leakage into food storage shall not result in an explosive atmosphere outside the food storage compartment in areas where electrical apparatus are mounted, except in those areas which contain only non-self-resetting protective devices, necessary for compliance with the requirements in Annex CC for group IIA gases or the refrigerant used (IEC 60335-2-24:2010) |                 | N/A     |
|                | The measured value shall not exceed 75 % LEL of the refrigerant (Table 102) and shall not exceed 50 % LEL for a period exceeding 5 min (IEC 60335-2-24:2010)   |                 | N/A     |
| 22.109         | Compression-type appliance which use flammable refrigerants shall be constructed so that leaked refrigerant will not stagnate so as to cause a fire hazard in areas outside the food storage compartments where the appliance's electrical components, other than non-self-resetting protective devices necessary for compliance with Clause 19, are fitted (IEC 60335-2-24:2010)    |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | Unless the electrical components comply least with the requirements in Annex CC for group IIA gases or the refrigerant used (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Test: A quantity equal to 50 % $\pm$ 1.5 g of the refrigerant charge is injected into the considered area (IEC 60335-2-24:2010)   |                 | N/A     |
|                | The measured value shall not exceed 75 % LEL of the refrigerant (Table 102) and shall not exceed 50 % LEL for a period exceeding 5 min (IEC 60335-2-24:2010)  |                 | N/A     |
| 22.110         | Temperatures on surfaces be exposed to leakage of flammable refrigerants shall not exceed the ignition temperature (Table 102) reduced by 100 K (IEC 60335-2-24:2010)   |                 | N/A     |
| 22.111         | In compression-type appliances which use flammable refrigerant: Prevention from galvanic coupling in contact points between uncoated aluminium and copper pipes (or similar metals) by positive means such as the use of insulated sleeving or spacers. (IEC 60335-2-24:2010) |                 | N/A     |
| 22.112         | Doors and lids of compartments in appliances with a free space shall be capable of being opened from the inside (IEC 60335-2-24:2010)   |                 | N/A     |
|                | The door shall open before the force exceeds 70 N (IEC 60335-2-24:2010)   |                 | N/A     |
| 22.113         | Drawers which are only accessible after openings a door or lid shall not contain a free space (IEC 60335-2-24:2010)   |                 | N/A     |
| 22.114         | Drawers which are accessible without opening a door and which contain a free space shall have an opening in their rear wall and be capable of being opened from the inside (IEC 60335-2-24:2010)  |                 | N/A     |
|                | The drawers shall open before the force exceeds 70 N (IEC 60335-2-24:2010)  |                 | N/A     |
| 22.115         | Appliances for household use which contain compartments with a free space any door or drawer shall not be fitted with a self-latching lock (IEC 60335-2-24:2010)  |                 | N/A     |
|                | Key operated locks shall require two independent movements to actuate the lock or be of a type that automatically ejects the key when unlocked (IEC 60335-2-24:2010)  |                 | N/A     |
| 22.116         | Accessible glass panels with an area having any two orthogonal dimensions exceeding 75 mm shall be either made from glass that shatters into small pieces when broken or be made from glass that has enhanced mechanical strength. (IEC 60335-2-24:2010)                      |                 | N/A     |
|                | Tested as described – small pieces (IEC 60335-2-24:2010)  |                 | N/A     |



| IEC 60335-2-24 |  |                                 |         |
|----------------|--|---------------------------------|---------|
| Clause         | Requirement – Test   | Result – Remark                 | Verdict |
|                | Tested as described – glass don't brooks or cracks (IEC 60335-2-24:2010)   |                                 | N/A     |
| <b>23</b>      | <b>INTERNAL WIRING</b>   |                                 | —       |
| 23.1           | Wireways smooth and free from sharp edges  |                                 | P       |
|                | Wires protected against contact with burrs, cooling fins etc.  |                                 | P       |
|                | Wire holes in metal well rounded or provided with bushings   |                                 | P       |
|                | Wiring effectively prevented from coming into contact with moving parts  |                                 | P       |
| 23.2           | Beads etc. on live wires cannot change their position, and are not resting on sharp edges  |                                 | N/A     |
|                | Beads inside flexible metal conduits contained within an insulating sleeve   |                                 | N/A     |
| 23.3           | Electrical connections and internal conductors movable relatively to each other not exposed to undue stress                              |                                 | N/A     |
|                | Flexible metallic tubes not causing damage to insulation of conductors   |                                 | N/A     |
|                | Open-coil springs not used   |                                 | N/A     |
|                | Adequate insulating lining provided inside a coiled spring, the turns of which touch one another   |                                 | N/A     |
|                | No damage after 10'000 flexings for conductors flexed during normal use, or  |                                 | N/A     |
|                | 100 flexings for conductors flexed during user maintenance   |                                 | N/A     |
|                | Electric strength test of 16.3, 1'000 V between live parts and accessible metal parts  |                                 | N/A     |
|                | Not more than 10 % of the strands of any conductor broken, and   |                                 | N/A     |
|                | not more than 30 % for wiring supplying circuits that consume no more than 15 W  |                                 | N/A     |
|                | Open-coil springs not used.<br>NOTE : It does not apply to external conductors (IEC 60335-2-24:2010)                                     |                                 | N/A     |
| 23.4           | Bare internal wiring sufficiently rigid and fixed  |                                 | N/A     |
| 23.5           | The insulation of internal wiring subjected to the supply mains voltage withstanding the electrical stress likely to occur in normal use | Withstand the electrical stress | P       |
|                | Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or                      |                                 | P       |
|                | no breakdown when a voltage of 2'000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation          |                                 | N/A     |



| IEC 60335-2-24 |   |                            |         |
|----------------|---|----------------------------|---------|
| Clause         | Requirement – Test  | Result – Remark            | Verdict |
|                | For class II construction, the requirements for supplementary insulation and reinforced insulation apply,   |                            | P       |
|                | except that the sheath of a cord complying with IEC 60227 or IEC 60245 may provide supplementary insulation.  |                            | P       |
|                | A single layer of internal wiring insulation does not provide reinforced insulation   |                            | N/A     |
| 23.6           | Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or  |                            | P       |
|                | be such that it can only be removed by breaking or cutting  |                            | P       |
| 23.7           | The colour combination green/yellow used only for earthing conductors   | Green/yellow wire          | P       |
| 23.8           | Aluminium wires not used for internal wiring  | No aluminium wire          | P       |
| 23.9           | Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless  | No lead-tin soldering used | N/A     |
|                | the contact pressure is provided by spring terminals  |                            | N/A     |
| 23.10          | The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52) |                            | N/A     |
|                |   |                            |         |
| <b>24</b>      | <b>COMPONENTS</b>   |                            | —       |
| 24.1           | Components comply with safety requirements in relevant IEC standards  |                            | P       |
|                | List of components:   | (see appended table)       | P       |
|                | Motors not required to comply with IEC 60034-1, they are tested as part of the appliance  |                            | P       |
|                | Relays tested as part of the appliance, or  |                            | N/A     |
|                | alternatively acc. to IEC 60730-1, and meeting the additional requirements in IEC 60335-1   |                            | N/A     |
|                | The requirements of Clause 29 apply between live parts of components and accessible parts of the appliance  |                            | P       |
|                | Components can comply with the requirements for clearances and creepage distances for functional insulation in the relevant component standard  |                            | P       |
|                | 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections  |                            | P       |

| IEC 60335-2-24 |  |  |         |
|----------------|--|--|---------|
| Clause         | Requirement – Test   | Result – Remark                                | Verdict |
|                | Components that have not been previously tested to comply with the IEC standard for the relevant component are tested according to the requirements of 30.2  |  | P       |
|                | Components that have been previously tested to comply with the resistance to fire requirements in the IEC standard for the relevant component need not be retested provided the specified conditions are met   |  | P       |
|                | If these conditions are not satisfied, the component is tested as part of the appliance.   |  | P       |
|                | Power electronic converter circuits not required to comply with IEC 62477-1, they are tested as part of the appliance  |  | N/A     |
|                | If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9  |  | N/A     |
|                | For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9   |  | N/A     |
|                | Components not tested and found to comply with relevant IEC standard and components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance  |  | P       |
|                | Lampholders and starterholders that have not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard |  | N/A     |
|                | No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309   |  | N/A     |
|                | Motor-compressors are not required to be separately tested according to (IEC 60335-2-34) nor are they required to meet the requirements of (IEC 60335-2-34) if they meet the requirements of this standard (IEC 60335-2-24:2010)                           | Motor-compressor complying with IEC 60335-2-34 | N/A     |
| 24.1.1         | Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, complying with IEC 60384-14   |  | N/A     |
|                | If the capacitors have to be tested, they are tested according to Annex F  |  | N/A     |
| 24.1.2         | Transformers in associated switch mode power supplies comply with Annex BB of IEC 61558-2-16   |  | N/A     |
|                | Safety isolating transformers complying with IEC 61558-2-6   |  | P       |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | If they have to be tested, they are tested according to Annex G   |                 | N/A     |
| 24.1.3         | Switches complying with IEC 61058-1, the number of cycles of operation being at least 10'000  |                 | N/A     |
|                | If they have to be tested, they are tested according to Annex H   |                 | N/A     |
|                | If the switch operates a relay or contactor, the complete switching system is subjected to the test   |                 | N/A     |
|                | If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10'000 as specified, the complete switching system need not be tested |                 | N/A     |
|                | The number of operations for other switches (IEC 60335-2-24:2010):  |                 | —       |
|                | - quick-freeze switches:  |                 | N/A     |
|                | - manual and semi-automatic defrost switches  |                 | N/A     |
|                | - door switches   |                 | N/A     |
|                | - on/off switches   |                 | N/A     |
|                | If the switch operates a relay or contactor, the complete switching system is subjected to the test   |                 | N/A     |
|                | If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10'000 as specified, the complete switching system need not be tested |                 | N/A     |
| 24.1.4         | Automatic controls complying with IEC 60730-1 with the relevant part 2. The number of cycles of operation being at least:   |                 | —       |
|                | - thermostats: 10'000   |                 | N/A     |
|                | - temperature limiters: 1'000   |                 | N/A     |
|                | - self-resetting thermal cut-outs: 300  |                 | N/A     |
|                | - voltage maintained non-self-resetting thermal cut-outs: 1'000   |                 | N/A     |
|                | - other non-self-resetting thermal cut-outs: 30   |                 | N/A     |
|                | - timers: 3'000   |                 | N/A     |
|                | - energy regulators: 10'000   |                 | N/A     |
|                | - self-resetting thermal cut-outs which may influence the test results of 19.101 and which are not short-circuited during this test: (IEC 60335-2-24:2010)                                  |                 | N/A     |
|                | - thermostats which control the motor-compressor: (IEC 60335-2-24:2010)   |                 | N/A     |
|                | - motor-compressor starting relays: (IEC 60335-2-24:2010)   |                 | N/A     |
|                | - automatic thermal motor-protectors for motor-compressors of the hermetic and semi-hermetic type: (IEC 60335-2-24:2010)  |                 | P       |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
|                | - manual reset thermal motor-protectors for motor-compressors of the hermetic and semi-hermetic type: 50 (IEC 60335-2-24:2010)   |                 | N/A     |
|                | - other automatic thermal motor-protectors: except for fan-motors (IEC 60335-2-24:2010)  |                 | N/A     |
|                | - other manual test thermal motor protectors: (IEC 60335-2-24:2010)  |                 | N/A     |
|                | - for pressure relief devices of the bursting disc type, three separate samples of the appropriate parts of the refrigeration system are tested and the bursting disc shall operate in the same way for each sample tested (IEC 60335-2-24:2010) |                 | N/A     |
|                | - electrical pressure relief devices for automatic operation: (IEC 60335-2-24:2010)  |                 | N/A     |
|                | - electrical pressure relief devices for manual reset: (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Electrical pressure relief devices comply with IEC 60730-2-6 and with listed additional requirements (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Requirement for mechanical pressure relief devices (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Testing of pressure relief devices of the bursting disc type with the appliance if not certified (IEC 60335-2-24:2010). Marking of devices as mentioned (A1:12)  |                 | N/A     |
|                | The number of cycles for controls operating during Clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited  |                 | N/A     |
|                | Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D  |                 | N/A     |
|                | For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7                             |                 | N/A     |
|                | Thermal cut-outs of the capillary type comply with the requirements for type 2 K controls in IEC 60730-2-9   |                 | N/A     |
| 24.1.5         | Appliance couplers complying with IEC 60320-1  |                 | P       |
|                | However, for appliances classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3   |                 | N/A     |
|                | Interconnection couplers complying with IEC 60320-2-2  |                 | N/A     |
| 24.1.6         | Small lamp holders similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable  |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| 24.1.7         | For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151  |                 | N/A     |
| 24.1.8         | The relevant standard for thermal links is IEC 60691  |                 | N/A     |
|                | Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19  |                 | N/A     |
| 24.1.9         | Contactors and relays, other than motor starting relays, tested as part of the appliance  |                 | N/A     |
|                | They are also tested in accordance with Clause 17 of IEC 60730-1, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance.....:   |                 | N/A     |
| 24.2           | Appliances not fitted with:   |                 | —       |
|                | - switches or automatic controls in flexible cords  |                 | P       |
|                | - devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance   |                 | P       |
|                | - thermal cut-outs that can be reset by soldering, unless   |                 | P       |
|                | the solder has a melting point of at least 230 °C   |                 | N/A     |
| 24.3           | Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions                         |                 | N/A     |
|                | Appliances for camping or similar use (IEC 60335-2-24:2010):  |                 | N/A     |
| 24.4           | Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1 |                 | N/A     |
| 24.5           | Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance, and used accordingly  |                 | P       |
|                | Voltage across capacitors in series with a motor winding does not exceed 1.1 times rated voltage, when the appliance is supplied at 1.1 times rated voltage under minimum load  |                 | P       |
|                | For starting capacitors, the voltage across the capacitors shall not exceed 1.3 times the rated voltage of the capacitor at $1.1xU_n$ (IEC 60335-2-24:2010)   |                 | N       |

| IEC 60335-2-24 |  |  |         |
|----------------|--|--|---------|
| Clause         | Requirement – Test   | Result – Remark                                | Verdict |
| 24.6           | Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V  |  | N/A     |
|                | In addition, the motors are complying with the requirements of Annex I   |  | N/A     |
| 24.7           | Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770   |  | P       |
|                | They are supplied with the appliance   |  | P       |
|                | Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set  |  | N/A     |
| 24.8           | Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure  |  | N/A     |
|                | One or more of the following conditions are to be met:   |  | —       |
|                | - the capacitors are of class P2 according to IEC 60252-1  |  | N/A     |
|                | - the capacitors are housed within a metallic or ceramic enclosure   |  | N/A     |
|                | - the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm   |  | N/A     |
|                | - adjacent non-metallic parts within 50 mm withstand the needle-flame test of Annex E  |  | N/A     |
|                | - adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10   |  | N/A     |
| 24.101         | Lampholders shall be of the insulated type (IEC 60335-2-24:2010)   |  | N/A     |
| 24.102         | The discharge capacity of the pressure relief device shall be such that it is able to release an adequate amount of refrigerant so that the pressure during the release of the refrigerant does not increase beyond the pressure setting of the pressure relief device even if the compressor is operating (IEC 60335-2-24:2010) |  | N/A     |
| <b>25</b>      | <b>SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS</b>   |  | —       |
|                | Motor-compressors with facilities for connecting a supply cord, complying with the appropriate requirements of IEC 60335-2-34 are not subjects to the following tests (IEC 60335-2-24:2010)  | Motor-compressor complying with IEC 60335-2-34 | P       |
| 25.1           | Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:   |  | —       |
|                | - supply cord fitted with a plug, the current rating and voltage rating of the plug being not less than the corresponding ratings of its associated appliance  |  | N/A     |

| IEC 60335-2-24 |   |                         |         |
|----------------|---|-------------------------|---------|
| Clause         | Requirement – Test  | Result – Remark         | Verdict |
|                | - an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or   |                         | P       |
|                | - pins for insertion into socket-outlets  |                         | N/A     |
| 25.2           | Appliance not provided with more than one means of connection to the supply mains   |                         | N/A     |
|                | Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1'250 V for 1 min between each means of connection causes no breakdown  |                         | N/A     |
|                | Mains-operated appliances provided with not more than one means of connection to the supply unless (IEC 60335-2-24:2010)  |                         | N/A     |
|                | - the appliance consists of two or more completely independent units built together in one enclosure (IEC 60335-2-24:2010)  |                         | N/A     |
|                | - the relevant circuits are adequately insulated from each other (IEC 60335-2-24:2010)  |                         | N/A     |
|                | Appliances which can be both mains and battery operated shall be provided with a separate means for connection (IEC 60335-2-24:2010)  |                         | N/A     |
| 25.3           | Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:   |                         | —       |
|                | - a set of terminals allowing the connection of a flexible cord   | Supply cord with a plug | N/A     |
|                | - a fitted supply cord  |                         | N/A     |
|                | - a set of supply leads accommodated in a suitable compartment  |                         | N/A     |
|                | - a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support                                  |                         | N/A     |
|                | - a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support |                         | N/A     |
|                | For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support            |                         | N/A     |
| 25.4           | Cable and conduit entries, rated current of appliance not exceeding 16 A, dimensions according to Table 10 (mm):  |                         | N/A     |



| IEC 60335-2-24 |  |                   |         |
|----------------|--|-------------------|---------|
| Clause         | Requirement – Test   | Result – Remark   | Verdict |
|                | Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in Clause 29  |                   | N/A     |
| 25.5           | Method for assemble supply cord with the appliance:  |                   | —       |
|                | - type X attachment  |                   | N/A     |
|                | - type Y attachment  |                   | N/A     |
|                | - type Z attachment, if allowed in part 2  |                   | N/A     |
|                | Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords  |                   | N/A     |
|                | For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment |                   | N/A     |
| 25.6           | Plugs fitted with only one flexible cord   |                   | P       |
| 25.7           | Supply cords, other than for class III appliances, being one of the following types:   |                   | —       |
|                | - Rubber sheathed (at least 60245 IEC 53)  |                   | N/A     |
|                | - Polychloroprene sheathed (at least 60245 IEC 57)   |                   | N/A     |
|                | Appliance supply cord other than SELV power supply not lighter than (IEC 60335-2-24:2010):   |                   | P       |
|                | - Polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of Clause 11  |                   | —       |
|                | • light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg   |                   | N/A     |
|                | • ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances   | H05VV-F           | P       |
|                | - Heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords   |                   | —       |
|                | • heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg  |                   | N/A     |
|                | • heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances   |                   | N/A     |
|                | Supply cords for class III appliances adequately insulated   |                   | N/A     |
|                | Test with 500 V for 2 min for supply cords of class III appliances that contain live parts   |                   | N/A     |
| 25.8           | Nominal cross-sectional area of supply cords according to Table 11; rated current (A); cross-sectional area (mm²):   | 3×1,0/1,5 mm²     | P       |
| 25.9           | Supply cords not in contact with sharp points or edges   |                   | P       |
| 25.10          | Supply cord of class I appliances have a green/yellow core for earthing  | Class I appliance | P       |
|                | In multi-phase appliances, the colour of the neutral conductor of the supply cord is blue.   |                   | N/A     |



| IEC 60335-2-24 |   |  |         |
|----------------|---|--|---------|
| Clause         | Requirement – Test  | Result – Remark                                | Verdict |
| 25.11          | Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless   | No lead-tin soldering used                     | P       |
|                | the contact pressure is provided by spring terminals  |  | N/A     |
| 25.12          | Insulation of the supply cord not damaged when moulding the cord to part of the enclosure   | Not moulding the cord to part of the enclosure | N/A     |
| 25.13          | Inlet openings so constructed as to prevent damage to the supply cord   |  | N/A     |
|                | If the enclosure at the inlet opening is not of insulating material, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided   |  | N/A     |
|                | If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is  |  | N/A     |
|                | class 0, or   |  | N/A     |
|                | a class III appliance not containing live parts   |  | N/A     |
|                | Does not apply to flexible leads used to connected an appliance to a SELV power supply (IEC 60335-2-24:2010)  |  | N/A     |
| 25.14          | Supply cords adequately protected against excessive flexing   | Appliance not move while in operation          | N/A     |
|                | Flexing test, as described:   |  | —       |
|                | - applied force (N):  |  | N/A     |
|                | - number of flexings:   |  | N/A     |
|                | The test does not result in:  |  | —       |
|                | - short-circuit between the conductors, such that the current exceeds a value of twice the rated current  |  | N/A     |
|                | - breakage of more than 10 % of the strands of any conductor  |  | N/A     |
|                | - separation of the conductor from its terminal   |  | N/A     |
|                | - loosening of any cord guard   |  | N/A     |
|                | - damage to the cord or the cord guard  |  | N/A     |
|                | - broken strands piercing the insulation and becoming accessible  |  | N/A     |
| 25.15          | For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage |  | N/A     |
|                | The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged  |  | N/A     |
|                | Pull and torque test of supply cord:  |  | —       |
|                | - fixed appliances: pull 100 N; torque (not on automatic cord reel) (Nm).....:  |  | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | - other appliances: values shown in Table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm)..... :                  |                 | N/A     |
|                | Pull and torque test of supply cord, values shown in Table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm)..... : |                 | N/A     |
|                | Cord not damaged and max. 2 mm displacement of the cord   |                 | N/A     |
| 25.16          | Cord anchorages for type X attachments constructed and located so that:   |                 | —       |
|                | - replacement of the cord is easily possible  |                 | N/A     |
|                | - it is clear how the relief from strain and the prevention of twisting are obtained  |                 | N/A     |
|                | - they are suitable for different types of cord   |                 | N/A     |
|                | - cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless                                    |                 | N/A     |
|                | they are separated from accessible metal parts by supplementary insulation  |                 | N/A     |
|                | - the cord is not clamped by a metal screw which bears directly on the cord   |                 | N/A     |
|                | - at least one part of the cord anchorage securely fixed to the appliance, unless   |                 | N/A     |
|                | it is part of a specially prepared cord   |                 | N/A     |
|                | - screws which have to be operated when replacing the cord do not fix any other component, unless                                   |                 | N/A     |
|                | the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool                                       |                 | N/A     |
|                | - if labyrinths can be bypassed the test of 25.15 is nevertheless withstood   |                 | N/A     |
|                | - for class 0, 0I and I appliances they are of insulating material or are provided with an insulating lining, unless                |                 | N/A     |
|                | failure of the insulation of the cord does not make accessible metal parts live   |                 | N/A     |
|                | - for class II appliances they are of insulating material, or   |                 | N/A     |
|                | if of metal, they are insulated from accessible metal parts by supplementary insulation   |                 | N/A     |
|                | After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals           |                 | N/A     |
| 25.17          | Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance                                |                 | N/A     |
| 25.18          | Cord anchorages only accessible with the aid of a tool, or  |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
|                | so constructed that the cord can only be fitted with the aid of a tool  |                 | N/A     |
| 25.19          | Type X attachment, glands not used as cord anchorage in portable appliances   |                 | N/A     |
|                | Tying the cord into a knot or tying the cord with string not used   |                 | N/A     |
| 25.20          | The insulated conductors of the supply cord for type Y and Z attachment additionally insulated from accessible metal parts                                      |                 | N/A     |
| 25.21          | Space for supply cord for type X attachment or for connection of fixed wiring constructed:  |                 | —       |
|                | - to permit checking of conductors with respect to correct positioning and connection before fitting any cover  |                 | N/A     |
|                | - so there is no risk of damage to the conductors or their insulation when fitting the cover  |                 | N/A     |
|                | - for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts |                 | N/A     |
|                | 2 N test to the conductor for portable appliances; no contact with accessible metal parts   |                 | N/A     |
| 25.22          | Appliance inlet:  |                 | —       |
|                | - live parts not accessible during insertion or removal   |                 | P       |
|                | Requirement not applicable to appliance inlets complying with IEC 60320-1   |                 | P       |
|                | - connector can be inserted without difficulty  |                 | P       |
|                | - the appliance is not supported by the connector   |                 | P       |
|                | - not for cold conditions if temp. rise of external metal parts exceeds 75 K during Clause 11, unless   |                 | N/A     |
|                | the supply cord is unlikely to touch such metal parts   |                 | N/A     |
| 25.23          | Interconnection cords comply with the requirements for the supply cord, except that:  |                 | N/A     |
|                | - the cross-sectional area of the conductors is determined on the basis of the maximum current during Clause 11   |                 | N/A     |
|                | - the thickness of the insulation may be reduced  |                 | N/A     |
|                | If necessary, electric strength test of 16.3  |                 | N/A     |
|                | Interconnection cord for battery operated appliances (IEC 60335-2-24:2010)  |                 | N/A     |
| 25.24          | Interconnection cords not detachable without the aid of a tool if compliance with the standard is impaired when they are disconnected                           |                 | N/A     |

| IEC 60335-2-24 |  |  |         |
|----------------|--|--|---------|
| Clause         | Requirement – Test   | Result – Remark                                | Verdict |
| 25.25          | Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet.   |  | N/A     |
|                | Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC/TR 60083  |  | N/A     |
| 25.101         | Appliances which can be battery operated shall have suitable means for connection of the battery (IEC 60335-2-24:2010)   |  | N/A     |
|                |  |  |         |
| <b>26</b>      | <b>TERMINALS FOR EXTERNAL CONDUCTORS</b>   |  | —       |
|                | This clause of part 1 is not applicable to those parts of motor-compressors with facilities for connecting a supply cord and complying with IEC 60335-2-34 (IEC 60335-2-24:2010)                                       | Motor-compressor complying with IEC 60335-2-34 | P       |
| 26.1           | Appliances provided with terminals or equally effective devices for connection of external conductors  |  | P       |
|                | Terminals only accessible after removal of a non-detachable cover, except  |  | P       |
|                | for class III appliances that do not contain live parts  |  | N/A     |
|                | Earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection  |  | P       |
| 26.2           | Appliances with type X attachment and appliances for the connection of cables to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless                |  | N/A     |
|                | the connections are soldered   |  | N/A     |
|                | Screws and nuts not used to fix any other component, except  |  | N/A     |
|                | internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors  |  | N/A     |
|                | If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless  |  | N/A     |
|                | barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint |  | N/A     |
| 26.3           | Terminals for type X attachment and for connection to fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure and without damaging the conductor             |  | N/A     |
|                | Terminals fixed so that when the clamping means is tightened or loosened:  |  | —       |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
|                | - the terminal does not become loose   |                 | N/A     |
|                | - internal wiring is not subjected to stress   |                 | N/A     |
|                | - neither clearances nor creepage distances are reduced below the values in Clause 29  |                 | N/A     |
|                | Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified (Nm):   |                 | N/A     |
|                | No deep or sharp indentations of the conductors  |                 | N/A     |
| 26.4           | Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar, and |                 | N/A     |
|                | so constructed or placed that conductors prevented from slipping out when clamping screws or nuts are tightened  |                 | N/A     |
| 26.5           | Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard   |                 | N/A     |
|                | Stranded conductor test, 8 mm insulation removed   |                 | N/A     |
|                | No contact between live parts and accessible metal parts and,  |                 | N/A     |
|                | for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only  |                 | N/A     |
| 26.6           | Terminals for type X attachment and for connection to fixed wiring suitable for connection of conductors with required cross-sectional area according to Table 13; rated current (A); nominal cross-sectional area (mm <sup>2</sup> ):       |                 | N/A     |
|                | If a specially prepared cord is used, terminals need only be suitable for that cord  |                 | N/A     |
| 26.7           | Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure  |                 | N/A     |
| 26.8           | Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other   |                 | N/A     |
| 26.9           | Terminals of the pillar type constructed and located as specified  |                 | N/A     |
| 26.10          | Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless  |                 | P       |
|                | conductors ends fitted with means suitable for screw terminals   |                 | P       |
|                | Pull test of 5 N to the connection   |                 | P       |

| IEC 60335-2-24 |  |   |         |
|----------------|--|---|---------|
| Clause         | Requirement – Test   | Result – Remark                                       | Verdict |
| 26.11          | For type Y and Z attachment, soldered, welded, crimped or similar connections may be used  |   | N/A     |
|                | For Class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone  |   | N/A     |
|                | If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free       |   | N/A     |
|                | Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection between live parts and accessible metal parts, between battery supply terminals if any (IEC 60335-2-24:2010) |   | N/A     |
|                |  |   |         |
| <b>27</b>      | <b>PROVISION FOR EARTHING</b>  |   | —       |
|                | Compliance is not checked on parts related to motor-compressors if the motor-compressor complies with IEC 60335-2-34 (IEC 60335-2-24:2010)   | Motor-compressor complying with IEC 60335-2-34        | P       |
| 27.1           | Accessible metal parts of Class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet  |   | P       |
|                | Earthing terminals and earthing contacts not connected to the neutral terminal   |   | P       |
|                | Class 0, II and III appliances have no provision for earthing  |   | N/A     |
|                | Class II appliances and class III appliances can incorporate an earth for functional purposes  |   | N/A     |
|                | Safety extra-low voltage circuits not earthed, unless  |   | P       |
|                | protective extra-low voltage circuits  |   | N/A     |
| 27.2           | Clamping means adequately secured against accidental loosening   |   | P       |
|                | Terminals used for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm <sup>2</sup> , and  | No connection of external equipment bonding conductor | N/A     |
|                | do not provide earthing continuity between different parts of the appliance, and   |   | N/A     |
|                | conductors cannot be loosened without the aid of a tool  |   | P       |
|                | Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes  |   | N/A     |

| IEC 60335-2-24 |   |                           |         |
|----------------|---|---------------------------|---------|
| Clause         | Requirement – Test  | Result – Remark           | Verdict |
| 27.3           | For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part    | No such part              | N/A     |
|                | For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage  |                           | N/A     |
|                | Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes   |                           | N/A     |
| 27.4           | No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal  |                           | P       |
|                | Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion  |                           | P       |
|                | If of steel, these parts provided with an electroplated coating with a thickness at least 5 $\mu\text{m}$   | Announced by manufacturer | P       |
|                | Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure   |                           | P       |
|                | In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion   |                           | P       |
|                | Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes   |                           | N/A     |
| 27.5           | Low resistance of connection between earthing terminal and earthed metal parts  |                           | P       |
|                | This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance |                           | N/A     |
|                | Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes   |                           | N/A     |
|                | Resistance not exceeding 0.1 $\Omega$ at the specified low-resistance test ( $\Omega$ ).....:   | 0,025 $\Omega$            | P       |
| 27.6           | The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances.   | Stationary appliances     | N/A     |
|                | They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit                           |                           | N/A     |
|                | Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes   |                           | N/A     |

| IEC 60335-2-24 |  |   |         |
|----------------|--|---|---------|
| Clause         | Requirement – Test   | Result – Remark   | Verdict |
| <b>28</b>      | <b>SCREWS AND CONNECTIONS</b>  |   | —       |
|                | Compliance is not checked on parts related to motor-compressors if the motor-compressor complies with IEC 60335-2-34 (IEC 60335-2-24:2010)   | Motor-compressor complying with IEC 60335-2-34                          | P       |
| 28.1           | Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses  |   | P       |
|                | Screws not of soft metal liable to creep, such as zinc or aluminium  |   | P       |
|                | Diameter of screws of insulating material min. 3 mm  | No screw of insulating material   | N/A     |
|                | Screws of insulating material not used for any electrical connections or connections providing earthing continuity   | No screw of insulating material   | N/A     |
|                | Screws used for electrical connections or connections providing earthing continuity screwed into metal   |   | P       |
|                | Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation  |   | P       |
|                | For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation            |   | N/A     |
|                | For screws and nuts; torque-test as specified in Table 14..... :   | (see appended table)  | P       |
| 28.2           | Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless |   | P       |
|                | there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material   |   | N/A     |
|                | This requirement does not apply to electrical connections in circuits of appliances for which:   |   | —       |
|                | <ul style="list-style-type: none"> <li>30.2.2 is applicable and that carry a current not exceeding 0.5 A</li> </ul>  |   | N/A     |
|                | <ul style="list-style-type: none"> <li>30.2.3 is applicable and that carry a current not exceeding 0.2 A</li> </ul>  |   | P       |
| 28.3           | Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together  | Space-threaded (sheet metal) screws not used for electrical connections | N/A     |
|                | Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread   | Thread-cutting (self-tapping) screws not used electrical connections    | N/A     |



| IEC 60335-2-24 |   |                      |         |
|----------------|---|----------------------|---------|
| Clause         | Requirement – Test  | Result – Remark      | Verdict |
|                | Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer  |                      | P       |
|                | Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection: |                      | —       |
|                | - in normal use,  |                      | N/A     |
|                | - during user maintenance,  |                      | N/A     |
|                | - when replacing a supply cord having a type X attachment, or   |                      | N/A     |
|                | - during installation   |                      | N/A     |
|                | At least two screws being used for each connection providing earthing continuity, unless  |                      | N/A     |
|                | the screw forms a thread having a length of at least half the diameter of the screw   |                      | N/A     |
| 28.4           | Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity           |                      | N/A     |
|                | This requirement does not apply to screws in the earthing circuit if at least two screws are used, or   |                      | N/A     |
|                | if an alternative earthing circuit is provided  |                      | N/A     |
|                | Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion                      |                      | N/A     |
|                |   |                      |         |
| <b>29</b>      | <b>CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION</b>  |                      | —       |
|                | Clearances, creepage distances and solid insulation withstand electrical stress   |                      | P       |
|                | For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), Annex J applies..... :                     |                      | N/A     |
|                | The microenvironment is pollution degree 1 under type 1 protection  |                      | N/A     |
|                | For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3                |                      | N/A     |
|                | These values apply to functional, basic, supplementary and reinforced insulation..... :   |                      | P       |
| 29.1           | Clearances not less than the values specified in Table 16, taking into account the rated impulse voltage for the overvoltage categories of Table 15, unless..... :        | (see appended table) | P       |
|                | for basic insulation and functional insulation they comply with the impulse voltage test of Clause 14   |                      | P       |

| IEC 60335-2-24 |  |                      |         |
|----------------|--|----------------------|---------|
| Clause         | Requirement – Test   | Result – Remark      | Verdict |
|                | However, if the distances are affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1'500 V and above are increased by 0.5 mm and the impulse voltage test is not applicable  |                      | N/A     |
|                | For appliances intended for use at altitudes exceeding 2'000 m, the clearances in Table 16 is increased according to the relevant multiplier values in Table A.2 of IEC 60664-1  |                      | N/A     |
|                | Impulse voltage test is not applicable:  |                      | —       |
|                | - when the microenvironment is pollution degree 3, or  |                      | N/A     |
|                | - for basic insulation of class 0 and class 01 appliances  |                      | N/A     |
|                | - to appliances intended for use at altitudes exceeding 2'000 m  |                      | N/A     |
|                | Appliances are in overvoltage category II  |                      | P       |
|                | A force of 2 N is applied to bare conductors, other than heating elements  |                      | N/A     |
|                | A force of 30 N is applied to accessible surfaces  |                      | P       |
| 29.1.1         | Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage   |                      | P       |
|                | The values of Table 16 or the impulse voltage test of Clause 14 are applicable..... :  |                      | P       |
|                | Clearance at the terminals of tubular sheathed heating elements may be reduced to 1.0 mm if the microenvironment is pollution degree 1   |                      | N/A     |
|                | Lacquered conductors of windings considered to be bare conductors  |                      | N/A     |
| 29.1.2         | Clearances of supplementary insulation not less than those specified for basic insulation in Table 16:   | (see appended table) | P       |
| 29.1.3         | Clearances of reinforced insulation not less than those specified for basic insulation in Table 16, using the next higher step for rated impulse voltage:  | (see appended table) | P       |
|                | For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation |                      | P       |
| 29.1.4         | Clearances for functional insulation are the largest values determined from:   |                      | —       |
|                | - Table 16 based on the rated impulse voltage:   | (see appended table) | P       |
|                | - Table F.7a in IEC 60664-1, frequency not exceeding 30 kHz  |                      | N/A     |
|                | - Clause 4 of IEC 60664-4, frequency exceeding 30 kHz  |                      | N/A     |

| IEC 60335-2-24 |  |                      |         |
|----------------|--|----------------------|---------|
| Clause         | Requirement – Test   | Result – Remark      | Verdict |
|                | If values of Table 16 are largest, the impulse voltage test of Clause 14 may be applied instead, unless  |                      | N/A     |
|                | the microenvironment is pollution degree 3, or   |                      | N/A     |
|                | the distances can be affected by wear, distortion, movement of the parts or during assembly  |                      | N/A     |
|                | However, clearances are not specified if the appliance complies with Clause 19 with the functional insulation short-circuited  |                      | N/A     |
|                | Lacquered conductors of windings considered to be bare conductors  |                      | N/A     |
|                | However, clearances at crossover points are not measured   |                      | N/A     |
|                | Clearance between surfaces of PTC heating elements may be reduced to 1 mm  |                      | N/A     |
| 29.1.5         | Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:  |                      | —       |
|                | - Table 16 based on the rated impulse voltage:   | (see appended table) | N/A     |
|                | - Table F.7a in IEC 60664-1, frequency not exceeding 30 kHz  |                      | N/A     |
|                | - Clause 4 of IEC 60664-4, frequency exceeding 30 kHz  |                      | N/A     |
|                | If clearances for basic insulation are selected from Table F.7a of IEC 60664-1 or Clause 4 of IEC 60664-4, the clearances of supplementary insulation are not less than those specified for basic insulation   |                      | N/A     |
|                | If clearances for basic insulation are selected from Table F.7a of IEC 60664-1, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160 % of the withstand voltage required for basic insulation   |                      | N/A     |
|                | If clearances for basic insulation are selected from Clause 4 of IEC 60664-4, the clearances of reinforced insulation are twice the value required for basic insulation  |                      | N/A     |
|                | If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in Table 16, but using the next lower step for rated impulse voltage |                      | N/A     |
|                | Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation based on the working voltage used as the rated voltage in Table 15  |                      | N/A     |
| 29.2           | Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree:   | (see appended table) | P       |
|                | Pollution degree 2 applies, unless   |                      | N/A     |

| IEC 60335-2-24 |  |                      |         |
|----------------|--|----------------------|---------|
| Clause         | Requirement – Test   | Result – Remark      | Verdict |
|                | - precautions taken to protect the insulation; pollution degree 1  |                      | N/A     |
|                | - insulation subjected to conductive pollution; pollution degree 3   |                      | P       |
|                | A force of 2 N is applied to bare conductors, other than heating elements  |                      | N/A     |
|                | A force of 30 N is applied to accessible surfaces  |                      | P       |
|                | In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system  |                      | P       |
|                | Insulation in refrigeration appliances and ice-makers is in pollution degree 3 and shall have a CTI value of 250 unless the insulation to be protected to pollution by condensation (IEC 60335-2-24:2010). N/A for functional insulation if working voltage < 50 V (A1:12) |                      | P       |
| 29.2.1         | Creepage distances of basic insulation not less than specified in Table 17..... :  | (see appended table) | P       |
|                | However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from Table 2 of IEC 60664-4, these values being used if exceeding the values in Table 17..... :   |                      | N/A     |
|                | Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in Table 16, if the clearance has been checked according to the test of Clause 14..... :  | (see appended table) | N/A     |
| 29.2.2         | Creepage distances of reinforced insulation at least double those specified for basic insulation in Table 17, or..... :  | (see appended table) | P       |
|                | Table 2 of IEC 60664-4, as applicable..... :   |                      | N/A     |
| 29.2.3         | Creepage distances of reinforced insulation at least double those specified for basic insulation in Table 17, or..... :  | (see appended table) | P       |
|                | Table 2 of IEC 60664-4, as applicable..... :   |                      | N/A     |
| 29.2.4         | Creepage distances of functional insulation not less than specified in Table 18..... :   | (see appended table) | P       |
|                | However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from Table 2 of IEC 60664-4, these values being used if exceeding the values in Table 18..... :   |                      | N/A     |
|                | Creepage distances may be reduced if the appliance complies with Clause 19 with the functional insulation short-circuited  |                      | P       |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| 29.3           | Supplementary insulation and reinforced insulation shall have adequate thickness, or have a sufficient number of layers, to withstand the electrical stresses   |                 | P       |
|                | Compliance checked:   |                 | —       |
|                | - by measurement, in accordance with 29.3.1, or   |                 | P       |
|                | - by an electric strength test in accordance with 29.3.2, or  |                 | N/A     |
|                | - for insulation, other than single layer internal wiring insulation, by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and |                 | N/A     |
|                | for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or  |                 | N/A     |
|                | for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or  |                 | N/A     |
|                | - as specified in subclause 6.3 of IEC 60664-4 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz   |                 | N/A     |
| 29.3.1         | Supplementary insulation have a thickness of at least 1 mm  |                 | P       |
|                | Reinforced insulation have a thickness of at least 2 mm   |                 | P       |
| 29.3.2         | Each layer of material withstand the electric strength test of 16.3 for supplementary insulation  |                 | N/A     |
|                | Supplementary insulation consist of at least 2 layers   |                 | N/A     |
|                | Reinforced insulation consist of at least 3 layers  |                 | N/A     |
| 29.3.3         | The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by   |                 | N/A     |
|                | the electric strength test of 16.3  |                 | N/A     |
|                | If the temperature rise during the tests of Clause 19 does not exceed the value specified in Table 3, the test of IEC 60068-2-2 is not carried out  |                 | N/A     |
| 29.3.4         | Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in Table 19:  |                 | N/A     |
|                |   |                 |         |
| <b>30</b>      | <b>RESISTANCE TO HEAT AND FIRE</b>  |                 | —       |
| 30.1           | External parts of non-metallic material,  |                 | P       |
|                | parts supporting live parts, and  |                 | P       |
|                | parts of thermoplastic material providing supplementary or reinforced insulation,   |                 | P       |
|                | sufficiently resistant to heat  |                 | P       |

| IEC 60335-2-24 |   |  |         |
|----------------|---|--|---------|
| Clause         | Requirement – Test  | Result – Remark                                | Verdict |
|                | Ball-pressure test according to IEC 60695-10-2  | (see appended table)                           | P       |
|                | External parts tested at 40 °C plus the maximum temperature rise determined during the test of Clause 11, or at 75 °C, whichever is the higher; temperature (°C).....:                            | (see appended table)                           | P       |
|                | Parts supporting live parts tested at 40 °C plus the maximum temperature rise determined during the test of Clause 11, or at 125 °C, whichever is the higher; temperature (°C).....:              | (see appended table)                           | P       |
|                | Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during Clause 19, if higher; temperature (°C).....: |  | N/A     |
|                | Not applied to parts of motor-compressor if complies with IEC60335-2-34 (IEC 60335-2-24:2010)   | Motor-compressor complying with IEC 60335-2-34 | P       |
|                | Accessible parts within the storage compartment 65 °C (IEC 60335-2-24:2010)   |  | N/A     |
| 30.2           | Relevant parts of non-metallic material adequately resistant to ignition and spread of fire   | (see appended table)                           | P       |
|                | Not applied to parts of motor-compressor if complies with IEC60335-2-34 with no ignition (IEC 60335-2-24:2010)  |  | P       |
|                | This requirement does not apply to:   |  | —       |
|                | parts having a mass not exceeding 0.5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or    |  | N/A     |
|                | decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance   |  | N/A     |
|                | Compliance checked by the test of 30.2.1, and in addition:  |  | —       |
|                | - for attended appliances, 30.2.2 applies   |  | N/A     |
|                | - for unattended appliances, 30.2.3 applies   |  | P       |
|                | For appliances for remote operation, 30.2.3 applies   |  | N/A     |
|                | For base material of printed circuit boards, 30.2.4 applies   |  | P       |
| 30.2.1         | Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11 at 550 °C  |  | P       |
|                | However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or   |  | N/A     |
|                | the material is classified at least HB40 according to IEC 60695-11-10   |  | N/A     |
|                | Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF  |  | N/A     |

| IEC 60335-2-24 |   |                      |         |
|----------------|---|----------------------|---------|
| Clause         | Requirement – Test  | Result – Remark      | Verdict |
| 30.2.2         | Appliances operated while attended, parts of non-metallic material supporting current-carrying connections, and   |                      | N/A     |
|                | parts of non-metallic material within a distance of 3 mm of such connections,   |                      | N/A     |
|                | subjected to the glow-wire test of IEC 60695-2-11   |                      | N/A     |
|                | The test severity is:   |                      | —       |
|                | - 750 °C, for connections carrying a current exceeding 0.5 A during normal operation  |                      | N/A     |
|                | - 650 °C, for other connections   |                      | N/A     |
|                | Glow-wire applied to an interposed shielding material, if relevant  |                      | N/A     |
|                | The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least:       |                      | —       |
|                | - 750 °C, for connections carrying a current exceeding 0.5 A during normal operation  |                      | N/A     |
|                | - 650 °C, for other connections   |                      | N/A     |
|                | The glow-wire test is also not carried out on small parts. These parts are to:  |                      | —       |
|                | - comprise material having a glow-wire flammability index of at least 750 °C, or 650 °C as appropriate, or  |                      | N/A     |
|                | - comply with the needle-flame test of Annex E, or  | (see appended table) | N/A     |
|                | - comprise material classified as V-0 or V-1 according to IEC 60695-11-10..... :  |                      | N/A     |
|                | Glow-wire test not applicable to conditions as specified..... :   |                      | N/A     |
| 30.2.2         | Not applicable (IEC 60335-2-24:2010)  |                      | —       |
| 30.2.3         | Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2  |                      | P       |
|                | The tests are not applicable to conditions as specified   |                      | N/A     |
| 30.2.3.1       | Parts of insulating material supporting connections carrying a current exceeding 0.2 A during normal operation, and   |                      | P       |
|                | parts of non-metallic material, other than small parts, within a distance of 3 mm,  |                      | P       |
|                | subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850 °C  | (see appended table) | P       |
|                | Glow-wire applied to an interposed shielding material, if relevant  |                      | P       |
|                | The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C |                      | P       |

| IEC 60335-2-24 |  |                      |         |
|----------------|--|----------------------|---------|
| Clause         | Requirement – Test   | Result – Remark      | Verdict |
| 30.2.3.2       | Parts of insulating material supporting current-carrying connections, and  |                      | P       |
|                | parts of non-metallic material, within a distance of 3 mm,   |                      | P       |
|                | subjected to glow-wire test of IEC 60695-2-11  | (see appended table) | P       |
|                | The test severity is:  |                      | —       |
|                | - 750 °C, for connections carrying a current exceeding 0.2 A during normal operation   |                      | P       |
|                | - 650 °C, for other connections  |                      | P       |
|                | Glow-wire applied to an interposed shielding material, if relevant   |                      | N/A     |
|                | However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:  |                      | —       |
|                | - a glow-wire ignition temperature according to IEC 60695-2-13 of at least:  |                      | —       |
|                | • 775 °C, for connections carrying a current exceeding 0.2 A during normal operation   |                      | N/A     |
|                | • 675 °C, for other connections  |                      | N/A     |
|                | - a glow-wire flammability index according to IEC 60695-2-12 of at least:  |                      | —       |
|                | • 750 °C, for connections carrying a current exceeding 0.2 A during normal operation   |                      | N/A     |
|                | • 650 °C, for other connections  |                      | N/A     |
|                | The glow-wire test is also not carried out on small parts. These parts are to:   |                      | —       |
|                | - comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or  |                      | N/A     |
|                | - comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or  |                      | N/A     |
|                | - comply with the needle-flame test of Annex E, or   |                      | N/A     |
|                | - comprise material classified as V-0 or V-1 according to IEC 60695-11-10  |                      | N/A     |
|                | The consequential needle-flame test of Annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those |                      | —       |
|                | - parts that withstood the glow-wire test of IEC 60695-2-11 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or   |                      | P       |
|                | - parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or  |                      | N/A     |
|                | - small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or   |                      | N/A     |



| IEC 60335-2-24 |  |                      |         |
|----------------|--|----------------------|---------|
| Clause         | Requirement – Test   | Result – Remark      | Verdict |
|                | - small parts for which the needle-flame test of Annex E was applied, or   |                      | N/A     |
|                | - small parts for which a material classification of V-0 or V-1 was applied  |                      | N/A     |
|                | However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:                      |                      | —       |
|                | - parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or  |                      | N/A     |
|                | - parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or  |                      | N/A     |
|                | - parts shielded by a flame barrier that meets the needle-flame test of Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10 |                      | N/A     |
| 30.2.4         | Base material of printed circuit boards subjected to needle-flame test (NFT) of annex E  |                      | P       |
|                | Test not applicable to conditions as specified   |                      | N/A     |
|                |  |                      |         |
| 31             | RESISTANCE TO RUSTING  |                      | —       |
|                | Relevant ferrous parts adequately protected against rusting  |                      | P       |
|                | Tests specified in part 2 when necessary   |                      | P       |
|                |  |                      |         |
| 32             | RADIATION, TOXICITY AND SIMILAR HAZARDS  |                      | —       |
|                | Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use  |                      | N/A     |
|                | Compliance is checked by the limits or tests specified in part 2, if relevant  |                      | N/A     |
|                | Not applicable (IEC 60335-2-24:2010)   |                      | —       |
|                |  |                      |         |
| A              | ANNEX A (INFORMATIVE)<br>ROUTINE TESTS   |                      | —       |
|                | Description of routine tests to be carried out by the manufacturer   |                      | N/A     |
|                |  |                      |         |
| AA             | ANNEX AA, (NORMATIVE) LOCKED-ROTOR TEST OF FAN MOTORS<br>(IEC 60335-2-24:2010)   |                      | —       |
|                | The winding of a fan motor does not reach excessive temperatures if the motor locks or fails to start  | (see appended table) | P       |
|                | The motor is supplied at rated voltage according to supply circuit fig. AA.1.  |                      | P       |
|                | Tests as described   |                      | P       |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| <b>B</b>       | <b>ANNEX B (NORMATIVE)<br/>APPLIANCES POWERED BY RECHARGEABLE BATTERIES</b>   |                 | —       |
|                | Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use   |                 | N/A     |
|                | Three forms of construction covered:  |                 | —       |
|                | a) Appliance supplied directly from the supply mains or a renewable energy source, the battery charging circuitry and other supply unit circuitry incorporated within the appliance   |                 | N/A     |
|                | b) The part of the appliance incorporating the battery is supplied from the supply mains or a renewable energy source, via a detachable supply unit. The battery charging circuitry is incorporated within the part of the appliance containing the battery |                 | N/A     |
|                | c) The part of the appliance incorporating the battery is supplied from the supply mains or a renewable energy source, via a detachable supply unit. The battery charging circuitry is incorporated within the detachable supply unit                       |                 | N/A     |
| 3.1.9          | Appliance operated under the following conditions:  |                 | —       |
|                | - the appliance, supplied by its fully charged battery, operated as specified in relevant part 2  |                 | N/A     |
|                | - the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate  |                 | N/A     |
|                | -if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2            |                 | N/A     |
|                | - if the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed  |                 | N/A     |
| 3.6.2          | Part to be removed in order to discard the battery is not considered to be detachable   |                 | N/A     |
| 5.B.101        | Appliances supplied from the supply mains tested as specified for motor-operated appliances   |                 | N/A     |
| 7.1            | Battery compartment for batteries intended to be replaced by the user, marked with battery voltage (V) and polarity of the terminals :  |                 | N/A     |
|                | The positive terminal indicated by symbol IEC 60417-5005 and the negative terminal by symbol IEC 60417-5006   |                 | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
|                | Appliances intending to be supplied from a detachable supply unit marked with symbol IEC 60417-6181 and its type reference along with symbol ISO 7000-0790 (2004-01), or                               |                 | N/A     |
|                | use only with <model designation> supply unit :  |                 | N/A     |
| 7.6            | Additional symbols   |                 | N/A     |
| 7.12           | The instructions give information regarding charging   |                 | N/A     |
|                | The instructions for appliances incorporating batteries intended to be replaced by the user includes required information  |                 | N/A     |
|                | Details about how to remove batteries containing materials hazardous to the environment given  |                 | N/A     |
|                | For appliances intending to be supplied from a detachable supply unit for the purposes of recharging the battery, the type reference of the detachable supply unit is stated along with the following: |                 | —       |
|                | WARNING: For the purposes of recharging the battery, only use the detachable supply unit provided with this appliance  |                 | N/A     |
|                | If the symbol for detachable supply unit is used, its meaning is explained   |                 | N/A     |
| 7.15           | Markings placed on the part of the appliance connected to the supply mains   |                 | N/A     |
|                | The type reference of the detachable supply unit is placed in close proximity to the symbol  |                 | N/A     |
| 8.2            | Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment          |                 | N/A     |
|                | If the appliance can be operated without batteries, double or reinforced insulation required   |                 | N/A     |
| 11.7           | The battery is charged for the period stated in the instructions or 24 h :   |                 | N/A     |
| 11.8           | Temperature rise of the battery surface does not exceed the limit in the battery manufacturer's specification; measured (K); limit (K) :   |                 | N/A     |
|                | If no limit specified, the temperature rise does not exceed 20 K; measured (K) :   |                 | N/A     |
| 19.1           | Appliances subjected to tests of 19.B.101, 19.B.102 and 19.B.103   |                 | N/A     |
| 19.10          | Not applicable   |                 | N/A     |
| 19.B.101       | Appliances supplied at rated voltage for 168 h, the battery being continually charged  |                 | N/A     |
| 19.B.102       | For appliances having batteries that can be removed without the aid of a tool, short-circuit of the terminals of the battery, the battery being fully charged,   |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| 19.B.103       | Appliances having batteries replaceable by the user supplied at rated voltage under normal operation with the battery removed or in any position allowed by the construction              |                 | N/A     |
| 19.13          | The battery does not rupture or ignite  |                 | N/A     |
| 21.B.101       | Appliances having pins for insertion into socket-outlets have adequate mechanical strength  |                 | N/A     |
|                | Part of the appliance incorporating the pins subjected to the free fall test, procedure 2, of IEC 60068-2-31, the number of falls being:  |                 | —       |
|                | - 100, if the mass of the part does not exceed 250 g (g) :  |                 | N/A     |
|                | - 50, if the mass of the part exceeds 250 g :   |                 | N/A     |
|                | After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met   |                 | N/A     |
| 22.3           | Appliances having pins for insertion into socket-outlets tested as fully assembled as possible  |                 | N/A     |
| 25.13          | An additional lining or bushing not required for interconnection cords in class III appliances or class III constructions operating at safety extra-low voltage not containing live parts |                 | N/A     |
| 30.2           | For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies   |                 | N/A     |
|                | For other parts, 30.2.2 applies   |                 | N/A     |
|                |   |                 |         |
| <b>C</b>       | <b>ANNEX C (NORMATIVE)<br/>AGEING TEST ON MOTORS</b>  |                 | —       |
|                | Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding  |                 | N/A     |
|                | Test conditions as specified  |                 | N/A     |
|                | This annex does not apply to motor-compressors (IEC 60335-2-24:2010)  |                 | N/A     |
|                |   |                 |         |
| <b>CC</b>      | <b>ANNEX CC (NORMATIVE)<br/>NON-SPARKING “N” ELECTRICAL APPARATUS</b>   |                 | —       |
|                | Where reference is made to IEC 60079-15, the following clauses are applicable as modified below (IEC 60335-2-24:2010)   |                 | —       |
| 11             | Supplementary requirements for non-sparking luminaires (A1:12)  |                 | —       |
|                | All of subclauses of Clause 11 are applicable, except 11.2.4.1, 11.2.4.5, 11.2.5, 11.2.6, 11.2.7, 11.3.4, 11.3.5, 11.3.6 and 11.4 (A1:12)   |                 | N/A     |
| 16             | General supplementary requirements for apparatus producing arcs, sparks or hot surfaces (A1:12)   |                 | N/A     |
| 17             | Supplementary requirements for enclosed-break devices and non-incendive components producing arcs, sparks or hot surfaces (A1:12)   |                 | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
| 18             | Supplementary requirements for hermetically sealed devices producing arcs, sparks or hot surfaces (A1:12)                                  |                 | N/A     |
| 19             | Supplementary requirements for sealed devices producing arcs, sparks or hot surfaces (A1:12)   |                 | —       |
|                | All of the subclauses of Clause 19 are applicable, except 19.1 and 19.6, which are replaced by the following (A1:12)                       |                 | N/A     |
| 19.1           | Non-metallic materials (A1:12)   |                 | —       |
|                | Seals are tested using 22.5. However if the device is tested in the appliance, then 22.5.1 and 22.5.2 are not applicable (A1:12)           |                 | N/A     |
|                | After the tests of Clause 19 in IEC 60335-2-24, by inspection, no damage that could impair the type of protection shall be evident (A1:12) |                 | N/A     |
| 19.6           | Type tests (A1:12)   |                 | —       |
|                | The type tests described in 22.5 shall be performed where relevant (A1:12)   |                 | N/A     |
| 20             | Supplementary requirements for restricted-breathing enclosures protecting apparatus producing arcs, sparks or hot surfaces (A1:12)         |                 | N/A     |
|                |  |                 |         |
| <b>D</b>       | <b>ANNEX D (NORMATIVE)<br/>THERMAL MOTOR PROTECTORS</b>  |                 | —       |
|                | Applicable to appliances having motors that incorporate thermal motor protectors necessary for compliance with the standard                |                 | N/A     |
|                | This annex does not apply to motor-compressors or condenser fan motors (IEC 60335-2-24:2010)   |                 | N/A     |
|                | Test conditions as specified   |                 | N/A     |
|                |  |                 |         |
| <b>E</b>       | <b>ANNEX E (NORMATIVE)<br/>NEEDLE-FLAME TEST</b>   |                 | —       |
|                | Needle-flame test carried out in accordance with IEC 60695-2-2, with the following modifications:  |                 | —       |
| 7              | Severities   |                 | —       |
|                | The duration of application of the test flame is 30 s ± 1 s  |                 | P       |
| 9              | Test procedure   |                 | —       |
| 9.1            | The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1               |                 | P       |
| 9.2            | The first paragraph does not apply   |                 | P       |
|                | If possible, the flame is applied at least 10 mm from a corner   |                 | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
| 9.3            | The test is carried out on one specimen  |                 | P       |
|                | If the specimen does not withstand the test, the test may be repeated on two further specimens, both withstanding the test   |                 | N/A     |
| 11             | Evaluation of test results   |                 | —       |
|                | The duration of burning not exceeding 30 s   |                 | N/A     |
|                | However, for printed circuit boards, the duration of burning not exceeding 15 s  |                 | P       |
| <b>F</b>       | <b>ANNEX F (NORMATIVE)<br/>CAPACITORS</b>  |                 | —       |
|                | Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications: |                 | —       |
| 1.5            | Terms and definitions  |                 | N/A     |
| 1.5.3          | Class X capacitors tested according to subclass X2   |                 | N/A     |
| 1.5.4          | This subclause is applicable   |                 | N/A     |
| 1.6            | Marking  |                 | —       |
|                | Items a) and b) are applicable   |                 | N/A     |
| 3.4            | Approval testing   |                 | —       |
| 3.4.3.2        | Table 3 is applicable as described   |                 | N/A     |
| 4.1            | Visual examination and check of dimensions   |                 | —       |
|                | This subclause is applicable   |                 | N/A     |
| 4.2            | Electrical tests   |                 | —       |
| 4.2.1          | This subclause is applicable   |                 | N/A     |
| 4.2.5          | This subclause is applicable   |                 | N/A     |
| 4.2.5.2        | Only table 11 is applicable  |                 | N/A     |
|                | Values for test A apply  |                 | N/A     |
|                | However, for capacitors in heating appliances the values for test B or C apply   |                 | N/A     |
| 4.12           | Damp heat, steady state  |                 | —       |
|                | This subclause is applicable   |                 | N/A     |
|                | Only insulation resistance and voltage proof are checked   |                 | N/A     |
| 4.13           | Impulse voltage  |                 | —       |
|                | This subclause is applicable   |                 | N/A     |
| 4.14           | Endurance  |                 | —       |
|                | Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable  |                 | N/A     |

| IEC 60335-2-24      |   |                 |         |
|---------------------|---|-----------------|---------|
| Clause              | Requirement – Test  | Result – Remark | Verdict |
| 4.14.7              | Only insulation resistance and voltage proof are checked  |                 | N/A     |
|                     | No visible damage   |                 | N/A     |
| 4.17                | Passive flammability test   |                 | —       |
|                     | This subclause is applicable  |                 | N/A     |
| 4.18                | Active flammability test  |                 | —       |
|                     | This subclause is applicable  |                 | N/A     |
| <b>G</b>            | <b>ANNEX G (NORMATIVE)<br/>SAFETY ISOLATING TRANSFORMERS</b>  |                 | —       |
|                     | The following modifications to this standard are applicable for safety isolating transformers:  |                 | —       |
| 7                   | Marking and instructions  |                 | —       |
| 7.1                 | Transformers for specific use marked with:  |                 | —       |
|                     | -name, trademark or identification mark of the manufacturer or responsible vendor :   |                 | N/A     |
|                     | -model or type reference :  |                 | N/A     |
| 17                  | Overload protection of transformers and associated circuits   |                 | —       |
|                     | Fail-safe transformers comply with subclause 15.5 of IEC 61558-1  |                 | N/A     |
| 22                  | Construction  |                 | —       |
|                     | Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable  |                 | N/A     |
| 29                  | Clearances, creepage distances and solid insulation   |                 | —       |
| 29.1, 29.2 and 29.3 | The distances specified in items 2a, 2c and 3 in Table 13 of IEC 61558-1 apply  |                 | N/A     |
|                     | For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1 there are no requirements for clearances or creepage distances  |                 | N/A     |
|                     | For windings providing reinforced insulation, the distance specified in item 2c of table 13 of IEC 61558-1 is not assessed  |                 | N/A     |
|                     | For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4 are applicable, if greater than the values specified in items 2a, 2c and 3 in Table 13 of IEC 61558-1 |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| <b>H</b>       | <b>ANNEX H (NORMATIVE)<br/>SWITCHES</b>   |                 | —       |
|                | Switches comply with the following clauses of IEC 61058-1, as modified below:   |                 | —       |
|                | The tests of IEC 61058-1 carried out under the conditions occurring in the appliance  |                 | N/A     |
|                | Before being tested, switches are operated 20 times without load  |                 | N/A     |
| 8              | Marking and documentation   |                 | —       |
|                | Switches are not required to be marked  |                 | N/A     |
|                | However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference |                 | N/A     |
| 13             | Mechanism   |                 | —       |
|                | The tests may be carried out on a separate sample   |                 | N/A     |
| 15             | Insulation resistance and dielectric strength   |                 | —       |
| 15.1           | Not applicable  |                 | N/A     |
| 15.2           | Not applicable  |                 | N/A     |
| 15.3           | Applicable for full disconnection and micro-disconnection   |                 | N/A     |
| 17             | Endurance   |                 | N/A     |
|                | Compliance is checked on three separate appliances or switches  |                 | N/A     |
|                | For 17.2.4.4, the number of cycles declared according to 7.1.4 is 10 000, unless  |                 | N/A     |
|                | otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335 :   |                 | N/A     |
|                | Switches for operation under no load and which can be operated only by a tool, and  |                 | N/A     |
|                | switches operated by hand that are interlocked so that they cannot be operated under load,  |                 | N/A     |
|                | are not subjected to the tests  |                 | N/A     |
|                | However, switches without this interlock are subjected to the test of 17.2.4.4 for 100 cycles of operation                                  |                 | N/A     |
|                | Subclauses 17.2.2 and 17.2.5.2 not applicable   |                 | N/A     |
|                | The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1                      |                 | N/A     |
|                | The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1 (K) :              |                 | N/A     |
| 20             | Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies   |                 | —       |



| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
|                | Clause 20 is applicable to clearances across full disconnection and micro-disconnection  |                 | N/A     |
|                | It is also applicable to creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in Table 24  |                 | N/A     |
|                |  |                 |         |
| <b>I</b>       | <b>ANNEX I (NORMATIVE)<br/>MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE</b>  |                 | —       |
|                | The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:                                |                 | —       |
| 8              | Protection against access to live parts  |                 | —       |
| 8.1            | Metal parts of the motor are considered to be bare live parts  |                 | N/A     |
| 11             | Heating  |                 | —       |
| 11.3           | The temperature rise of the body of the motor is determined instead of the temperature rise of the windings  |                 | N/A     |
| 11.8           | The temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in Table 3 for the relevant insulating material                           |                 | N/A     |
| 16             | Leakage current and electric strength  |                 | N/A     |
| 16.3           | Insulation between live parts of the motor and its other metal parts is not subjected to the test  |                 | N/A     |
| 19             | Abnormal operation   |                 | N/A     |
| 19.1           | The tests of 19.7 to 19.9 are not carried out  |                 | N/A     |
| 19.1.101       | Appliance operated at rated voltage with each of the following fault conditions:   |                 | —       |
|                | - short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit   |                 | N/A     |
|                | - short circuit of each diode of the rectifier   |                 | N/A     |
|                | - open circuit of the supply to the motor  |                 | N/A     |
|                | - open circuit of any parallel resistor, the motor being in operation  |                 | N/A     |
|                | Only one fault simulated at a time, the tests carried out consecutively  |                 | N/A     |
| 22             | Construction   |                 | —       |
| 22.1.101       | For class I appliances incorporating a motor supplied by a rectifier circuit, the d.c. circuit being insulated from accessible parts of the appliance by double or reinforced insulation |                 | N/A     |
|                | Compliance checked by the tests specified for double and reinforced insulation   |                 | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
| <b>J</b>       | <b>ANNEX J (NORMATIVE)<br/>COATED PRINTED CIRCUIT BOARDS</b>   |                 | —       |
|                | Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:  |                 | —       |
| 5.7            | Conditioning of the test specimens   |                 | —       |
|                | When production samples are used, three samples of the printed circuit board are tested  |                 | N/A     |
| 5.7.1          | Cold   |                 | —       |
|                | The test is carried out at -25 °C  |                 | N/A     |
| 5.7.3          | Rapid change of temperature  |                 | —       |
|                | Severity 1 is specified  |                 | N/A     |
| 5.9            | Additional tests   |                 | —       |
|                | This subclause is not applicable   |                 | N/A     |
| <b>K</b>       | <b>ANNEX K (NORMATIVE)<br/>OVERVOLTAGE CATEGORIES</b>  |                 | —       |
|                | The information on overvoltage categories is extracted from IEC 60664-1  |                 | P       |
|                | Overvoltage category is a numeral defining a transient overvoltage condition   |                 | P       |
|                | Equipment of overvoltage category IV is for use at the origin of the installation  |                 | N/A     |
|                | Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements |                 | N/A     |
|                | Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation  |                 | P       |
|                | If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies   |                 | N/A     |
|                | Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level                    |                 | N/A     |
| <b>L</b>       | <b>ANNEX L (INFORMATIVE)<br/>GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES</b>   |                 | —       |
|                | Information for the determination of clearances and creepage distances   |                 | P       |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| <b>M</b>       | <b>ANNEX M (NORMATIVE)<br/>POLLUTION DEGREE</b>   |                 | —       |
|                | The information on pollution degrees is extracted from IEC 60664-1  |                 | P       |
|                | Pollution   |                 | —       |
|                | The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment   |                 | P       |
|                | Means may be provided to reduce pollution at the insulation by effective enclosures or similar  |                 | P       |
|                | Minimum clearances specified where pollution may be present in the microenvironment   |                 | P       |
|                | Degrees of pollution in the microenvironment  |                 | —       |
|                | For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:  |                 | —       |
|                | - pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence   |                 | N/A     |
|                | - pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected      |                 | N/A     |
|                | - pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected |                 | P       |
|                | - pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow  |                 | N/A     |
| <b>N</b>       | <b>ANNEX N (NORMATIVE)<br/>PROOF TRACKING TEST</b>  |                 | —       |
|                | The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:   |                 | —       |
| 7              | Test apparatus  |                 | —       |
| 7.3            | Test solutions  |                 | —       |
|                | Test solution A is used   |                 | P       |
| 10             | Determination of proof tracking index (PTI)   |                 | —       |
| 10.1           | Procedure   |                 | —       |
|                | The proof voltage is 100V, 175V, 400V or 600V   |                 | P       |
|                | The test is carried out on five specimens   |                 | P       |
|                | In case of doubt, additional test with proof voltage reduced by 25V, the number of drops increased to 100   |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| 10.2           | Report  |                 | —       |
|                | The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V  |                 | N/A     |
|                |   |                 |         |
| <b>O</b>       | <b>ANNEX O (INFORMATIVE)<br/>SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30</b>   |                 | —       |
|                | Description of tests for determination of resistance to heat and fire   |                 | P       |
|                |   |                 |         |
| <b>P</b>       | <b>ANNEX P (INFORMATIVE)<br/>GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES<br/>USED IN WARM DAMP EQUABLE CLIMATES</b>   |                 | —       |
|                | Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150 V, intended to be used in countries having a warm damp equable climate and that are marked WDaE   |                 | —       |
|                | Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150 V, intended to be used in countries having a warm damp equable climate and that are marked WdaE, if liable to be connected to a supply mains that excludes the protective earthing conductor |                 | —       |
| 5.7            | The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C  |                 | N/A     |
| 7.1            | The appliance marked with the letters WDaE  |                 | N/A     |
| 7.12           | The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA   |                 | N/A     |
|                | The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries   |                 | N/A     |
| 11.8           | The values of Table 3 are reduced by 15 K   |                 | N/A     |
| 13.2           | The leakage current for class I appliances not exceeding 0.5 mA   |                 | N/A     |
| 15.3           | The value of t is 37 °C   |                 | N/A     |
| 16.2           | The leakage current for class I appliances not exceeding 0.5 mA (mA):   |                 | N/A     |
| 19.13          | The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3   |                 | N/A     |
|                |   |                 |         |
| <b>Q</b>       | <b>ANNEX Q (INFORMATIVE)<br/>SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS</b>  |                 | —       |
|                | Description of tests for appliances incorporating electronic circuits   |                 | —       |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
| <b>R</b>       | <b>ANNEX R (NORMATIVE)<br/>SOFTWARE EVALUATION</b>   |                 | —       |
|                | Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex   |                 | N/A     |
| R.1            | Programmable electronic circuits using software  |                 | —       |
|                | Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard  |                 | N/A     |
| R.2            | Requirements for the architecture  |                 | —       |
|                | Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software                           |                 | N/A     |
| R.2.1.1        | Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:  |                 | —       |
|                | - single channel with periodic self-test and monitoring  |                 | N/A     |
|                | - dual channel (homogenous) with comparison  |                 | N/A     |
|                | - dual channel (diverse) with comparison   |                 | N/A     |
|                | Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:  |                 | —       |
|                | - single channel with functional test  |                 | N/A     |
|                | - single channel with periodic self-test   |                 | N/A     |
|                | - dual channel without comparison  |                 | N/A     |
| R.2.2          | Measures to control faults/errors  |                 | —       |
| R.2.2.1        | When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area   |                 | N/A     |
| R.2.2.2        | Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison |                 | N/A     |
| R.2.2.3        | For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths                       |                 | N/A     |

| IEC 60335-2-24 |   |                   |         |
|----------------|---|-------------------|---------|
| Clause         | Requirement – Test  | Result – Remark   | Verdict |
| R.2.2.4        | For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate  |                   | N/A     |
| R.2.2.5        | For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 is impaired  |                   | N/A     |
| R.2.2.6        | The software is referenced to relevant parts of the operating sequence and the associated hardware functions  |                   | N/A     |
| R.2.2.7        | Labels used for memory locations are unique   |                   | N/A     |
| R.2.2.8        | The software is protected from user alteration of safety-related segments and data  |                   | N/A     |
| R.2.2.9        | Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired   |                   | N/A     |
| R.3            | Measures to avoid errors  |                   | —       |
| R.3.1          | General   |                   | —       |
|                | For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied   |                   | —       |
|                | Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1   |                   | N/A     |
| R.3.2          | Specification   |                   | —       |
| R.3.2.1        | Software safety requirements:   | Software Id:      | N/A     |
|                | The specification of the software safety requirements includes the descriptions listed  |                   | N/A     |
| R.3.2.2        | Software architecture   |                   | —       |
| R.3.2.2.1      | The specification of the software architecture includes the aspects listed<br>- techniques and measures to control software faults/errors (refer to R.2.2);<br>- interactions between hardware and software;<br>- partitioning into modules and their allocation to the specified safety functions;<br>- hierarchy and call structure of the modules (control flow);<br>- interrupt handling;<br>- data flow and restrictions on data access;<br>- architecture and storage of data;<br>- time-based dependencies of sequences and data | Document ref. No: | N/A     |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
| R.3.2.2.2      | The architecture specification is validated against the specification of the software safety requirements by static analysis |                 | N/A     |
| R.3.2.3        | Module design and coding   |                 | N/A     |
| R.3.2.3.1      | Based on the architecture design, software is suitably refined into modules  |                 | N/A     |
|                | Software module design and coding is implemented in a way that is traceable to the software architecture and requirements    |                 | N/A     |
| R.3.2.3.2      | Software code is structured  |                 | N/A     |
| R.3.2.3.3      | Coded software is validated against the module specification by static analysis  |                 | N/A     |
|                | The module specification is validated against the architecture specification by static analysis                              |                 | N/A     |
| R.3.3.3        | Software validation  |                 | —       |
|                | The software is validated with reference to the requirements of the software safety requirements specification               |                 | N/A     |
|                | Compliance is checked by simulation of:  |                 | —       |
|                | - input signals present during normal operation  |                 | N/A     |
|                | - anticipated occurrences  |                 | N/A     |
|                | - undesired conditions requiring system action   |                 | N/A     |

| IEC 60335-2-24 |                    |                 |         |
|----------------|--------------------|-----------------|---------|
| Clause         | Requirement – Test | Result – Remark | Verdict |

| IEC 60335-2-24  |   |  |  |  |                                     |         |
|---|---|--|--|--|-------------------------------------|---------|
| TABLE R.1 <sup>e</sup>                                      |   | TABLE R.1 <sup>e</sup> : GENERAL FAULT/ERROR CONDITIONS  |  |  |                                     |         |
| Component<br><sub>a</sub>                                   | Fault/error   | Acceptable measures <sup>b, c</sup>  | Definitions  | Document reference for applied measure | Document reference for applied test | Verdict |
| 1 CPU<br>1.1 Registers                                      | Stuck at  | Functional test, or periodic self-test using either:<br>- static memory test, or<br>- word protection with single bit redundancy | H.2.16.5<br>H.2.16.6<br>H.2.19.6<br>H.2.19.8.2     |  |                                     | N/A     |
| 1.2 VOID  |   |  |  |  |                                     | —       |
| 1.3 Programme counter                                       | Stuck at  | Functional test, or Periodic self-test, or Independent time-slot monitoring, or Logical monitoring of the programme sequence     | H.2.16.5<br>H.2.16.6<br>H.2.18.10.4<br>H.2.18.10.2 |  |                                     | N/A     |
| 2 Interrupt handling and execution                          | No interrupt or too frequent interrupt  | Functional test, or time-slot monitoring   | H.2.16.5<br>H.2.18.10.4                            |  |                                     | N/A     |
| 3 Clock   | Wrong frequency (for quartz synchronized clock: harmonics/sub-harmonics only) | Frequency monitoring, or time slot monitoring  | H.2.18.10.1<br>H.2.18.10.4                         |  |                                     | N/A     |
| 4. Memory<br>4.1 Invariable memory                          | All single bit faults   | Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy                                  | H.2.19.3.1<br>H.2.19.3.2<br>H.2.19.8.2             |  |                                     | N/A     |
| 4.2 Variable memory   | DC fault  | Periodic static memory test, or word protection with single bit redundancy   | H.2.19.6<br>H.2.19.8.2                             |  |                                     | N/A     |
| 4.3 Addressing (relevant to variable and invariable memory) | Stuck at  | Word protection with single bit redundancy including the address   | H.2.19.8.2   |  |                                     | N/A     |
| 5 Internal data path  | Stuck at  | Word protection with single bit redundancy   | H.2.19.8.2   |  |                                     | N/A     |



| IEC 60335-2-24 |                    |                 |         |
|----------------|--------------------|-----------------|---------|
| Clause         | Requirement – Test | Result – Remark | Verdict |

| IEC 60335-2-24                                |   |   |   |  |                                     |         |
|---|---|---|---|--|-------------------------------------|---------|
| TABLE R.1 <sup>e</sup>                        |   | TABLE R.1 <sup>e</sup> : GENERAL FAULT/ERROR CONDITIONS   |   |  |                                     |         |
| Component<br><sub>a</sub>                     | Fault/error                               | Acceptable measures <sup>b, c</sup>   | Definitions   | Document reference for applied measure | Document reference for applied test | Verdict |
| 5.1 VOID                                      |   |   |   |  |                                     | —       |
| 5.2 Addressing                                | Wrong address                             | Word protection with single bit redundancy including the address  | H.2.19.8.2  |  |                                     | N/A     |
| Component<br><sub>a</sub>                     | Fault/error                               | Acceptable measures <sup>b, c</sup>   | Definitions   | Document reference for applied measure | Document reference for applied test | Verdict |
| 6 External communication                      | Hamming distance 3                        | Word protection with multi-bit redundancy, or CRC – single word, or Transfer redundancy, or Protocol test   | H.2.19.8.1<br>H.2.19.4.1<br>H.2.18.2.2<br>H.2.18.14   |  |                                     | N/A     |
| 6.1 VOID                                      |   |   |   |  |                                     | —       |
| 6.2 VOID                                      |   |   |   |  |                                     | —       |
| 6.3 Timing                                    | Wrong point in time<br><br>Wrong sequence | Time-slot monitoring, or scheduled transmission<br>Time-slot and logical monitoring, or comparison of redundant communication channels by either:<br>- reciprocal comparison<br>- independent hardware comparator<br>Logical monitoring, or time-slot monitoring, or Scheduled transmission | H.2.18.10.4<br>H.2.18.18<br>H.2.18.10.3<br><br>H.2.18.15<br>H.2.18.3<br><br>H.2.18.10.2<br>H.2.18.10.4<br>H.2.18.18 |  |                                     | N/A     |
| 7 Input/output periphery                      | Fault conditions specified in 19.11.2     | Plausibility check  | H.2.18.13   |  |                                     | N/A     |
| 7.1 VOID                                      |   |   |   |  |                                     | —       |
| 7.2 Analog I/O<br>7.2.1 A/D and D/A-converter | Fault conditions specified in 19.11.2     | Plausibility check  | H.2.18.13   |  |                                     | N/A     |
| 7.2.2 Analog multiplexer                      | Wrong addressing                          | Plausibility check  | H.2.18.13   |  |                                     | N/A     |
| 8 VOID  |   |   |   |  |                                     | —       |

| IEC 60335-2-24 |                    |                 |         |
|----------------|--------------------|-----------------|---------|
| Clause         | Requirement – Test | Result – Remark | Verdict |

| IEC 60335-2-24  |  |   |             |  |                                     |         |
|---|--|---|-------------|--|-------------------------------------|---------|
| TABLE R.1 <sup>e</sup>  |  | TABLE R.1 <sup>e</sup> : GENERAL FAULT/ERROR CONDITIONS |             |  |                                     |         |
| Component <sup>a</sup>  | Fault/error  | Acceptable measures <sup>b, c</sup>                     | Definitions | Document reference for applied measure | Document reference for applied test | Verdict |
| 9 Custom chips <sup>d</sup> e.g. ASIC, GAL, gate array  | Any output outside the static and dynamic functional specification | Periodic self-test                                      | H.2.16.6    |  |                                     | N/A     |
| NOTE: A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuit between signal lines.  |  |   |             |  |                                     |         |
| <sup>a</sup> ) For fault/error assessment, some components are divided into their sub-functions.<br><sup>b</sup> ) For each sub-function in the table, the Table R.2 measure will cover the software fault/error.<br><sup>c</sup> ) Where more than one measure is given for a sub-function, these are alternatives.<br><sup>d</sup> ) To be divided as necessary by the manufacturer into sub-functions.<br><sup>e</sup> ) Table R.1 is applied according to the requirements of R.1 to R.2.2.9 inclusive. |  |   |             |  |                                     |         |

|          |   |  |  |     |
|----------|---|--|--|-----|
| <b>S</b> | <b>ANNEX S (NORMATIVE)</b><br><b>BATTERY OPERATED APPLIANCES POWERED BY BATTERIES THAT ARE NON-RECHARGEABLE OR NOT RECHARGED IN THE APPLIANCE</b>                   |  |  | —   |
|          | The following modifications to this standard are applicable for battery-operated appliances where the batteries are either non-rechargeable (primary batteries), or |  |  | N/A |
|          | rechargeable batteries (secondary batteries) that are not recharged in the appliance  |  |  | N/A |
| 5.8.1    | If the supply terminals for the connection of the battery have no indication of polarity, the more unfavourable polarity is applied                                 |  |  | N/A |
| 5.S.101  | Appliances intended for use with a battery box are tested with the battery box supplied with the appliance or with the battery box recommended in the instructions  |  |  | N/A |
| 5.S.102  | Appliances are tested as motor-operated appliances.   |  |  | N/A |
| 7.1      | Appliances marked with the battery voltage (V) and the polarity of the terminals, unless :  |  |  | N/A |
|          | the polarity is irrelevant  |  |  | N/A |
|          | Appliances also marked with:  |  |  | —   |
|          | – name, trade mark or identification mark of the manufacturer or responsible vendor :   |  |  | N/A |
|          | – model or type reference :   |  |  | N/A |
|          | – IP number according to degree of protection against ingress of water, other than IPX0 :   |  |  | N/A |

| IEC 60335-2-24 |  |                 |         |
|----------------|--|-----------------|---------|
| Clause         | Requirement – Test   | Result – Remark | Verdict |
| <b>S</b>       | <b>ANNEX S (NORMATIVE)</b><br><b>BATTERY OPERATED APPLIANCES POWERED BY BATTERIES THAT ARE NON-RECHARGEABLE OR NOT RECHARGED IN THE APPLIANCE</b>                |                 | —       |
|                | – type reference of battery or batteries :   |                 | N/A     |
|                | If relevant, the positive terminal is indicated by the symbol IEC 60417-5005 and the negative terminal by the symbol IEC 60417-5006                              |                 | N/A     |
|                | If appliances use more than one battery, they are marked to indicate correct polarity connection of the batteries  |                 | N/A     |
| 7.6            | Additional symbols   |                 | N/A     |
| 7.12           | The instructions contain the following, as applicable:   |                 | —       |
|                | – the types of batteries that may be used :  |                 | N/A     |
|                | – how to remove and insert the batteries   |                 | N/A     |
|                | – non-rechargeable batteries are not to be recharged   |                 | N/A     |
|                | – different types of batteries or new and used batteries are not to be mixed   |                 | N/A     |
|                | – batteries are to be inserted with the correct polarity   |                 | N/A     |
|                | – exhausted batteries are to be removed from the appliance and safely disposed of  |                 | N/A     |
|                | – if the appliance is to be stored unused for a long period, the batteries are removed   |                 | N/A     |
|                | – the supply terminals are not to be short-circuited   |                 | N/A     |
| 11.5           | Appliances are supplied with the most unfavourable supply voltage between  |                 | —       |
|                | – 0.55 and 1.0 times the battery voltage, if the appliance can be used with non-rechargeable batteries   |                 | N/A     |
|                | – 0.75 and 1.0 times battery voltage, if the appliance is designed for use with rechargeable batteries only  |                 | N/A     |
|                | The values specified in Table S.101 for the internal resistance per cell of the battery is taken into account  |                 | N/A     |
| 19.1           | The tests are carried out with the battery fully charged unless otherwise specified  |                 | N/A     |
| 19.13          | The battery does not rupture or ignite   |                 | N/A     |
| 19.S.101       | Appliances are supplied with the voltage specified in 11.5. The supply terminals having an indication of polarity are connected to the opposite polarity, unless |                 | N/A     |
|                | such a connection is unlikely to occur due to the construction of the appliance  |                 | N/A     |

| IEC 60335-2-24 |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement – Test  | Result – Remark | Verdict |
| <b>S</b>       | <b>ANNEX S (NORMATIVE)</b><br><b>BATTERY OPERATED APPLIANCES POWERED BY BATTERIES THAT ARE NON-RECHARGEABLE OR NOT RECHARGED IN THE APPLIANCE</b>   |                 | —       |
| 19.S.102       | For appliances with provision for multiple batteries, one or more of the batteries are reversed and the appliance is operated, if reversal of batteries is allowed by the construction  |                 | N/A     |
| 25.5           | The flexible leads or flexible cord used to connect an external battery or battery box in is connected to the appliance by a type X attachment  |                 | N/A     |
| 25.13          | This requirement is not applicable to the flexible leads or flexible cord connecting external batteries or a battery box with an appliance  |                 | N/A     |
| 25.S.101       | Appliances have suitable means for connection of the battery. If the type of battery is marked on the appliance, the means of connection is suitable for this type of battery   |                 | N/A     |
| 26.5           | Terminal devices in an appliance for the connection of the flexible leads or flexible cord connecting an external battery or battery box are so located or shielded that there is no risk of accidental connection between supply terminals |                 | N/A     |
| 30.2.3.2       | There is no battery in the area of the vertical cylinder used for the consequential needle flame test, unless   |                 | N/A     |
|                | the battery is shielded by a barrier that meets the needle flame test of Annex E, or  |                 | N/A     |
|                | that comprises material classified as V-0 or V-1 according to IEC 60695-11-10   |                 | N/A     |

## IEC 60335-2-24

| 10.1                       | TABLE: Power input deviation |                |            |                     |               | P |
|----------------------------|------------------------------|----------------|------------|---------------------|---------------|---|
| Input deviation of/at:     | P rated (W)                  | P measured (W) | $\Delta P$ | Required $\Delta P$ | Remark        |   |
| KLR-50LA                   | 900                          | 792,4          | -12,0 %    | +20 %               | 230 V~, 50 Hz |   |
| Supplementary information: |                              |                |            |                     |               |   |

| 10.2                       | TABLE: Current deviation |                |            |                     |               | P |
|----------------------------|--------------------------|----------------|------------|---------------------|---------------|---|
| Current deviation of/at:   | I rated (A)              | I measured (A) | $\Delta I$ | Required $\Delta I$ | Remark        |   |
| KLR-50LA                   | 4,0                      | 4,2            | +5,0 %     | +20 %               | 230 V~, 50 Hz |   |
| Supplementary information: |                          |                |            |                     |               |   |

|  |  |  |                                    |
|--|--|--|------------------------------------|
| 11.8                                   | TABLE: Heating test, thermocouple measurements |  | P                                  |
|  | Test voltage (V) .....:                        | 240 V x 1,06 = 254,4 V                 | —                                  |
|  | Ambient (°C).....:                             | 43,0                                   | —                                  |
| Thermocouple locations                 |  | Max. temperature rise measured, ΔT (K) | Max.temperature rise limit, ΔT (K) |
| Wall of the test corner                |  | 2,7                                    | 53                                 |
| Ceiling of the test corner             |  | 2,2                                    | 53                                 |
| Floor of the test corner               |  | 2,3                                    | 53                                 |
| Supply cord                            |  | 9,4                                    | 43                                 |
| Coupler                                |  | 12,9                                   | 53                                 |
| Internal wire                          |  | 10,7                                   | 43                                 |
| Water pump                             |  | 5,4                                    | 58                                 |
| Solenoid valve                         |  | 16,7                                   | 58                                 |
| Rocker switch                          |  | 7,4                                    | 53                                 |
| External enclosure of motor-compressor |  | 47,3                                   | Ref.                               |
| Run capacitor for compressor           |  | 14,8                                   | 43                                 |
| Run capacitor for fan motor            |  | 16,0                                   | 43                                 |
| Plastic enclosure                      |  | 11,9                                   | cl.30                              |
| Transformer                            |  | 18,1                                   | 78                                 |
| Main PCB                               |  | 10,5                                   | 113                                |
| Display board                          |  | 2,8                                    | 113                                |
| X2 capacitor                           |  | 6,5                                    | 43                                 |
| Relay (30 A)                           |  | 14,2                                   | 53                                 |
| Relay (10 A)                           |  | 10,6                                   | 53                                 |
| Relay (5 A)                            |  | 5,9                                    | 53                                 |
| Supplementary information:             |  |  |                                    |
| 11.8                                   | TABLE: Heating test, resistance method         |  | P                                  |

## IEC 60335-2-24

|                                    |                        |                    |        |             |                  |
|------------------------------------|------------------------|--------------------|--------|-------------|------------------|
| Test voltage (V).....:             | 240 V x 1,06 = 254,4 V |                    |        |             | —                |
| Ambient, T <sub>1</sub> (°C).....: | 43,0                   |                    |        |             | —                |
| Ambient, T <sub>2</sub> (°C).....: | 43,0                   |                    |        |             | —                |
| Temperature rise of winding        | R <sub>1</sub> (Ω)     | R <sub>2</sub> (Ω) | ΔT (K) | Max. ΔT (K) | Insulation class |
| Fan Motor                          | 521,4                  | 593,2              | 38,2   | 88          | B                |
| Supplementary information:         |                        |                    |        |             |                  |

|                                 |  |                        |                     |
|---------------------------------|--|------------------------|---------------------|
| 13.2                            | TABLE: Leakage current   |                        | P                   |
|                                 | Heating appliances: 1.15 x rated input (V):                          | --                     | —                   |
|                                 | Motor-operated and combined appliances:<br>1.06 x rated voltage (V): | 240 V x 1,06 = 254,4 V | —                   |
| Leakage current between         |  | I (mA)                 | Max. allowed I (mA) |
| L/N and earthed metal enclosure |  | 0,097                  | 3,5                 |
| L/N and plastic enclosure       |  | 0,032                  | 0,35 peak           |
| Supplementary information:      |  |                        |                     |

|  |                          |             |                      |   |
|--|--------------------------|-------------|----------------------|---|
| 13.3                                   | TABLE: Electric strength |             |                      | P |
| Test voltage applied between:          |                          | Voltage (V) | Breakdown (Yes / No) |   |
| Live parts and earthed metal enclosure |                          | 1000        | No                   |   |
| Live parts and plastic enclosure       |                          | 3000        | No                   |   |
| Supplementary information:             |                          |             |                      |   |

|                            |                                      |         |                  |                           |                          |                      |
|----------------------------|--------------------------------------|---------|------------------|---------------------------|--------------------------|----------------------|
| <b>14</b>                  | <b>TABLE: Transient overvoltages</b> |         |                  |                           |                          | <b>N/A</b>           |
| Clearance between:         |                                      | CI (mm) | Required CI (mm) | Rated impulse voltage (V) | Impulse test voltage (V) | Flashover (Yes / No) |
|                            |                                      |         |                  |                           |                          |                      |
| Supplementary information: |                                      |         |                  |                           |                          |                      |

|  |  |                        |                     |
|--|--|------------------------|---------------------|
| 16.2                                   | TABLE: Leakage current   |                        | P                   |
|  | Single phase appliances: 1.06 x rated voltage(V):                            | 240 V x 1,06 = 254,4 V | —                   |
|  | Three phase appliances: 1.06 x rated voltage divided by $\sqrt{3}$ (V).....: | --                     | —                   |
| Leakage current between                |  | I (mA)                 | Max. allowed I (mA) |
| Live parts and earthed metal enclosure |  | 0,102                  | 3,5                 |
| Live parts and plastic enclosure       |  | 0,043                  | 0,25                |
| Supplementary information:             |  |                        |                     |

## IEC 60335-2-24

|  |                                 |  |
|--|---------------------------------|--|
| <b>16.3</b>                            | <b>TABLE: Electric strength</b> | <b>P</b>   |
| Test voltage applied between:          |                                 | <div>Voltage (V)</div> <div>Breakdown (Yes / No)</div> |
| Live parts and earthed metal enclosure |                                 | 1250 No  |
| Live parts and plastic enclosure       |                                 | 3000 No  |
| Supplementary information:             |                                 |  |

|                              |  |  |
|------------------------------|--|--|
| <b>17</b>                    | <b>TABLE: Overload protection, thermocouple measurements</b> | <b>P</b>   |
| Temperature rise of part/at: |  | <div><math>\Delta T</math> (K) / T (°C)</div> <div>Max. <math>\Delta T</math> (K) / T (°C)</div> |
| Winding of transformer       |  | 43,9 °C 175 °C   |
| Supplementary information:   |  |  |

|                            |   |                    |                    |        |        |             |
|----------------------------|---|--------------------|--------------------|--------|--------|-------------|
| 17                         | TABLE: Overload protection, resistance method |                    |                    |        |        | N/A         |
|                            | Test voltage (V).....:                        |                    |                    |        |        | —           |
|                            | Ambient, T <sub>1</sub> (°C).....:            |                    |                    |        |        | —           |
|                            | Ambient, T <sub>2</sub> (°C).....:            |                    |                    |        |        | —           |
| Temperature of winding     |   | R <sub>1</sub> (Ω) | R <sub>2</sub> (Ω) | ΔT (K) | T (°C) | Max. T (°C) |
|                            |   |                    |                    |        |        |             |
| Supplementary information: |   |                    |                    |        |        |             |

|                            |  |                    |                    |        |        |             |
|----------------------------|--|--------------------|--------------------|--------|--------|-------------|
| 19.7                       | TABLE: Abnormal operation, locked rotor/moving parts |                    |                    |        |        | P           |
|                            | Test voltage (V).....:                               |                    | 240 V              |        |        | —           |
|                            | Ambient, T <sub>1</sub> (°C).....:                   |                    | 23,0               |        |        | —           |
|                            | Ambient, T <sub>2</sub> (°C).....:                   |                    | 23,0               |        |        | —           |
| Temperature of winding     |  | R <sub>1</sub> (Ω) | R <sub>2</sub> (Ω) | ΔT (K) | T (°C) | Max. T (°C) |
| Fan motor                  |  | 483,7              | 645,0              | 85,9   | 108,9  | 175         |
| Supplementary information: |  |                    |                    |        |        |             |

|   |                    |               |              |  |         |
|---|--------------------|---------------|--------------|--|---------|
| 19.11.2                                 | Abnormal Operation |               |              |  | P       |
| Fault condition                         |                    | Short circuit | Open circuit | Effect   | Verdict |
| According to a) to g) of clause 19.11.2 |                    | Yes           | Yes          | 1. The appliance stopped working.<br>2. The current fuse in PCB operated.<br>Above two phenomenons occurred. No hazard during and after all tests. | P       |
| Supplementary information:              |                    |               |              |  |         |

|                             |                                      |                        |
|-----------------------------|--------------------------------------|------------------------|
| <b>19.11.3/4</b>            | <b>Abnormal operation conditions</b> | <b>N/A</b>             |
| Operational characteristics | YES/NO                               | Operational conditions |

## IEC 60335-2-24

| Are there electronic circuits to control the appliance operation?           |                                  |                          | No              |             |                        |             |              |
|---|----------------------------------|--------------------------|-----------------|-------------|------------------------|-------------|--------------|
| Are there “off” or “stand-by” position?                                     |                                  |                          | No              |             |                        |             |              |
| The unintended operation of the appliance results in dangerous malfunction? |                                  |                          | No              |             |                        |             |              |
| Sub-clause  | Operating conditions description | Test results description | PEC description | EMP 19.11.4 | Software type required | 19.11.3 PEC | Final result |
| 19.2  | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.3  | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.4  | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.5  | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.6  | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.7  | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.8  | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.9  | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.10   | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.11.2   | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.11.4.8   | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| 19.10X  | N/A                              | N/A                      | N/A             | N/A         | N/A                    | N/A         | N/A          |
| Supplementary information:  |                                  |                          |                 |             |                        |             |              |

|                            |   |                |                     |
|----------------------------|---|----------------|---------------------|
| <b>19.13</b>               | <b>TABLE: Abnormal operation, temperature rises</b> |                | <b>P</b>            |
| Thermocouple locations     |   | $\Delta T$ (K) | Max. $\Delta T$ (K) |
| Test corner                |   | 4,9            | 150                 |
| Supply cord                |   | 15,3           | 150                 |
| Plastic enclosure          |   | 10,2           | cl.30               |
| Supplementary information: |   |                |                     |



## IEC 60335-2-24

| 24.1                                    | TABLE: Critical components information                         |                   |  |                               |                             | P |
|---|--|-------------------|--|-------------------------------|-----------------------------|---|
| Object / part No.                       | Manufacturer/<br>trademark                                     | Type / model      | Technical data                         | Standard                      | Mark(s) of<br>conformity1)  |   |
| Motor-<br>Compressor                    | Xian Qingan<br>Refrigeration<br>Equipment Co.,<br>Ltd.         | YZH-<br>E160RET2  | 220-240 V~, 50 Hz,<br>R22              | IEC 60335-1<br>IEC 60335-2-34 | CCC<br>20090107043<br>57571 |   |
| Thermal<br>protectors for<br>compressor | Foshan Tongbao<br>Huaxing<br>Controller Co.,<br>Ltd.           | BK13-3005         | 220-240 V~, 50 Hz,<br>20 A, 150°C/90°C | IEC 60730-1<br>IEC 60730-2-4  | CQC0600201<br>7549          |   |
| Alt.                                    | Changzhou<br>Changrong<br>Electrical<br>Appliance Co.,<br>Ltd. | HPA-618           | 220-240 V~, 50 Hz,<br>18 A, 150°C/90°C | IEC 60730-1<br>IEC 60730-2-4  | CQC0600201<br>8154          |   |
| Run capacitor for<br>compressor         | Guangdong<br>Fengming<br>Electronic<br>Tech.Co., Ltd.          | CBB65             | 30 μF, 450 VAC,<br>50/60 Hz, S2        | IEC 60252-1                   | CQC060020<br>18571          |   |
| Alt.                                    | GREE XIN YUAN<br>ELECTRONIC<br>COMPANY, LTD.                   | CBB65             | 30 μF, 450 VAC,<br>50/60 Hz, S2        | IEC 60252-1                   | CQC100020<br>53968          |   |
| Fan Motor                               | Guangzhou<br>Kunchi Motor Co.,<br>Ltd.                         | YKC-50-4          | 220-240 V, 50 Hz,<br>50 W, class B     | IEC 60335-1<br>IEC 60335-2-24 | Tested with<br>appliance    |   |
| Run capacitor for<br>fan motor          | FOSHAN<br>SHUNDE DAHUA<br>ELECTRIC<br>APPLIANCE CO.,<br>LTD.   | CBB61(CBB6<br>-1) | 1,5 μF, 450 VAC,<br>50/60 Hz, S3       | IEC 60252-1                   | CQC150061<br>27666          |   |
| Alt.                                    | GREE ELECTRIC<br>APPLIANCES,IN<br>C.OF ZHUHAI                  | CBB61             | 1,5 μF, 500 VAC,<br>50/60 Hz, S3       | IEC 60252-1                   | CQC160021<br>42056          |   |
| Electronic<br>Expansion Valve           | Dongguan<br>Sanjiang Cold<br>And Heat Co., Ltd.                | PQM10058          | 12 VDC                                 | IEC 60335-1<br>IEC 60335-2-24 | Tested with<br>appliance    |   |
| Alt.                                    | Dongguan<br>Sanjiang Cold<br>And Heat Co., Ltd.                | PQM10007          | 12 VDC                                 | IEC 60335-1<br>IEC 60335-2-24 | Tested with<br>appliance    |   |
| Alt.                                    | Zhejiang Dunan<br>Hetian Metal<br>Co., .Ltd                    | DPFX07-127        | 12 VDC                                 | IEC 60730-1                   | CQC1500212<br>1954          |   |
| Waste water<br>solenoid valve           | Wenzhou Dayang<br>Technology Co.,<br>Ltd.                      | 900               | 24 VDC; 4,8 W                          | IEC 60335-1<br>IEC 60335-2-24 | Tested with<br>appliance    |   |
| Alt.                                    | Wenzhou Dayang<br>Technology Co.,<br>Ltd.                      | 1100              | 24 VDC; 4,8 W                          | IEC 60335-1<br>IEC 60335-2-24 | Tested with<br>appliance    |   |

## IEC 60335-2-24

|                                      |  |                 |                     |                               |                       |
|--------------------------------------|--|-----------------|---------------------|-------------------------------|-----------------------|
| Alt.                                 | Zhejiang kebo Electrical Appliances Co., Ltd   | FPD-270M2       | 24 VDC; 4,8 W       | IEC 60335-1<br>IEC 60335-2-24 | CQC0900203<br>5432    |
| Self-priming Pump                    | Guandong Shunde Yuanbaobao Appliance Co., Ltd  | 24400X          | 24 VDC ≤3,5 A       | IEC 60335-1<br>IEC 60335-2-24 | Tested with appliance |
| Alt.                                 | Guandong Shunde Yuanbaobao Appliance Co., Ltd  | C24400X         | 24 VDC ≤3,5 A       | IEC 60335-1<br>IEC 60335-2-24 | Tested with appliance |
| External Water Electromagnetic Valve | Zhongshan Dongsheng Tianshan Appliance Factory | FPDFK-19        | 24 VDC; 300 mA      | IEC 60335-1<br>IEC 60335-2-24 | Tested with appliance |
| Three - Way Solenoid Valve           | Zhongshan Dongsheng Tianshan Appliance Factory | FPSF-06         | 24 VDC; 300 mA      | IEC 60335-1<br>IEC 60335-2-24 | Tested with appliance |
| Alt.                                 | Zhongshan Dongsheng Tianshan Appliance Factory | /               | 24 VDC; 300 mA      | IEC 60335-1<br>IEC 60335-2-24 | Tested with appliance |
| Rocker switch                        | Yueqing Niufulai Electronics Co., Ltd.         | KCD4            | 16(8) A; 250 VAC    | IEC 61058-1                   | CQC060030<br>16807    |
| Relay                                | XIAMEN HONGFA ELECTROACOUSTIC CO., LTD.        | HF2160-1A-12DE  | 30 A, 240 VAC       | IEC 61810-1                   | CQC0800202<br>7546    |
| Alt.                                 | XIAMEN HONGFA ELECTROACOUSTIC CO., LTD.        | HF3FF(JQC-3FF)  | 10 A, 277 VAC       | IEC 61810-1                   | CQC0800202<br>7861    |
| Alt.                                 | XIAMEN HONGFA ELECTROACOUSTIC CO., LTD         | HF32F (JZC-32F) | 5 A, 250 VAC        | IEC 61810-1                   | CQC0800202<br>7011    |
| Alt.                                 | Dongguan Yongneng Electronics Co. Ltd.         | YX209H-S-124DM  | 30/20 A; 250 VAC    | IEC 61810-1                   | CQC1500213<br>7846    |
| Alt.                                 | DongGuan YongNeng Electronics Co., Ltd         | YX202-S-124DM   | 10 A; 250 VAC       | IEC 61810-1                   | CQC0800102<br>3688    |
| X2 capacitor                         | SHENZHEN TENTA ELECTRICAL APPLIANCE LTD.       | MKP             | 275 VAC; 0,1 µF; X2 | IEC 60384-14                  | CQC0300100<br>3039    |

## IEC 60335-2-24

|                   |   |                   |  |                               |                         |
|-------------------|---|-------------------|--|-------------------------------|-------------------------|
| Transformer       | Jiangyin Runyang Electric Appliance Co., Ltd.     | AD-2450           | 220-240 VAC 50 / 60Hz ,the output voltage 24VDC, Output current 5A Class A | IEC 61558-1<br>IEC 61558-2-16 | CQC09001034638          |
| Fuse              | Dongguan Better Electronics Technology Co., Ltd.  | 522               | T10AL250V  | IEC 60127-1<br>IEC 60127-2    | CQC05012012795          |
| Alt.              | Dongguan Better Electronics Technology Co., Ltd.  | 524               | T10AH250V  | IEC 60127-1<br>IEC 60127-2    | CQC06012017561          |
| Alt.              | Dongguan Better Electronics Technology Co., Ltd.  | 522               | T3.15AL250V  | IEC 60127-1<br>IEC 60127-2    | CCC<br>2004010207122270 |
| Alt.              | Dongguan Better Electronics Technology Co., Ltd.  | 524               | T3.15AH250V  | IEC 60127-1<br>IEC 60127-2    | CCC<br>2008010207275342 |
| Alt.              | Conquer Electronics Co., Ltd.                     | PTU               | T3.15A250V   | IEC 60127-1<br>IEC 60127-2    | CCC<br>2003010207031945 |
| Alt.              | Dongguan Better Electronics Technology Co.,Ltd.   | 522               | T16AL250V  | IEC 60127-1<br>IEC 60127-2    | CQC06012017150          |
| Connecting device | Cixi Meigan Electric Appliance Socket Factory     | HB9500            | 300 V, 30 A, 22-12AWG  | IEC 60998-1<br>IEC 60998-2-1  | CQC16003142325          |
| Plug              | ZHONGSHAN WEILAISI ELECTRICAL APPLIANCE CO., LTD. | WS-301            | 10 A, 250V~  | IEC 60884                     | CCC<br>2009010201370975 |
| Cord set          | ZHONGSHAN WEILAISI ELECTRICAL APPLIANCE CO., LTD. | WS-301 + WS-303   | 10 A, 250 V~   | IEC 60799                     | CCC<br>2009010101370973 |
| Socket            | Foshan Shunde Wansheng Electric Co., Ltd.         | WS-C310           | 10 A, 250 V~   | IEC 60320-1                   | CCC<br>2005010204157174 |
| Power cord        | ZHONGSHAN WEILAISI ELECTRICAL APPLIANCE CO., LTD. | 60227 IEC 53(RVV) | 300/500 V, 3G1,0 mm <sup>2</sup> , 3G1,5 mm <sup>2</sup>                   | IEC 60227                     | CCC<br>2010010105385449 |

## IEC 60335-2-24

|   |  |                        |  |           |                             |
|---|--|------------------------|--|-----------|-----------------------------|
| Internal wire   | GUANGDONG<br>YONGRUI<br>CABLE<br>TECHNOLOGY<br>CO., LTD. | 60227 IEC<br>08(BV-90) | 300/500 V;<br>0,75/1,0/1,5 mm <sup>2</sup> | IEC 60227 | CCC<br>20030101050<br>57075 |
| Alt.  | Zhongshan Boyu<br>Wire Co.Ltd.                           | 60227 IEC<br>08(BV-90) | 300/500 V;<br>0,75/1,0/1,5 mm <sup>2</sup> | IEC 60227 | CCC<br>20120101055<br>37986 |
| Supplementary information:<br>1) Provided evidence ensures the agreed level of compliance. See OD-CB2039. |  |                        |  |           |                             |

| 24.5                         | TABLE: Voltage across the capacitor |                   |                      |                               | P |
|------------------------------|-------------------------------------|-------------------|----------------------|-------------------------------|---|
| Under test capacitor         |                                     | Rated Voltage (V) | Measured voltage (V) | Limit (1,1 rated voltage) (V) |   |
| Run capacitor for compressor |                                     | 450               | 403                  | 495                           |   |
| Run capacitor for fan motor  |                                     | 450               | 395                  | 495                           |   |
| Supplementary information:   |                                     |                   |                      |                               |   |

| 28.1                          | TABLE: Threaded part torque test |                               |                       | P |
|-------------------------------|----------------------------------|-------------------------------|-----------------------|---|
| Threaded part identification  | Diameter of thread (mm)          | Column number (I, II, or III) | Applied torque ( Nm ) |   |
| Screw for earthing connection | 3,9                              | II                            | 1,2                   |   |
| Screw for fixed enclosure     | 3,9                              | II                            | 1,2                   |   |
| Screw for cord anchorages     | 3,9                              | II                            | 1,2                   |   |
| Supplementary information:    |                                  |                               |                       |   |

| 29.1                       | TABLE: Clearances          |                     |                    |                 |                 | P                |
|----------------------------|----------------------------|---------------------|--------------------|-----------------|-----------------|------------------|
|                            | Overvoltage category.....: |                     | II                 |                 |                 | —                |
|                            |                            | Type of insulation: |                    |                 |                 |                  |
| Rated impulse voltage (V): | Min. cl (mm)               | Basic (mm)          | Supplementary (mm) | Reinforced (mm) | Functional (mm) | Verdict / Remark |
| 330                        | 0.2* / 0.5 / 0.8**         | —                   | —                  | —               | —               | N/A              |
| 500                        | 0.2* / 0.5 / 0.8**         | —                   | —                  | —               | —               | N/A              |
| 800                        | 0.2* / 0.5 / 0.8**         | —                   | —                  | —               | —               | N/A              |
| 1'500                      | 0.5 / 0.8** / 1.0***       | —                   | —                  | —               | —               | N/A              |
| 2'500                      | 1.5 / 2.0***               | >2,0                | >2,0               | >2,0            | —               | P                |
| 4'000                      | 3.0 / 3.5***               | —                   | —                  | —               | >3,5            | P                |
| 6'000                      | 5.5 / 6.0***               | —                   | —                  | —               | —               | N/A              |
| 8'000                      | 8.0 / 8.5***               | —                   | —                  | —               | —               | N/A              |
| 10'000                     | 11.0 / 11.5***             | —                   | —                  | —               | —               | N/A              |

## IEC 60335-2-24

| 29.1  | TABLE: Clearances | P |
|---|-------------------|---|
| Supplementary information:<br>*) For tracks on printed circuit boards if pollution degree 1 and 2<br>**) For pollution degree 3<br>***) If the construction is affected by wear, distortion, movement of the parts or during assembly the value is increased by 0.5 mm. |                   |   |

| 29.2   | TABLE: Creepage distances, basic, supplementary and reinforced insulation |                |      |           |                |      |            |                    |       |       | P       |
|--|---|----------------|------|-----------|----------------|------|------------|--------------------|-------|-------|---------|
| Working voltage (V)  | Creepage distance (mm)<br>Pollution degree                                |                |      |           |                |      |            |                    |       |       |         |
|  | 1   | 2              |      |           | 3              |      |            | Type of insulation |       |       |         |
|  |   | Material group |      |           | Material group |      |            |                    |       |       |         |
|  |   | I              | II   | IIIa/IIIb | I              | II   | IIIa/IIIb* | B**                | S**   | R**   | Verdict |
| ≤50  | 0.18  | 0.60           | 0.85 | 1.2       | 1.5            | 1.7  | 1.9        |                    | —     | —     | N/A     |
| ≤50  | 0.18  | 0.60           | 0.85 | 1.2       | 1.5            | 1.7  | 1.9        | —                  |       | —     | N/A     |
| ≤50  | 0.36  | 1.20           | 1.70 | 2.4       | 3.0            | 3.4  | 3.8        | —                  | —     |       | N/A     |
| >50 and ≤125   | 0.28  | 0.75           | 1.05 | 1.5       | 1.9            | 2.1  | 2.4        |                    | —     | —     | N/A     |
| >50 and ≤125   | 0.28  | 0.75           | 1.05 | 1.5       | 1.9            | 2.1  | 2.4        | —                  |       | —     | N/A     |
| >50 and ≤125   | 0.56  | 1.50           | 2.10 | 3.0       | 3.8            | 4.2  | 4.8        | —                  | —     |       | N/A     |
| >125 and ≤250  | 0.56  | 1.25           | 1.80 | 2.5       | 3.2            | 3.6  | 4.0        | > 4,0              | —     | —     | P       |
| >125 and ≤250  | 0.56  | 1.25           | 1.80 | 2.5       | 3.2            | 3.6  | 4.0        | —                  | > 4,0 | —     | P       |
| >125 and ≤250  | 1.12  | 2.50           | 3.60 | 5.0       | 6.4            | 7.2  | 8.0        | —                  | —     | > 8,0 | P       |
| >250 and ≤400  | 1.00  | 2.00           | 2.80 | 4.0       | 5.0            | 5.6  | 6.3        |                    | —     | —     | N/A     |
| >250 and ≤400  | 1.00  | 2.00           | 2.80 | 4.0       | 5.0            | 5.6  | 6.3        | —                  |       | —     | N/A     |
| >250 and ≤400  | 2.00  | 4.00           | 5.60 | 8.0       | 10.0           | 11.2 | 12.6       | —                  | —     |       | N/A     |
| Supplementary information:<br>* Material group IIIb is allowed if the working voltage does not exceed 50 V<br>** B = Basic insulation, S = Supplementary insulation, R = Reinforced insulation |   |                |      |           |                |      |            |                    |       |       |         |

## IEC 60335-2-24

| 29.2   | TABLE: Creepage distances, functional insulation |                |     |           |                |     |            | P                |
|--|--|----------------|-----|-----------|----------------|-----|------------|------------------|
| Working voltage (V)  | Creepage distance (mm)<br>Pollution degree       |                |     |           |                |     |            |                  |
|  | 1  | 2              |     |           | 3              |     |            |                  |
|  |  | Material group |     |           | Material group |     |            |                  |
|  |  | I              | II  | IIIa/IIIb | I              | II  | IIIa/IIIb* | Verdict / Remark |
| ≤10  | 0.08   | 0.4            | 0.4 | 0.4       | 1.0            | 1.0 | 1.0        | N/A              |
| >10 and ≤50  | 0.16   | 0.56           | 0.8 | 1.0       | 1.4            | 1.6 | 1.8        | N/A              |
| >50 and ≤125   | 0.25   | 0.71           | 1.0 | 1.4       | 1.8            | 2.0 | 2.2        | N/A              |
| >125 and ≤250  | 0.42   | 1.0            | 1.4 | 2.0       | 2.5            | 2.8 | <b>3.2</b> | P                |
| >250 and ≤400  | 0.75   | 1.6            | 2.2 | 3.2       | 4.0            | 4.5 | 5.0        | N/A              |
| >400 and ≤500  | 1.0  | 2.0            | 2.8 | 4.0       | 5.0            | 5.6 | 6.3        | N/A              |
| Supplementary information:<br>* Material group IIIb is allowed if the working voltage does not exceed 50 V |  |                |     |           |                |     |            |                  |

| 30.1                               | TABLE: Ball pressure test of thermoplastics |                          |                             | P |
|------------------------------------|---|--------------------------|-----------------------------|---|
| Allowed impression diameter (mm) : |   | Less than 2,0 mm         |                             |   |
| Object / Part No./<br>Material     | Manufacturer/<br>Trademark                  | Test temperature<br>(°C) | Impression diameter<br>(mm) |   |
| Plastic enclosure                  | —   | 75                       | 1,1                         |   |
| PCB                                | —   | 125                      | 0,8                         |   |
| Terminal block                     | —   | 125                      | 0,6                         |   |
| Connector on<br>main board         | —   | 125                      | 0,9                         |   |
| Supplementary information:         |   |                          |                             |   |

## IEC 60335-2-24

| 30.2   | TABLE: Resistance to heat and fire - Glow wire tests |   |     |     |     |                             |     | P       |
|--|--|---|-----|-----|-----|-----------------------------|-----|---------|
| Object / Part No./<br>Material   | Manufacturer/<br>Trademark                           | Glow wire test (GWT); (°C)              |     |     |     |                             |     | Verdict |
|  |  | 550                                     | 650 |     | 750 |                             | 850 |         |
|  |  |   | te  | ti  | te  | ti                          |     |         |
| Plastic enclosure  | —  | P                                       | N/A | N/A | N/A | N/A                         | N/A | P       |
| Fan motor bobbin   | —  | P                                       | N/A | N/A | N/A | N/A                         | N/A | P       |
| Terminal block   | —  | N/A                                     | N/A | N/A | P   | P                           | N/A | P       |
| Transformer bobbin   | —  | N/A                                     | N/A | N/A | P   | P                           | N/A | P       |
| Relays   | —  | N/A                                     | N/A | N/A | P   | P                           | N/A | P       |
| Connector on main board  | —  | N/A                                     | N/A | N/A | P   | P                           | N/A | P       |
| Terminal sheathed  | —  | N/A                                     | N/A | N/A | P   | P                           | N/A | P       |
| Object / Part No./<br>Material   | Manufacturer/<br>Trademark                           | Glow-wire flammability index (GWFI), °C |     |     |     | GW ignition temp.(GWIT), °C |     | Verdict |
|  |  | 550                                     | 650 | 750 | 850 | 675                         | 775 |         |
| Plastic enclosure  | —  | N/A                                     | N/A | N/A | N/A | N/A                         | N/A | P       |
| Fan motor bobbin   | —  | N/A                                     | N/A | N/A | N/A | N/A                         | N/A | P       |
| Terminal block   | —  | N/A                                     | N/A | N/A | P   | N/A                         | N/A | P       |
| Transformer bobbin   | —  | N/A                                     | N/A | N/A | P   | N/A                         | N/A | P       |
| Relays   | —  | N/A                                     | N/A | N/A | P   | N/A                         | N/A | P       |
| Connector on main board  | —  | N/A                                     | N/A | N/A | P   | N/A                         | N/A | P       |
| Terminal sheathed  | —  | N/A                                     | N/A | N/A | P   | N/A                         | N/A | P       |
| The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2 s] (Yes / No):   |  |   |     |     |     |                             |     | Yes     |
| If no, then surrounding parts passed the needle-flame test of annex E (Yes / No)..... :  |  |   |     |     |     |                             |     | No      |
| The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes / No)?..... :  |  |   |     |     |     |                             |     | Yes     |
| Ignition of the specified layer placed underneath the test specimen (Yes / No)..... :  |  |   |     |     |     |                             |     | No      |
| Supplementary information:<br>- 550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF<br>- The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances |  |   |     |     |     |                             |     |         |

## IEC 60335-2-24

| <b>30.2/30.4</b>   | <b>TABLE: Needle- flame test (NFT)</b> |   |  |                                    | <b>P</b> |
|--|--|---|--|------------------------------------|----------|
| Object / Part No./<br>Material   | Manufacturer/<br>trademark             | Duration of<br>application of test<br>flame (ta); (s) | Ignition of<br>specified layer<br>Yes / No | Duration of<br>burning (tb)<br>(s) | Verdict  |
| PCB  | —                                      | 15  | No   | 0                                  | P        |
| Supplementary information:<br>- NFT not relevant (or applicable) for parts of material classified as V-0 or V-1<br>- NFT not relevant (or applicable) for base material of PCBs classified as V-0 or if relevant VTM-0 |  |   |  |                                    |          |

|                                 |   |                    |                    |        |                    |             |
|---------------------------------|---|--------------------|--------------------|--------|--------------------|-------------|
| AA                              | TABLE: Locked-rotor test of fan motors, windings temperature limit measurements |                    |                    |        |                    | P           |
|                                 | Test voltage (V).....:  |                    | 240 V              |        | —                  |             |
|                                 | Ambient, T <sub>1</sub> (°C).....:  |                    | 23,0               |        | —                  |             |
|                                 | Ambient, T <sub>2</sub> (°C).....:  |                    | 23,0               |        | —                  |             |
| Temperature limit T of winding: |   | R <sub>1</sub> (Ω) | R <sub>2</sub> (Ω) | ΔT (K) | T (°C)             | Max. T (°C) |
| Fan motor                       |   | 483,7              | 645,0              | 85,9   | 108,9              | 175         |
| Supplementary information:      |   |                    |                    |        |                    |             |
|                                 | TABLE: Electric strength measurements   |                    |                    |        |                    | P           |
| Test voltage applied between:   |   |                    | Test voltage (V)   |        | Breakdown Yes / No |             |
| Windings and the body           |   |                    | 1250               |        | No                 |             |
| Supplementary information:      |   |                    |                    |        |                    |             |
|                                 | TABLE: Leakage current measurements   |                    |                    |        |                    | P           |
|                                 | A voltage equal to twice the rated voltage (V).....:                            |                    | 480 V              |        | —                  |             |
| Leakage current I between :     |   |                    | I (mA)             |        | Required I (mA)    |             |
| Windings and the body           |   |                    | 0,103              |        | 2                  |             |
| Supplementary information:      |   |                    |                    |        |                    |             |



|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



IEC 60335-2-24

Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom

A photograph showing the front of a white, rectangular appliance, identified as a KLR-50LA. The appliance has a small, square, recessed panel near the top center and a larger, dark rectangular opening below it. It is positioned on a green surface, and a measuring tape is visible along the left and bottom edges of the frame.

Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom

A photograph showing the front of a white, rectangular appliance, identified as a KLR-50LA. The appliance has a large, rectangular, recessed panel with horizontal slats near the top center and a smaller, dark rectangular opening below it. It is positioned on a green surface, and a measuring tape is visible along the left and bottom edges of the frame.

|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA



Details of: KLR-50LA



|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom

Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top


☐ bottom

|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA



Details of: KLR-50LA

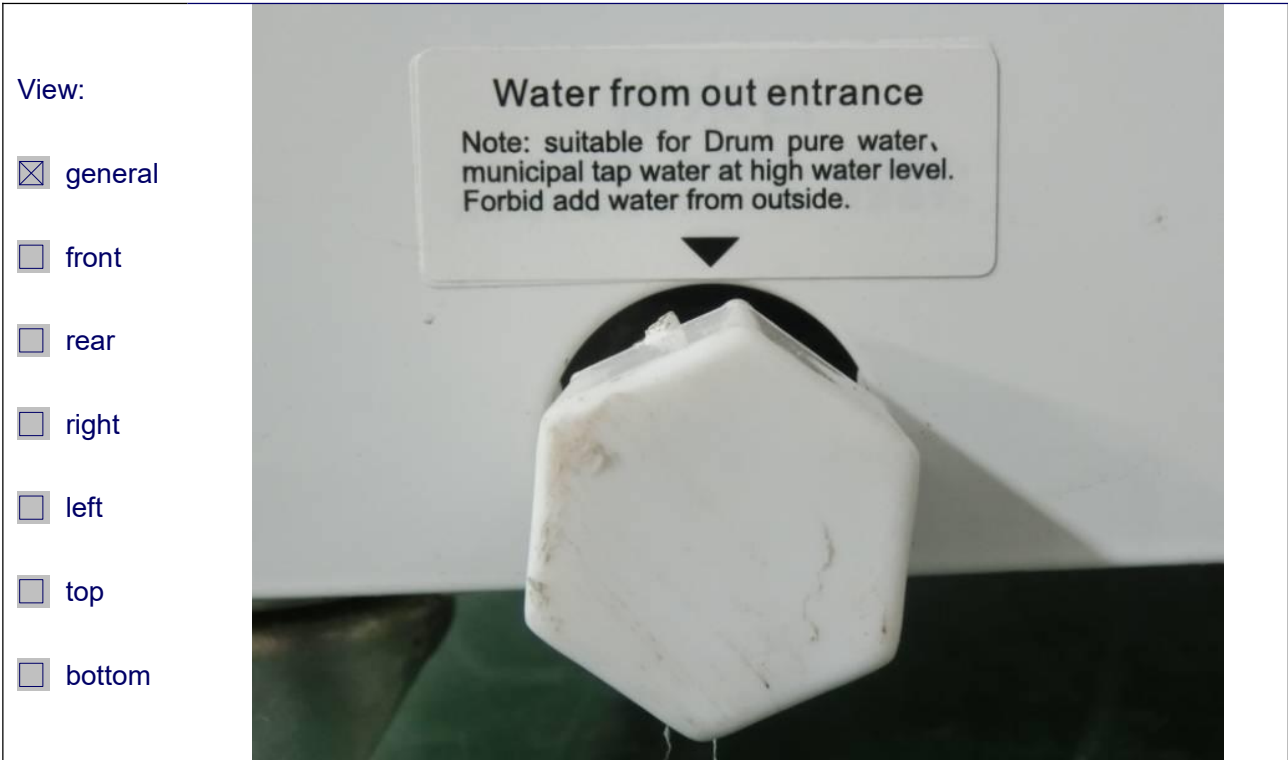

|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:

☒ general

☐ front


☐ rear

☐ right

☐ left

☐ top

☐ bottom

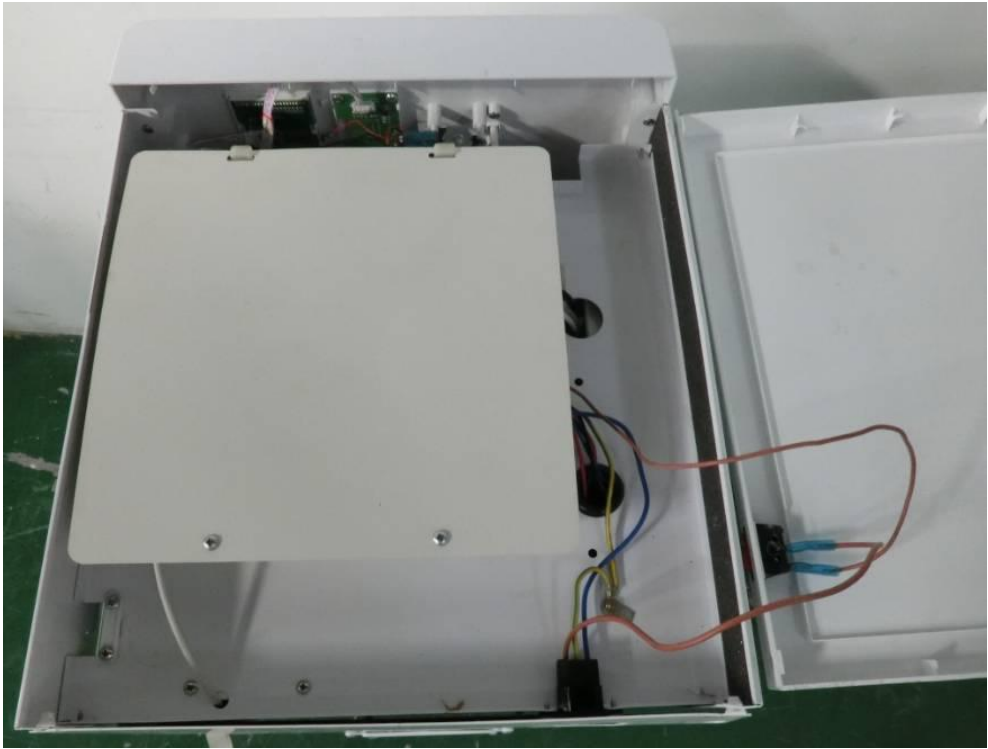A photograph showing the interior of a white plastic enclosure for the KLR-50LA device. The top cover is hinged open to the right. Inside, a large white rectangular panel is mounted in the center. To the right of this panel, there is a complex arrangement of electronic components, including a green printed circuit board (PCB) at the top, various resistors, capacitors, and integrated circuits. A bundle of multi-colored wires (red, blue, yellow, green, black) is routed along the right side and bottom of the enclosure. The device is resting on a green surface.

Details of: KLR-50LA

View:

☒ general

☐ front


☐ rear

☐ right

☐ left

☐ top

☐ bottom

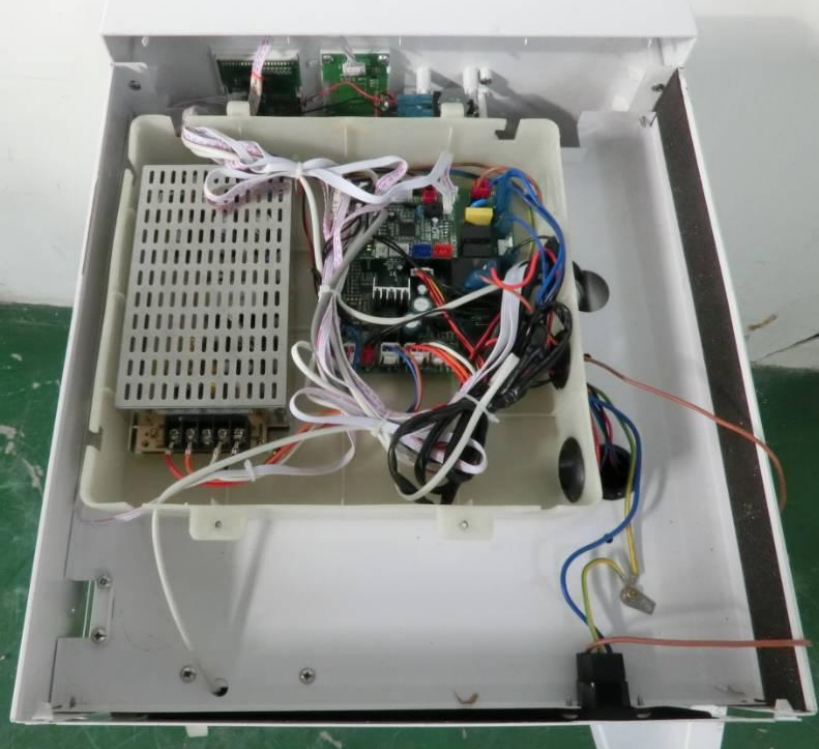A photograph showing the interior of the same white plastic enclosure. In this view, the large white rectangular panel is removed, revealing the internal electronic components more clearly. A prominent feature is a white perforated metal heat sink or shield on the left side. The green PCB and various electronic components are visible in the center. The same bundle of multi-colored wires is present, routed through the enclosure. The device is resting on a green surface.




|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:


- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom

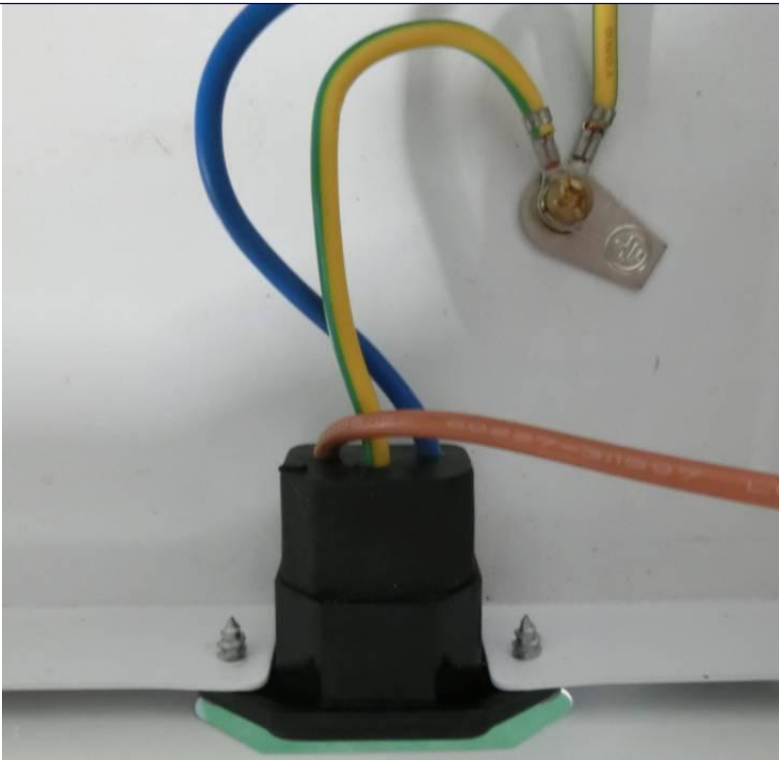

Details of: KLR-50LA


View:

- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom

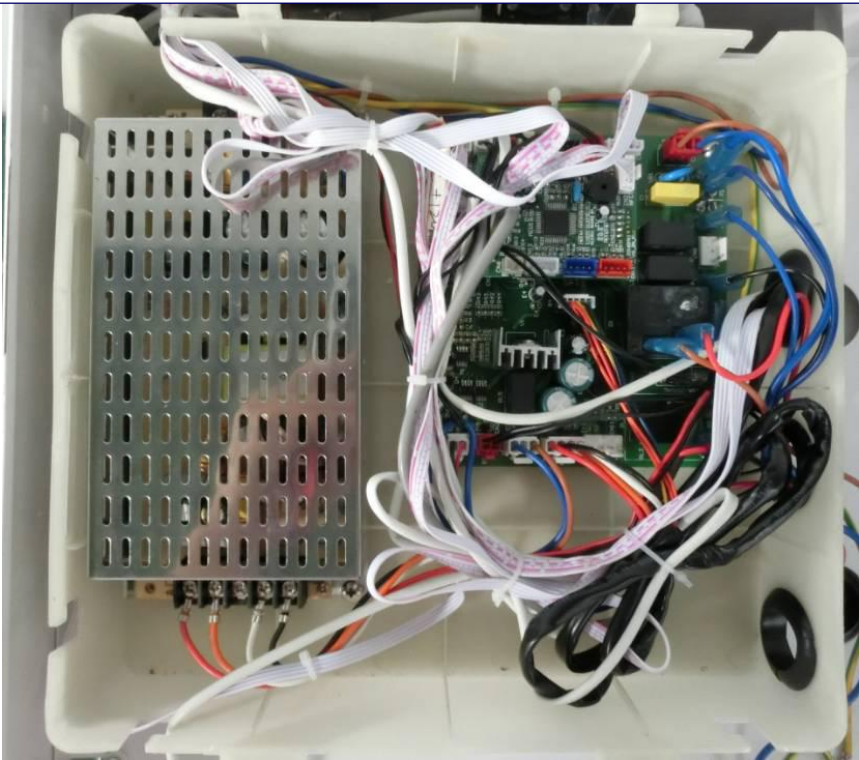

|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

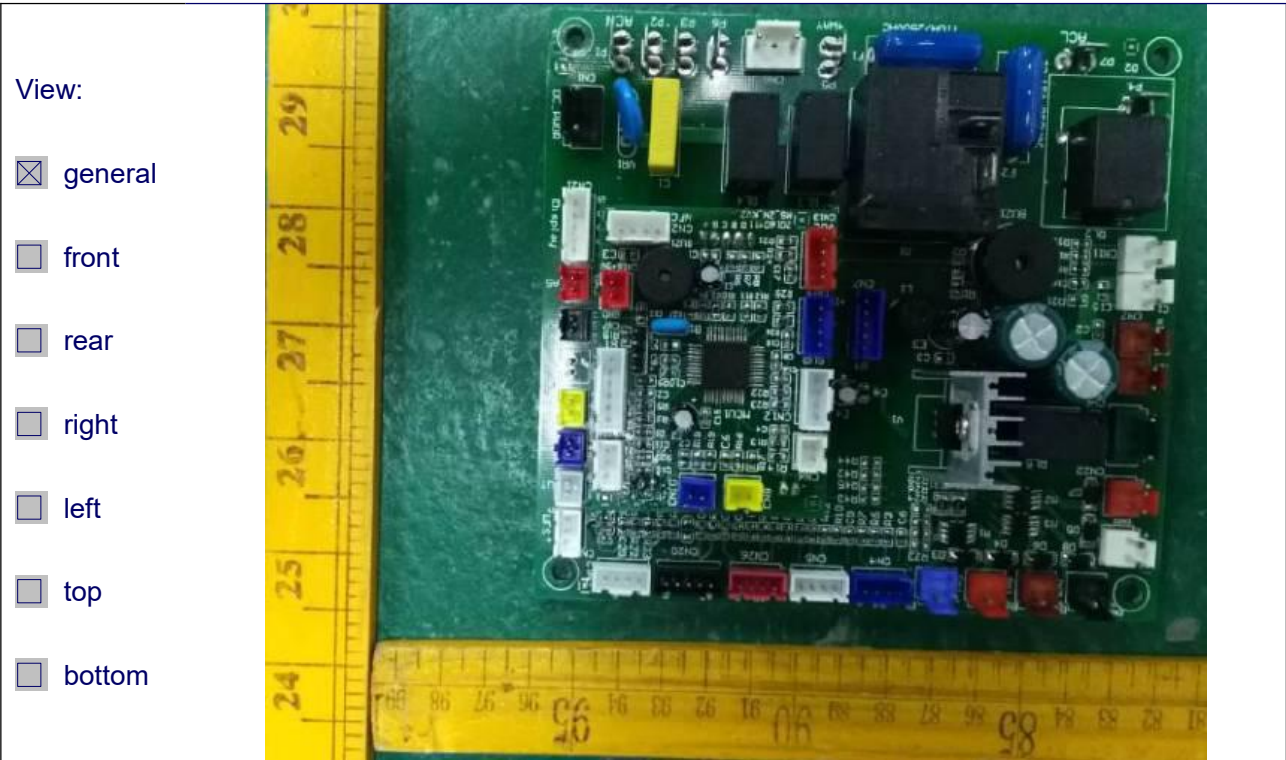

Details of: KLR-50LA






|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:


- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom

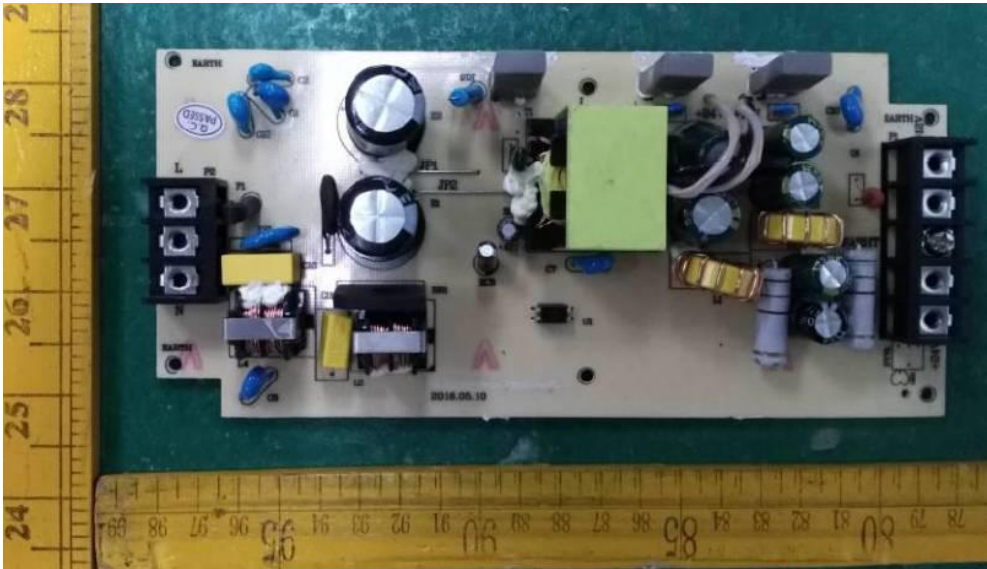

Details of: KLR-50LA

View:

- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom

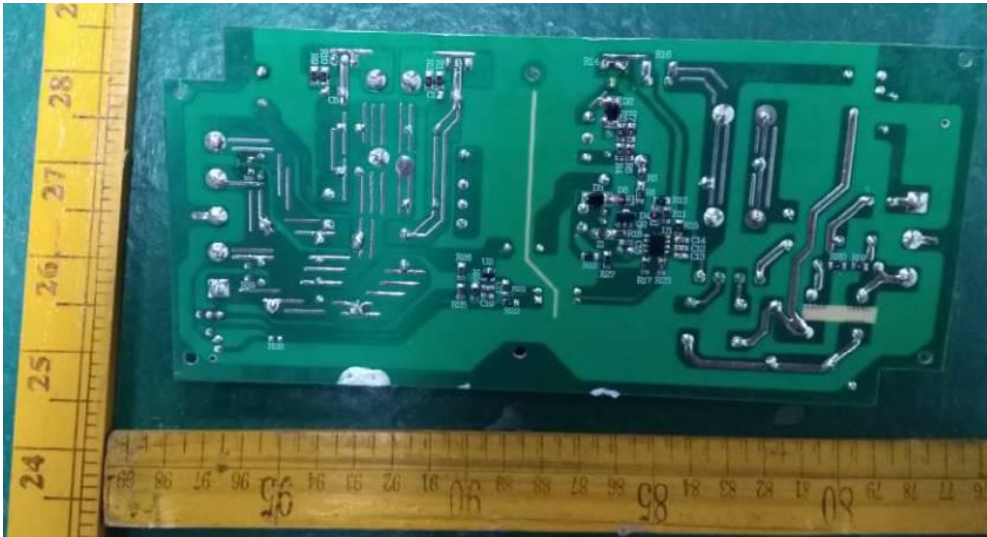


|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:

- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom

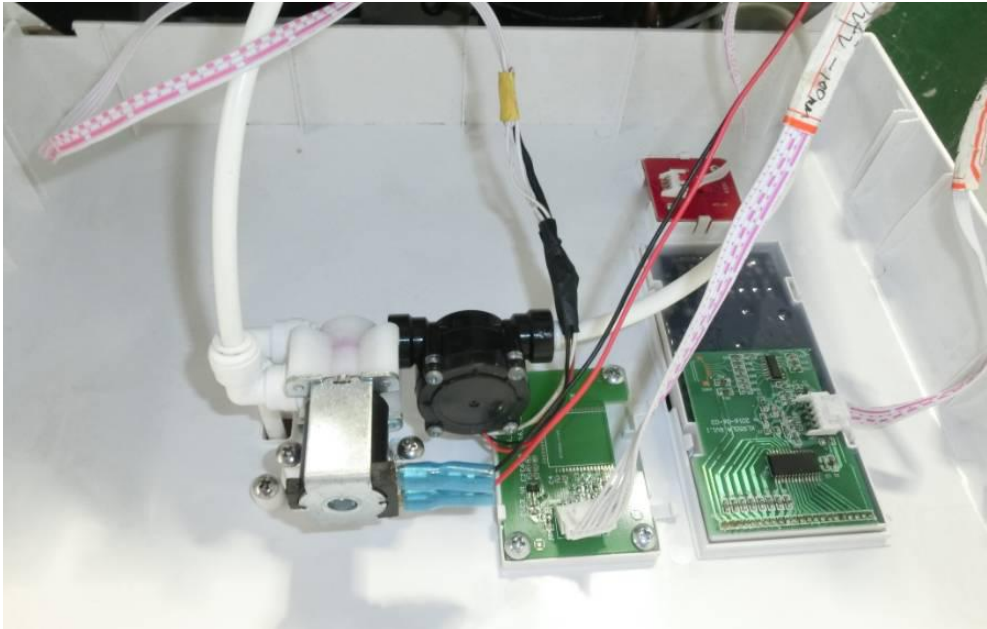

Details of: KLR-50LA


View:

- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom




|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

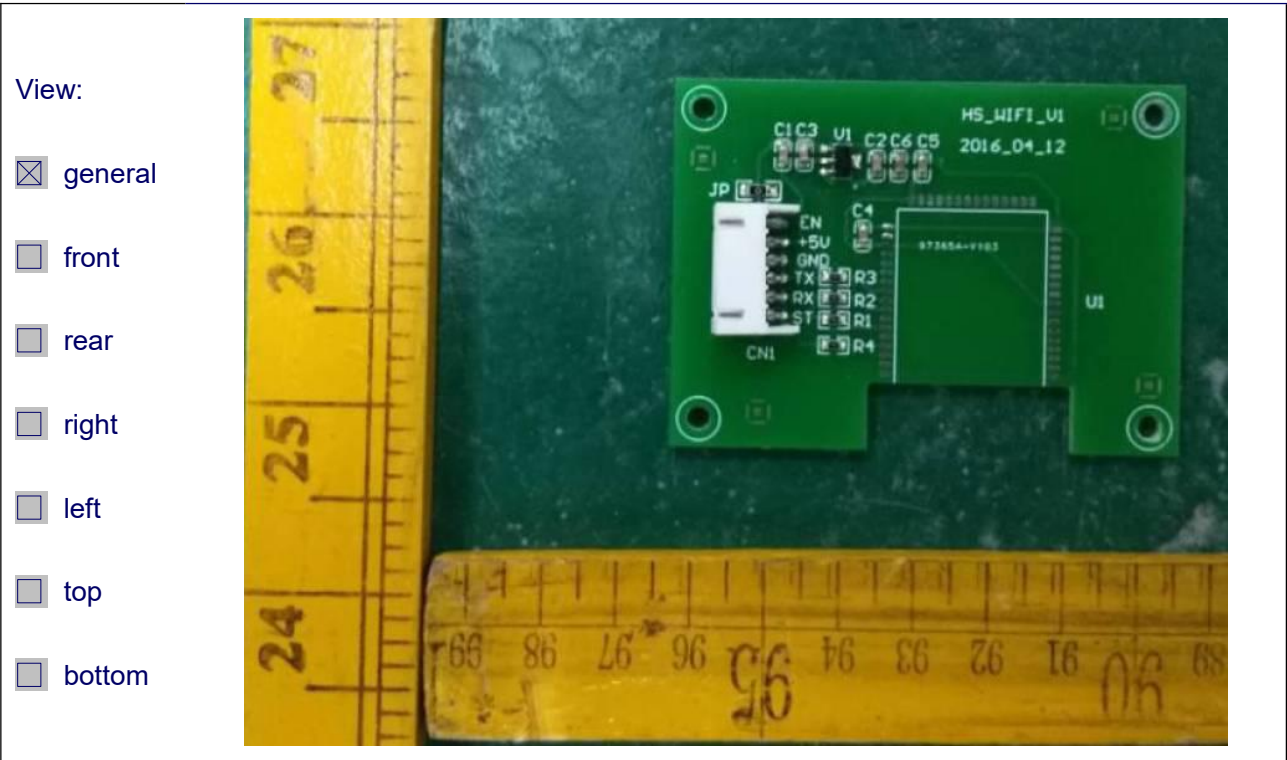


Details of: KLR-50LA

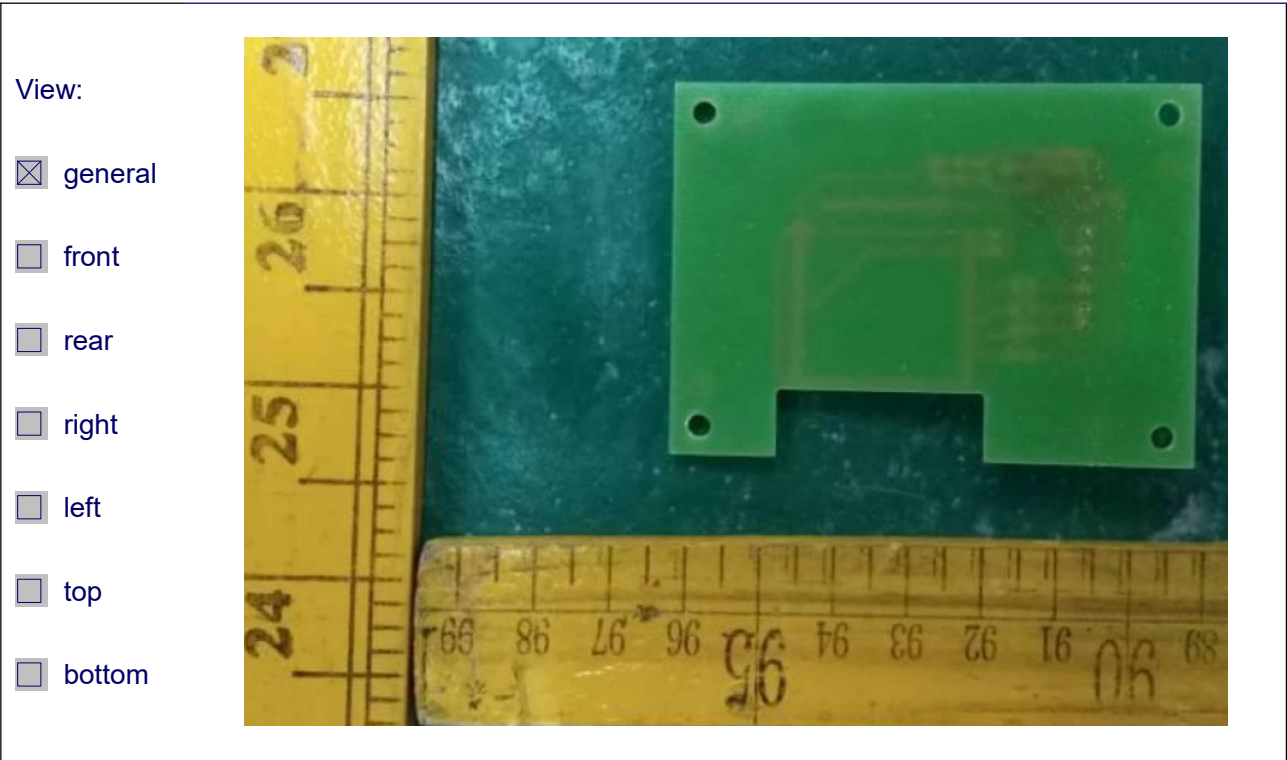




|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

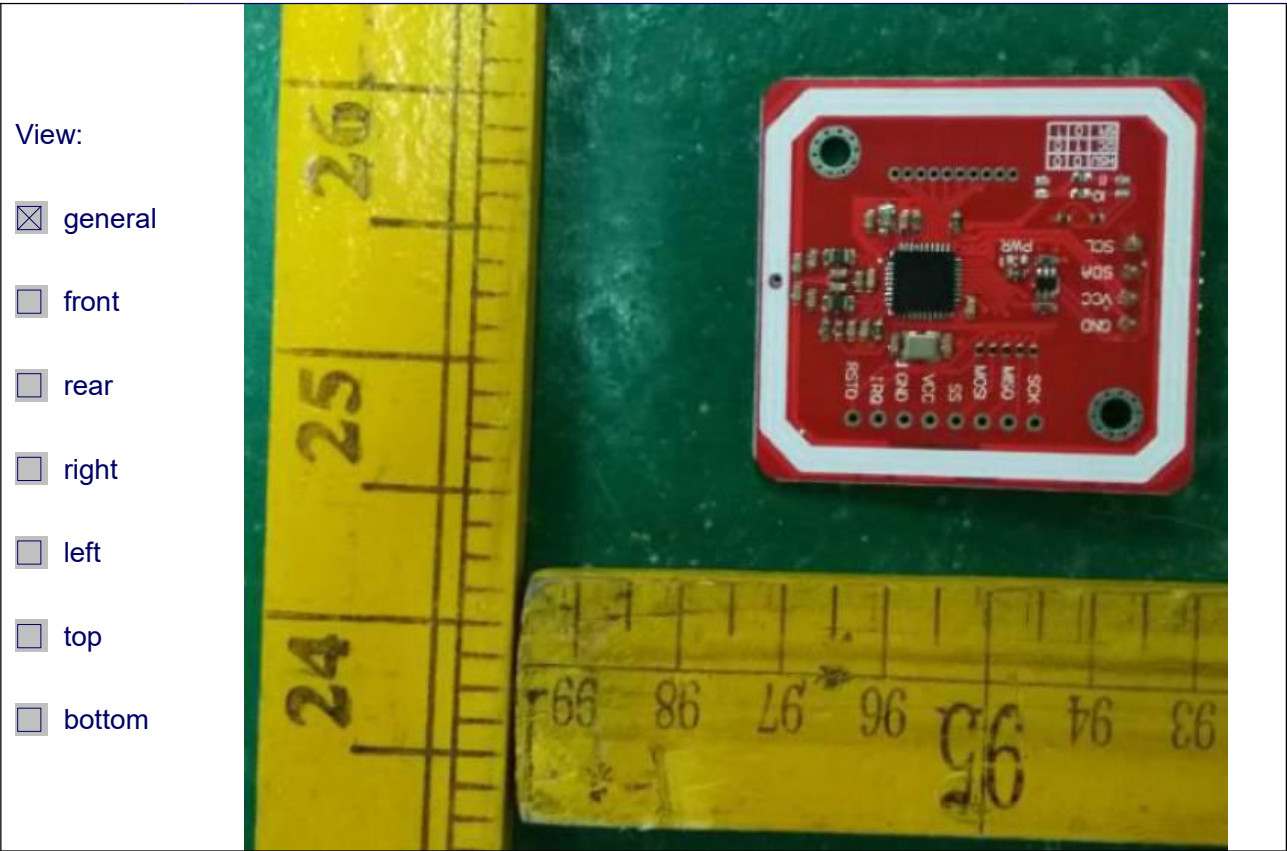

Details of: KLR-50LA

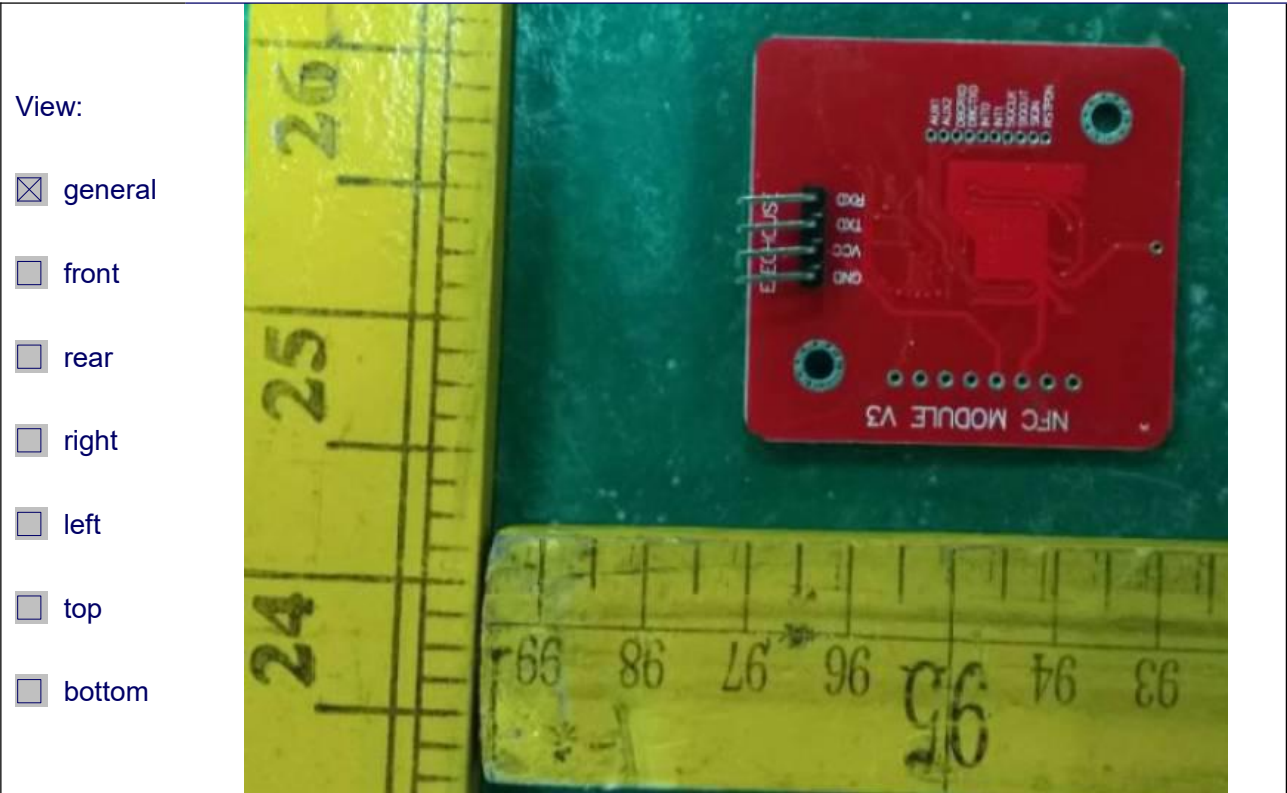

|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



Details of: KLR-50LA

View:

☒ general

☐ front


☐ rear

☐ right

☐ left

☐ top

☐ bottom

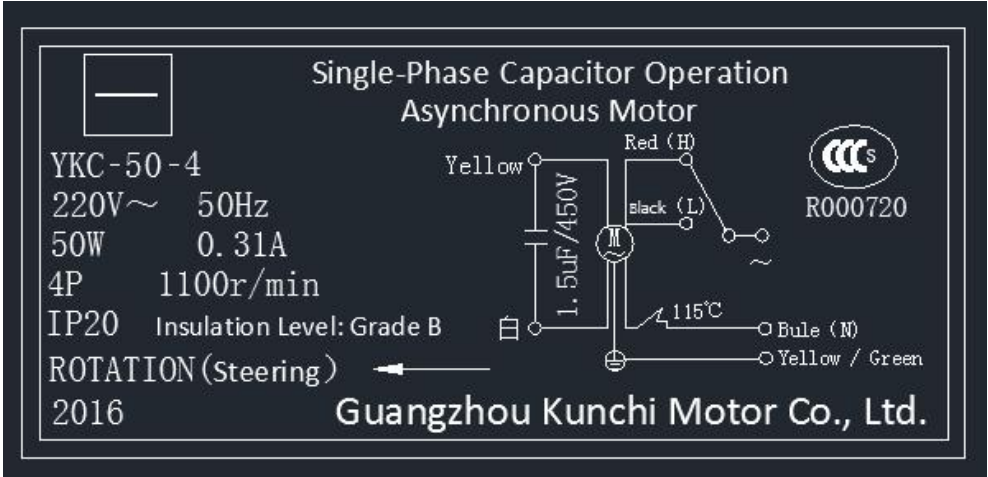

|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:

- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom



Details of: KLR-50LA

View:

- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom





|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



Details of: KLR-50LA

View:

☒ general

☐ front


☐ rear

☐ right

☐ left

☐ top

☐ bottom

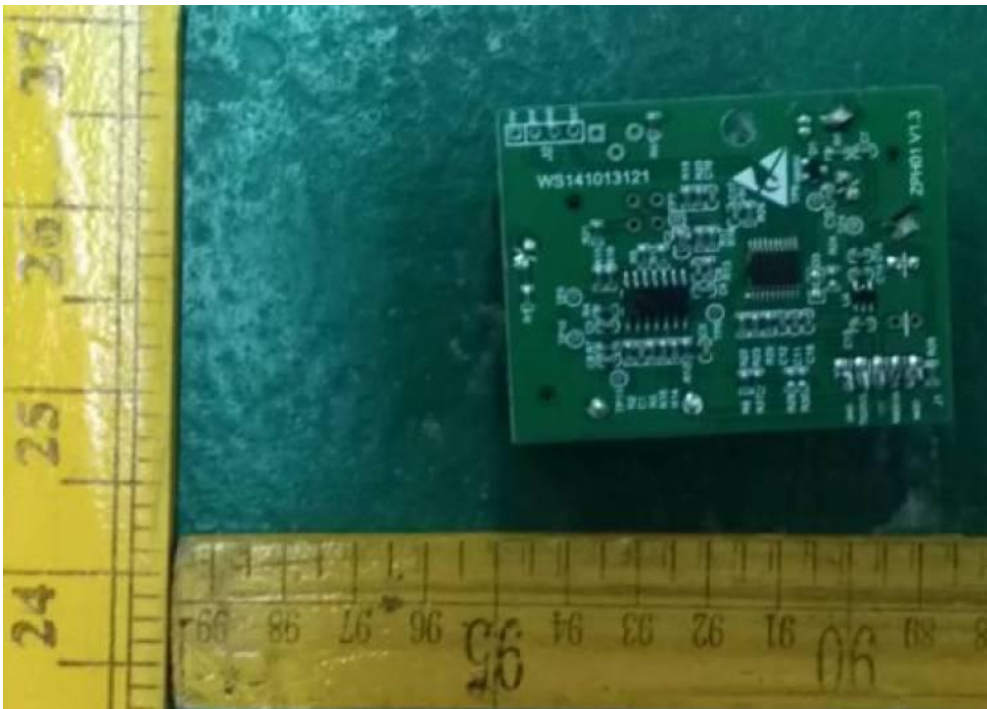

|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA



Details of: KLR-50LA





|                |
|----------------|
| IEC 60335-2-24 |
|----------------|

Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



Details of: KLR-50LA

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom

